


## Tile installation accessories

There are different situations where even a small detail can quickly and successfully solve an installation problem or simply speed up the work of applicators, avoiding time-consuming touch-ups or adjustments.

The widespread use of large scale format tiles in modern design interiors has opened the door for new and innovative solutions in tile installation.

To complete its vast line of profiles, Profiltec proposes a range of tile laying installation accessories which meets both professional and do-it-yourself requirements.

Spacers, profiles for carpet runners and entrance mats, and custom-made profiles in a wide variety of materials satisfy all customer needs.

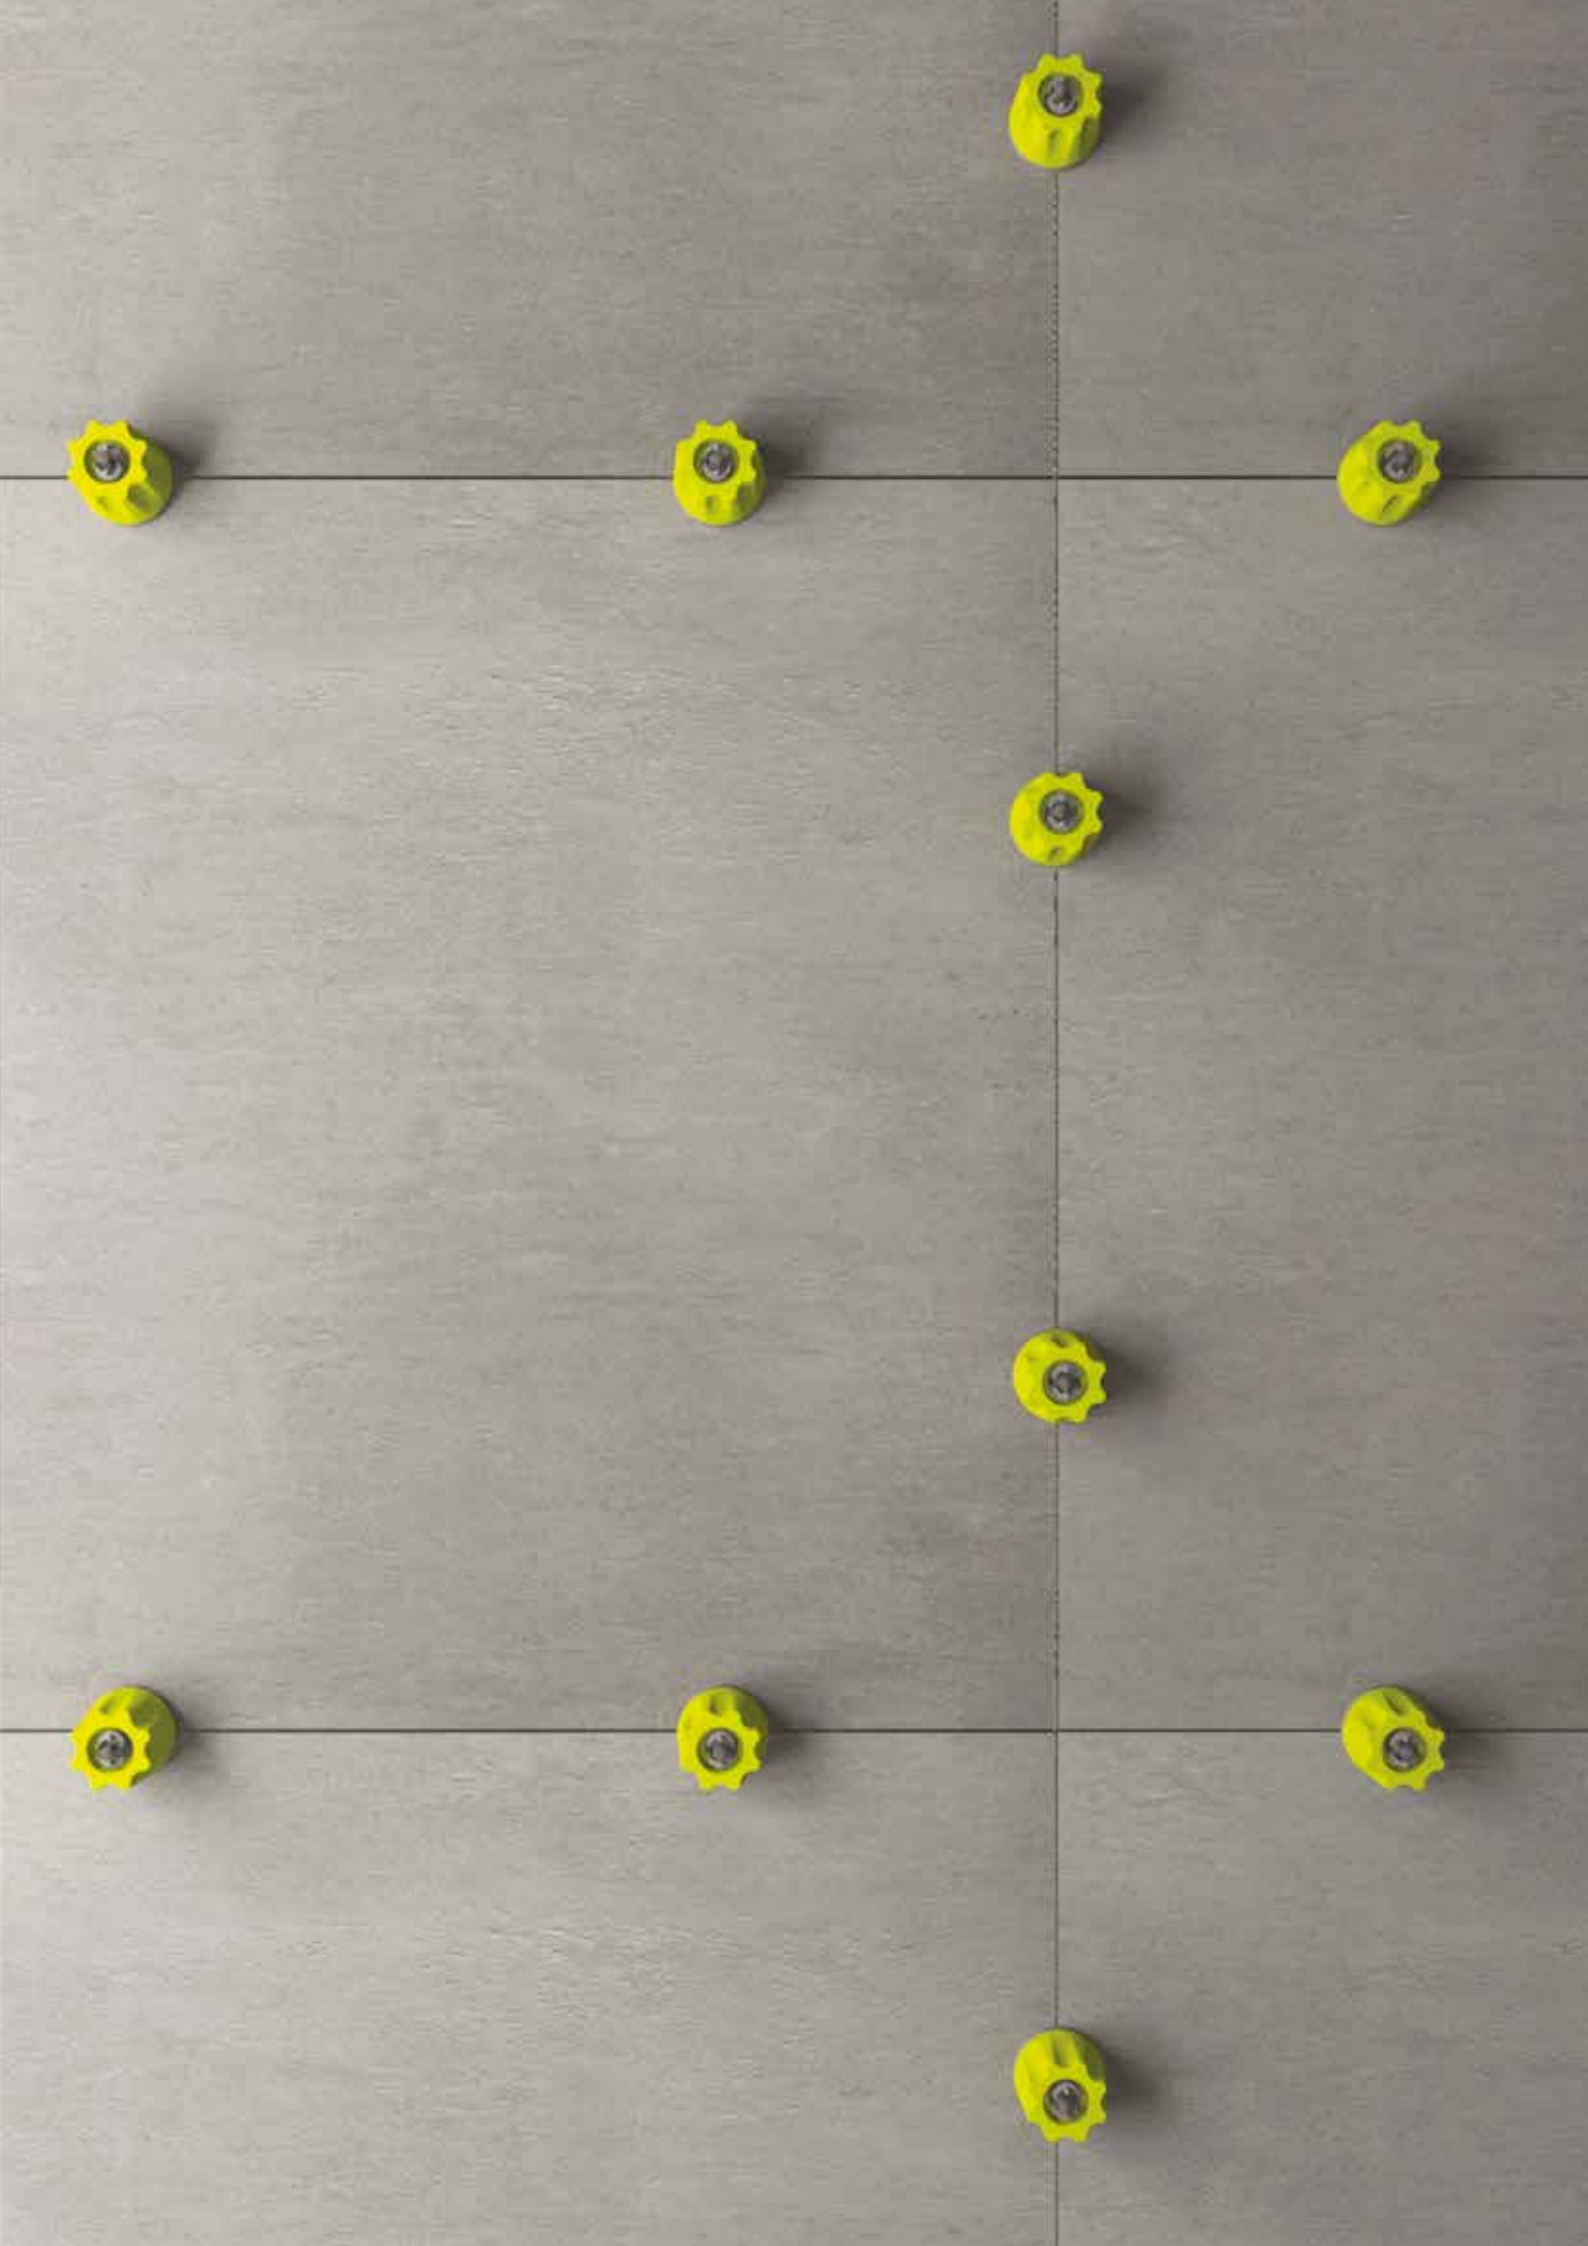



## Tile leveling system

Leveltec is a patented laying system representing a revolutionary advance over any of the proposals seen on the market to date, being the first leveling system that requires no tools for neither assembly nor disassembly.

Leveltec consists of a reusable cap and a series of tie-bases (linear, "T", cross) that allow for 2, 3 or 5 mm joints (in accordance with UNI 11493) or 1 mm joints. The cap can be used with all the tie-bases chosen, according to the type of tiling and laying to be carried out.



# Leveltec advantages



Quick positioning



Wide range of tie-bases made of high performance propylene



Patented system that does not require pliers or unscrew-drivers




Automatic ejection of the tie-base



Large base cap for a homogeneous pressure distribution



The arrowhead indicates the joint direction




Reusable cap

Problem



Solution

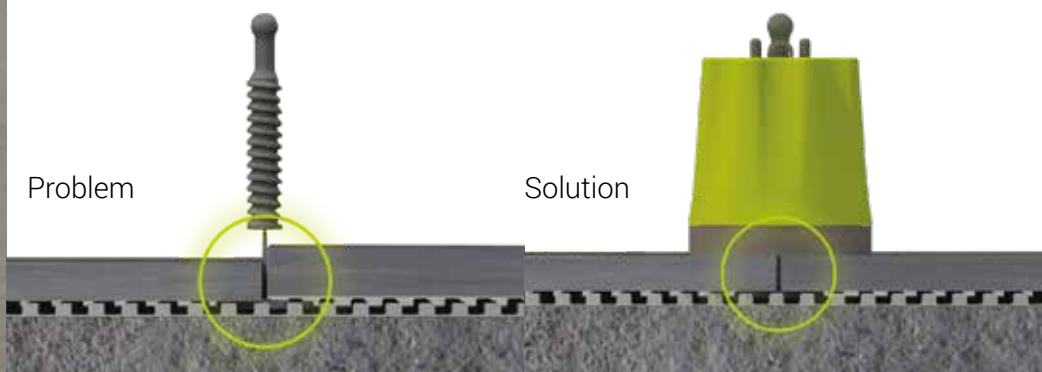





# Phases of usage




Place the tie-base under the floor or wall covering.

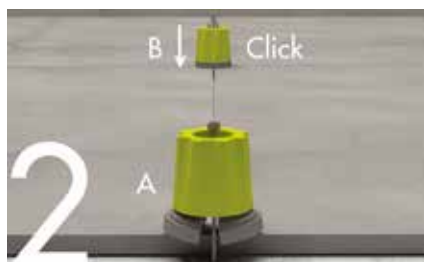


Insert the cap vertically until it touches the tile without screwing. Just one click to automatically fix it to the tie base thread.

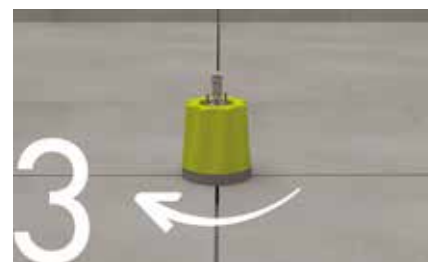

Level the tiles by rotating the cap a few degrees.

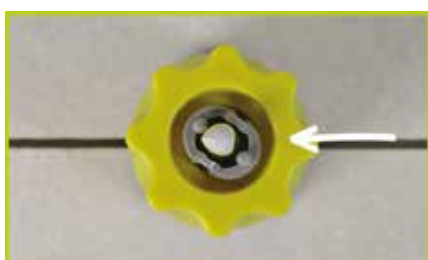

Pointed head = Joint direction

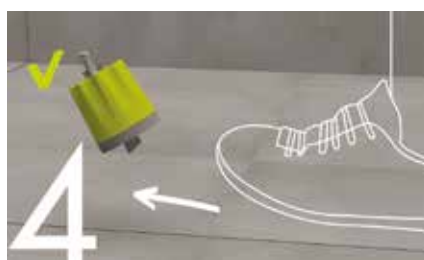


Remove the cap when the glue is completely dry. Be careful to follow the same direction of the joint.







Put pressure on the protruding tie-base to uncouple the cap without unscrewing .




# Linear tie-base







leveltec laying system >> Linear tie-base							
Cod.	Description	€/pck	pc/pck	€/pc	€/pallet	pcs/pallet	
LEV/10	LEVELTEC LINEAR TIE-BASE TH1MM SET/250	46,30	250	0,18	14'816,00	80'000	
LEV/20	LEVELTEC LINEAR TIE-BASE TH2MM SET/250	46,30	250	0,18	14'816,00	80'000	
LEV/30	LEVELTEC LINEAR TIE-BASE TH3MM SET/250	46,30	250	0,18	9'260,00	50'000	
LEV/50	LEVELTEC LINEAR TIE-BASE TH5MM SET/250	46,30	250	0,18	9'260,00	50'000	

Suitable for medium/big format tiles


# "T" tie-base leveling







leveltec laying system >> "T" tie-base							
Cod.	Description	€/pck	pc/pck	€/pc	€/pallet	pcs/pallet	
LEV/10T	LEVELTEC "T" TIE-BASE TH1MM SET/250	50,00	250	0,20	10'000,00	50'000	
LEV/20T	LEVELTEC "T" TIE-BASE TH2MM SET/250	50,00	250	0,20	10'000,00	50'000	
LEV/30T	LEVELTEC "T" TIE-BASE TH3MM SET/250	50,00	250	0,20	10'000,00	50'000	
LEV/50T	LEVELTEC "T" TIE-BASE TH5MM SET/250	50,00	250	0,20	10'000,00	50'000	

Suitable for straight course laying

# Cross tie-base leveling




leveltec laying system >> cross tie-base							
Cod.	Description	€/pck	pc/pck	€/pc	€/pallet	pcs/pallet	
LEV/10C	LEVELTEC CROSS TIE-BASE TH1MM SET/250	50,00	250	0,20	10'000,00	50'000	
LEV/20C	LEVELTEC CROSS TIE-BASE TH2MM SET/250	50,00	250	0,20	10'000,00	50'000	
LEV/30C	LEVELTEC CROSS TIE-BASE TH3MM SET/250	50,00	250	0,20	10'000,00	50'000	
LEV/50C	LEVELTEC CROSS TIE-BASE TH5MM SET/250	50,00	250	0,20	10'000,00	50'000	


Suitable for small format tiles

For quantities below 10 packages 10% price increase applied

# Cap



To be used only with Profiltec tie-bases


leveltec leveling system >> Screw leveling system just with a click						
Cod.	Description	€/ pck	pc / pck	€/ pc	€/ pallet	pcs / pallet
LEV/M	LEVELTEC AUTOMATIC CAP ASSEMBLED SET/50	62,50	50	1,25	4'500,00	3'600 

For quantities below 6 packages 10% price increase applied

## Quantity of tie-bases for m<sup>2</sup>

A \ B	20	25	30	33	40	45	50	60	80	90	100	120
20	50	40	50	45	37	33	30	25	25	22	25	21
25	40	32	40	36	30	27	24	20	20	18	20	17
30	50	40	44	40	33	30	27	22	21	19	20	17
33	45	36	40	37	30	27	24	20	19	7	18	15
40	47	30	33	30	25	22	20	17	16	14	15	13
45	33	27	30	27	22	20	18	15	14	12	13	11
50	30	24	27	24	20	18	16	13	12	11	12	10
60	25	20	22	20	17	15	13	11	10	9	10	8
80	25	20	21	19	7	14	12	10	9	8	9	7
90	22	18	19	7	14	12	11	9	8	7	8	6
100	25	20	20	18	15	13	12	10	9	8	8	7
120	21	17	17	15	13	11	10	8	7	6	7	6

Tie bases suitable for tiles from 3 to 20 mm (LEV/20, LEV/30, LEV/50 full range) or from 3 to 12,5mm (LEV/10 full range)






# spacers DIC

Perforated plastic spacers for a regular and gauged grout joint tiling in wall and floor coverings. Realised in synthetic material resistant to chemical agents. Available in all the sizes normally required by tile joints. Their anti-floating shape is conceived to keep the spacer imbedded into the fresh grout during tiling and beating (from DIC 30 to DIC 100). Delivered in 500 pcs bags organized in dispenser displays.



DIC20



## DIC - Polypropylene

H1 = 4 mm (DIC10/15/20/30/40/50)

H1 = 6 mm (DIC70)

H1 = 8 mm (DIC100)

## DIC - Polypropylene


tile spacers » DIC cross-shaped					
Cod.	B mm	Finish	€/ pck	pck	
DIC10	1	- Polypropylene	4,94	500	
DIC15	1,5	- Polypropylene	4,98	500	
DIC20	2	- Polypropylene	5,00	500	
DIC30	3	- Polypropylene	5,74	500	
DIC40	4	- Polypropylene	5,98	500	
DIC50	5	- Polypropylene	6,37	500	
DIC70	7	- Polypropylene	10,10	500	
DIC100	10	- Polypropylene	16,96	500	

# spacers DIT

Perforated plastic spacers for a regular and gauged grout joint tiling in wall and floor coverings. Realised in synthetic material resistant to chemical agents. Available in all the sizes normally required by tile joints. Their anti-floating shape is conceived to keep the spacer imbedded into the fresh grout during tiling and beating (from DIC 30 to DIC 100). Delivered in 500 pcs bags organized in dispenser displays.



DIT20



## DIT - Polypropylene

H1 = 4 mm (DIT10/20/30/40/50)

H1 = 6 mm (DIT70)

H1 = 8 mm (DIT100)



Self Service Box

## DIT - Polypropylene

tile spacers » DIT "T"-shaped					
Cod.	B mm	Finish	€/ pck	pck	
DIT10	1	- Polypropylene	4,94	500	
DIT20	2	- Polypropylene	5,00	500	
DIT30	3	- Polypropylene	5,74	500	
DIT40	4	- Polypropylene	5,98	500	
DIT50	5	- Polypropylene	6,37	500	
DIT70	7	- Polypropylene	10,10	500	
DIT100	10	- Polypropylene	16,96	500	



# spacers DIS

Perforated plastic spacers for a regular and gauged grout joint tiling in wall and floor coverings. Realised in synthetic material resistant to chemical agents. Available in all the sizes normally required by tile joints. Their anti-floating shape is conceived to keep the spacer imbedded into the fresh grout during tiling and beating (from DIC 30 to DIC 100). Delivered in 500 pcs bags organized in dispenser displays.



DIS50




DIS - Polypropylene

## DIS - Polypropylene


tile spacers » DIS					
Cod.	B mm	Finish	€ / pck	pck	
DIS50	5	- Polypropylene	5,74	500	

# Magtec

A magnetic device for creation of a discrete tiled acces panel with four magnetic tabs placed on the corners. It is a universal application suitable for all types of tiles, ensuring a neat finish. Can be easily removed and replaced at all times.

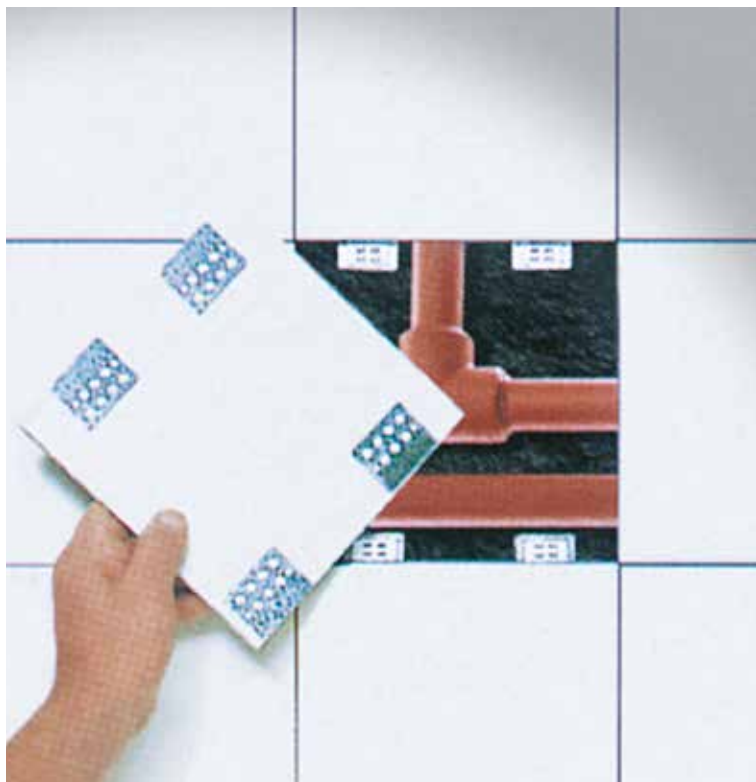

MAG



MAG

## MAG



MAG - SET

magnets » for tiled wall-panel inspection - 4 magnets + 4 plates			
Cod.	Finish	€/pck	pcs
MAG	- Galvanised	13,22	4