

PRICE LIST 2025 EN
OUTDOOR

Index by range



Pedestals for raised floors

uptec and uptec FX	8
SUPATRAY	24
support 80	37



Perimeter profiles for terraces

bordertec BSR	38
bordertec BSJ	40
bordertec BST20	41



Membranes

draintec 8	42
draintec 8S	43
FIXXTEC	28



Drainage systems

multidrain MUD - MUDR	44
-----------------------	----



Tile installation accessories

spacers DISC	46
--------------	----



Marketing

Table Display	48
Illustrative Brochure	48
Set Sample	48
Display	49
Price list	49
Technical Manual	49





Alphabetical index

Code	Range	Family	Page
80	Pedestals for raised floors	glue screed	37
BRO	Marketing	illustrative brochure	48
BSJ	Perimeter profiles for terraces	bordertec	40
BSR	Perimeter profiles for terraces	bordertec	38
BST20	Perimeter profiles for terraces	bordertec	41
CHAIN	Marketing	chains	48
DISC	Tile installation accessories	tile spacers	46
DISP	Marketing	display	49
DRAINTEC-8	Membranes	draintec	42
DRAINTEC-8S	Membranes	draintec	43
FIXXTEC	Membranes	fixxtec	28
LIST	Marketing	price lists	49
MUD - MUDR	Drainage systems	multidrain	44
SUPAANG240	Pedestals for raised floors	uptec	20
SUPATRAY	Pedestals for raised floors	uptec	24
SUPT/SUPT4	Pedestals for raised floors	uptec	18
TDIS	Marketing	table display	48
uptec	Pedestals for raised floors	uptec	9





The company

A PARTNER. YOU DON'T NEED JUST A SIMPLE SUPPLIER

There are many suppliers out there, but only a few are partners who stand right by your side. How are we your partner? By studying your needs and offering solutions and systems that resolve real problems. We make products for the installation of wall and floor coverings that are easy to use, durable, versatile and with undisputable quality, whilst guaranteeing fast delivery times, offering punctual and reliable assistance, collaborating with you to personalize products and solutions which other companies, be it because of size, lack of production organization or manufacturing capability, are not able to provide. All this because we know the job of the installer, the reseller, the architect and the contractor, each one with their own specific needs and priorities.

EXCELLENT LOGISTICS: NEVER WAIT FOR YOUR PRODUCTS

Millions of meters of profiles in the warehouse, ready for delivery, aiming to process all of your orders within 48 hours. This means that we're able to give you the right product, at the right time, at the right place (even at the job site), in the quantity and timing you prefer. It's a supply chain you can count on, with precise delivery worldwide: we serve more than 10,000 clients in 90 countries with 7,000 products.



Quality and environment

Profiltec has implemented and applies a quality and environmental management system in accordance with UNI EN ISO 9001:2015 and UNI EN ISO 14001:2015. It's an organizational model capable of continuously measuring and improving business and environmental performance.


The choice of attention to the environment has also led to EPD (Environmental Product Declaration) certification in accordance with ISO 14025 and EN 15804:2012+A2:2019, as a demonstration of commitment to increasingly reduce CO2 emissions to the environment from its products.





Pedestals for raised floors



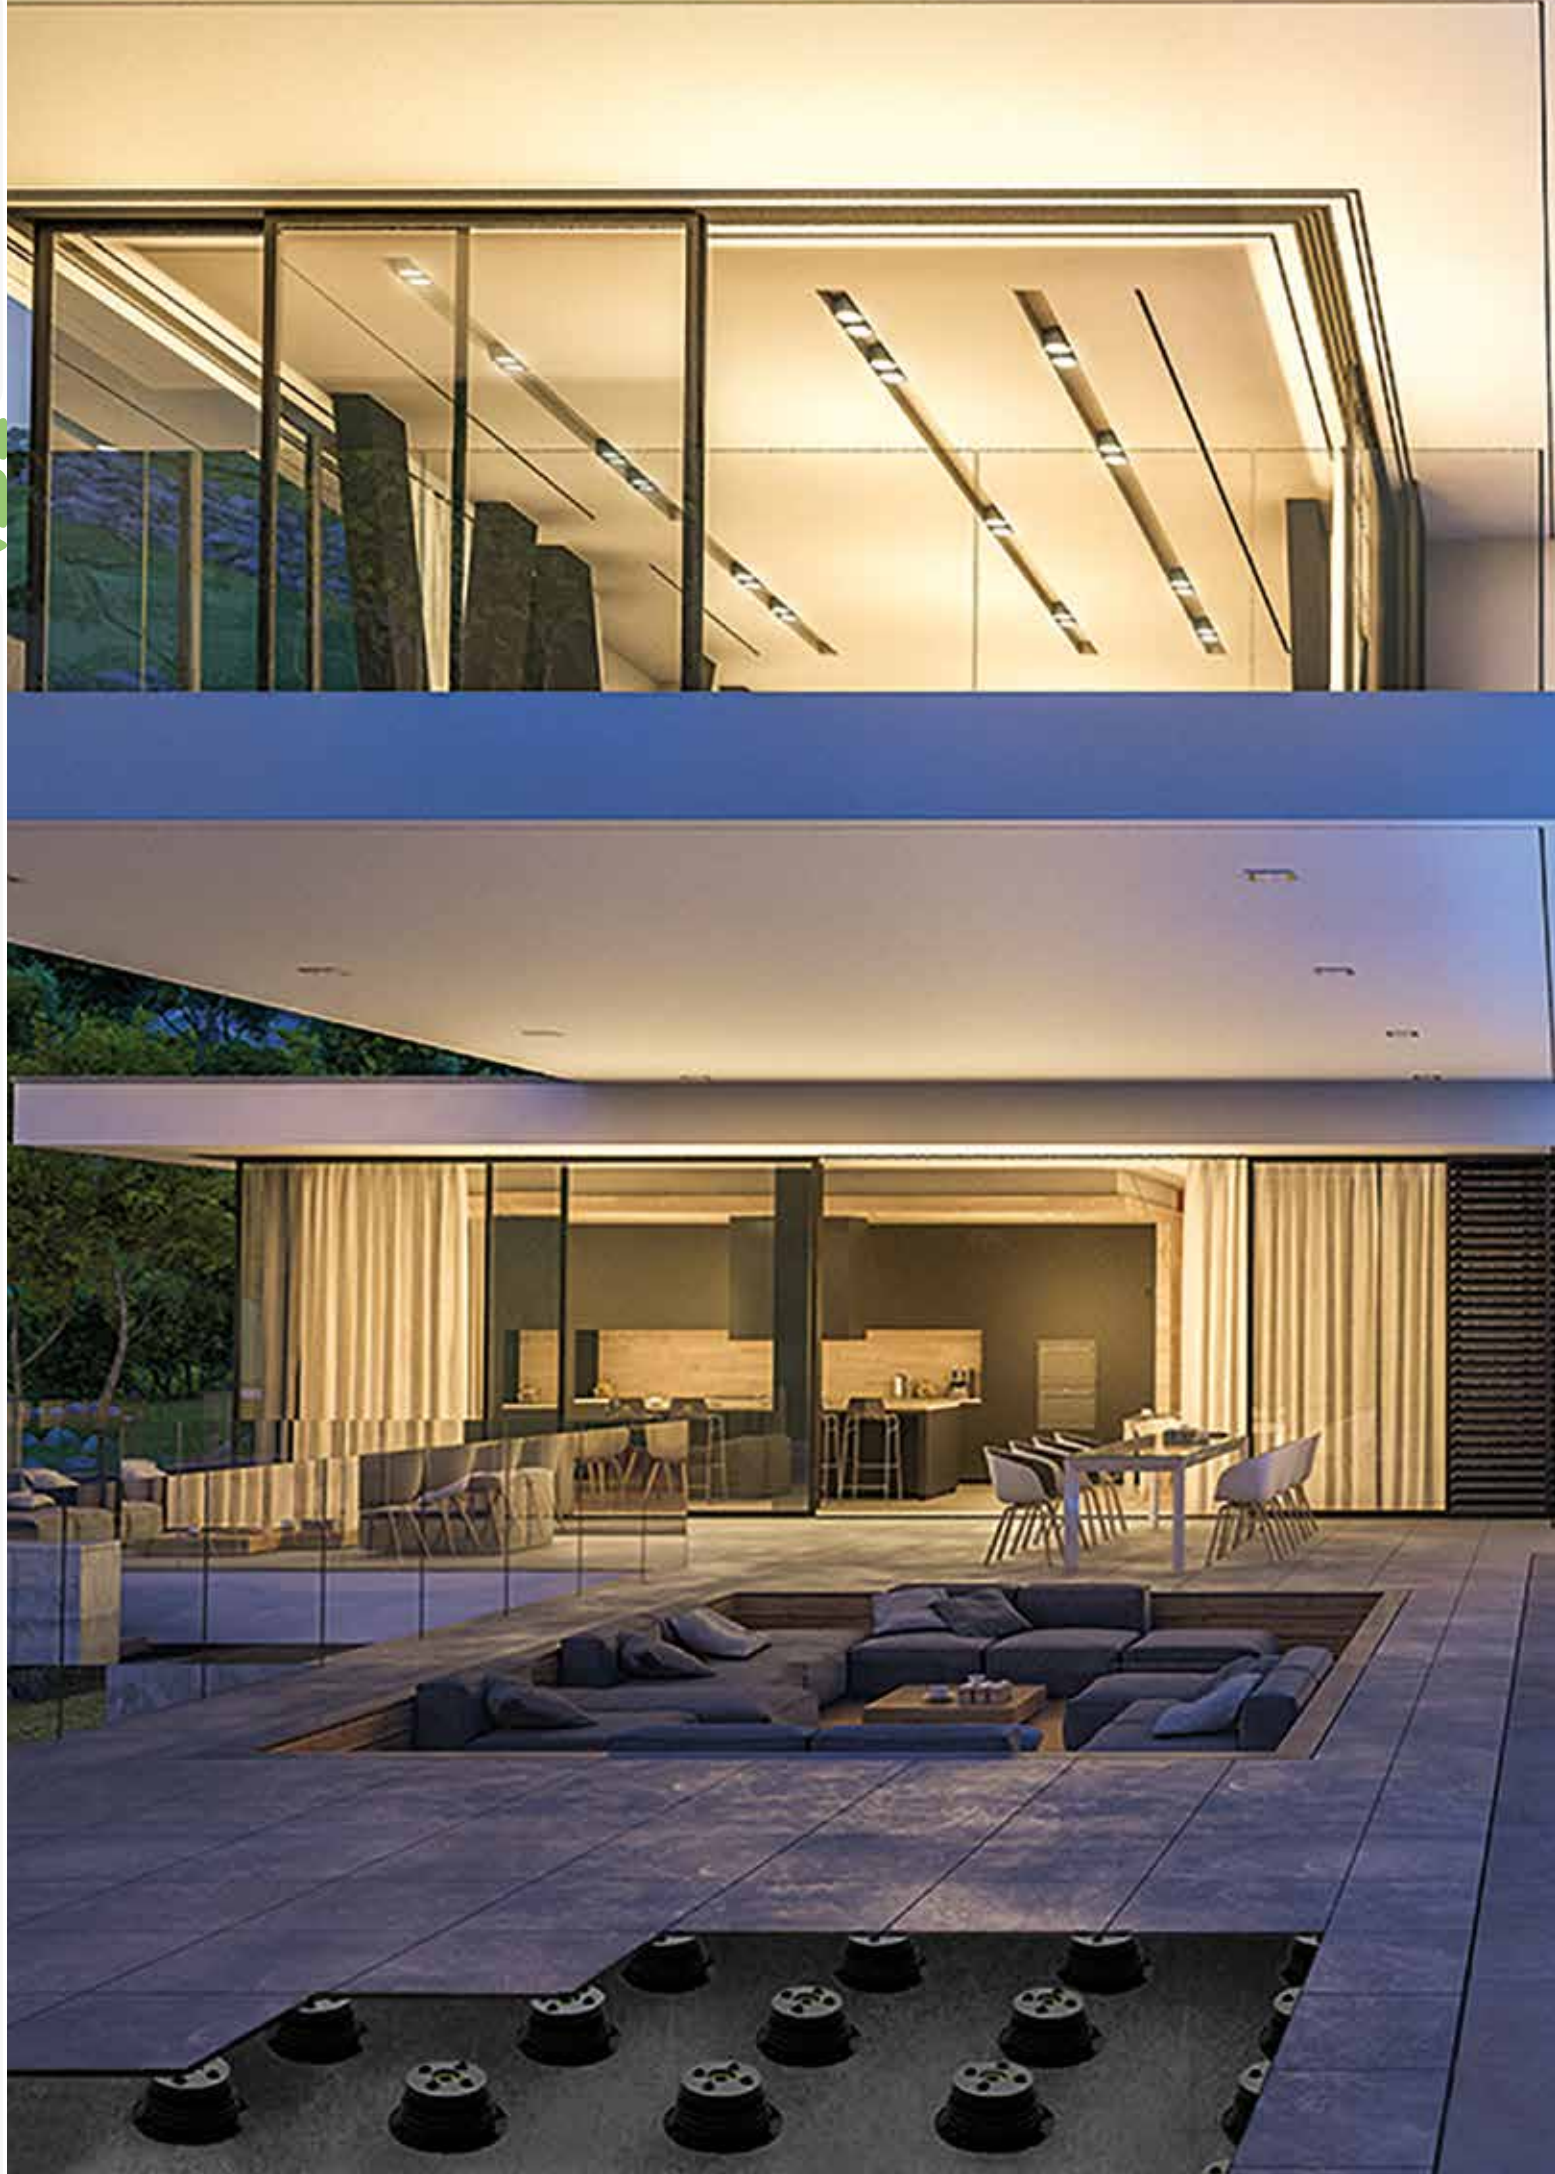



up+tec®

Pedestals for raised floors with an integrated switch from self-leveling to fixed head.

up+tec® FX

Fixed head pedestals for raised floors.



Pedestal system for raised floors

The installation of a raised floor offers benefits beyond mere aesthetic function.



Easy to install and remove, can be easily replaced when needed, and adapts to the specifics of the ground.



It requires no drying time before being accessible. Once installation is complete, the flooring can be used immediately.



Some base surfaces are perfectly leveled, while others have irregularities, such as slopes or small elevation differences. The use of a raised floor system makes it possible to overcome these peculiarities and irregularities in the ground, simply by adjusting the height and using the self-levelling function of the supports.



The system is ideal for creating raised floors outdoors such as balconies, gardens, pool edges, porches and public places.



The joints between tiles (or wood decking) allow constant airflow to the floor below, which protects the underlying surface and improves thermal insulation.



Raised floors are ideal for hiding pipes and electrical systems, they promote rainwater runoff because the tiles laid on the supports are not bound by concrete. In this way, during heavy rains, water can flow freely and the risk of water pooling is drastically reduced.



Raised floors completely avoid cracking, as constant exposure to temperature changes in bonded floors create severe stress through structural movements and dilatation created by temperature fluctuations.




It is safe and versatile, capable of bearing very high loads and offering ease of inspection, as the only thing to do is to lift the tiles without having to break them.



Raised floors also provide additional sound insulation from footstep sounds for the floor underneath.


Applications

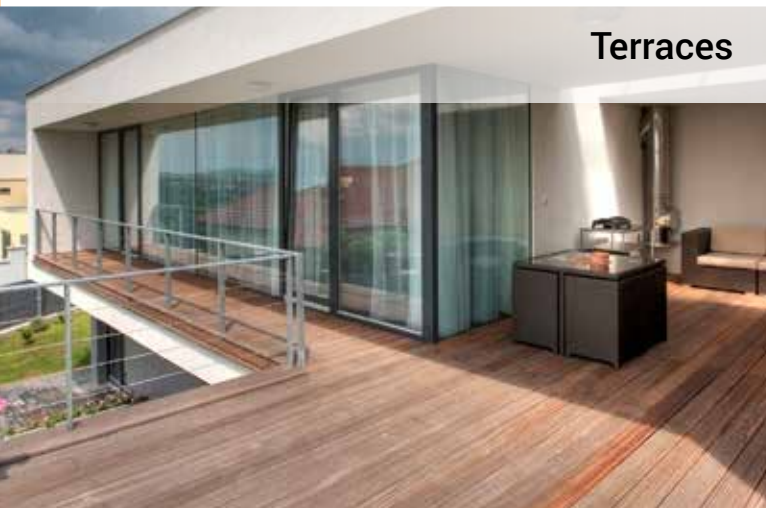

Terraces



Gazebo

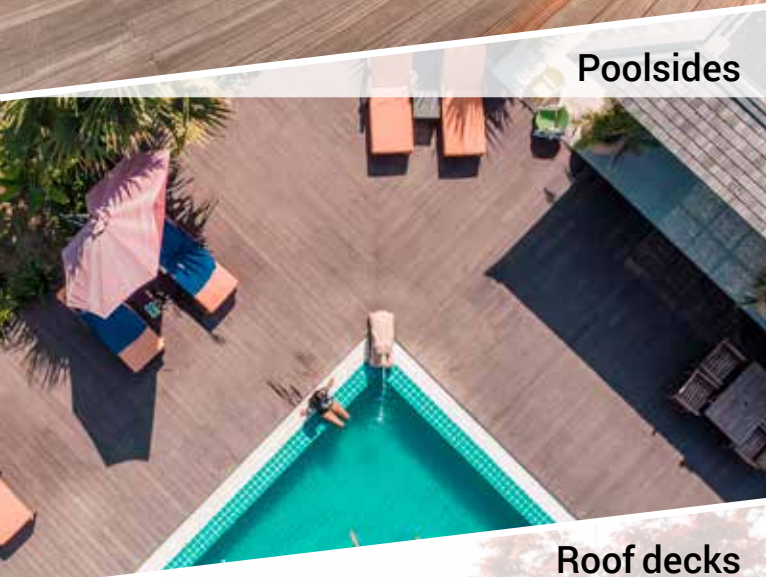

Poolsides



Hot tubs



Roof decks



Gardens



Walkways



Bars and restaurants

3 products, one system

Uptec SUPAL - Reduced Height pedestal



The Uptec SUPAL support is adjustable in height from 28 to 43 mm and can be combined with SUPA2, SUPA4 and SUPAW.

Uptec SUPAS - Standard pedestal

The Uptec SUPAS stand is adjustable in height from 43 to 58 mm and can be combined with SUPA2, SUPA4 and SUPAW; SUPAR extension rings can be used to reach greater heights.

Uptec SUPAR - Extension Ring

Uptec SUPAR is a stackable ring used in combination with the standard SUPAS stand. Each extension ring is 30 mm high.

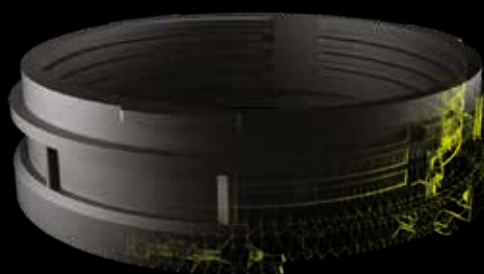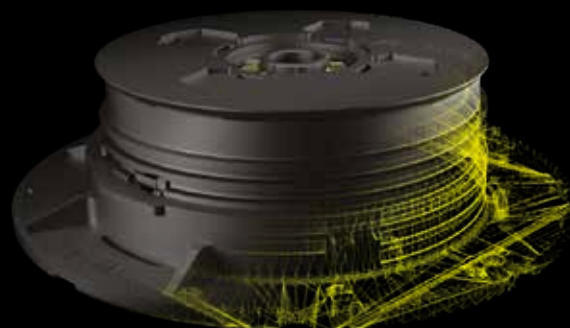

3 accessories for each configuration

Uptec SUPA2 - Head with 2 mm tabs


The Uptec SUPA2 accessory is a two-component head: made of polypropylene for the tab and rubber for the head ensuring anti-noise and non-slip properties (ideal for creating 2 mm joints).

Uptec SUPA4 - Head with 4 mm tabs

The Uptec SUPA4 accessory is a two-component head: made of polypropylene for the tab and rubber for the head ensuring anti-noise and non-slip properties (ideal for creating 4 mm joints).

Uptec SUPAW - Head to be fixed on wooden joists

The SUPAW head is ideal for laying wood decking on wooden joists. Special grooves located along the tab allow quick attachment to the joist with standard screws.

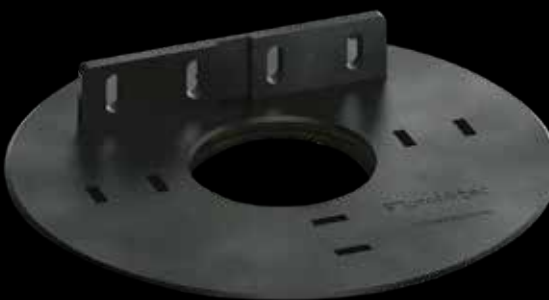

3 products, one system

Uptec SUPALFX - Low pedestal

The Uptec SUPALFX pedestal is adjustable in height from 28 to 43 mm and can be combined with SUPA2FX and SUPA4FX.

Uptec SUPASFX - Standard pedestal

The Uptec SUPASFX pedestal is adjustable in height from 43 to 58 mm and can be combined with SUPA2FX and SUPA4FX; SUPAR extension rings can be used to reach bigger heights.

Uptec SUPAR - Extension Ring

Uptec SUPAR is a stackable ring used in combination with the standard SUPASFX pedestal. Each extension ring is 30 mm high.



2 accessories for every configuration

Uptec SUPA2FX - Head with 2 mm tabs

The Uptec SUPA2FX accessory, is a bi-component head: made of polypropylene for the tabs and rubber for the head, it provides anti-noise and anti-slip performance (ideal for the creation of 2 mm joints).

Uptec SUPA4FX - Head with 4 mm tabs

The Uptec SUPA4FX accessory, is a bi-component head: made of polypropylene for the tabs and rubber for the head, it provides anti-noise and anti-slip performance (ideal for the creation of 4 mm joints).



Advantages of the Uptec system



Due to its modularity the uptec pedestal makes the installation of the raised floor simple, easy and extremely fast, as any height can be reached with only 3 components.



The 3-in-1 system reduces the warehouse space and makes it easier to manage.



Uptec is designed to make work easier and overcome all the obstacles that can be encountered on the construction site, avoiding delays and product reorders for customers.




Ground irregularities and slopes of up to 5 percent will be compensated for with the uptec self-levelling head. (Only valid for uptec)



The uptec system covers all height ranges from 10 mm.


Unexpected height variations will be solved by adding/ removing the SUPAR stackable ring.




The two-component head offers a choice of joint width with removable 2 mm or 4 mm tabs, and provides high anti-noise and anti-slip performance.




The SUPAK adjustment key is the perfect solution for precise height adjustments, during and especially after installation, without having to remove every laid tile.



Pre-cut lines on the base ensure precise placement of the pedestal in corners and along perimeters.



There are 3 kinds of perimeter profiles available with a wide range of colors that meet all aesthetic expectations to stylishly finish the edges of the installation.



up+tec[®] GROUND



Uptec ground is a series of pedestals used for reduced height raised floors



SUPT / SUPT4 - Reduced height pedestal

Uptec ground is the adjustable pedestal ideal for lowest heights, starting from 10 mm up to 15 mm in height, which can be increased by using the SUPB extension. It's available with 2 mm (SUPT) and 4 mm (SUPT4) tabs.


The system is manually adjustable and does not require the use of an adjustment key.

SUPB - Extension for SUPT/SUPT4 pedestals

Uptec ground SUPB is the extension of the SUPT minimum height support. With this stackable accessory, SUPT can increase the height from 15 to 30 mm. Each SUPB extension increases the height by 5 mm.



SUPT & SUPT4




Height adjustment with 0.5 mm precision.




The desired height is clearly visible in mm.

SUPB



To increase the height of SUPT/SUPT4 by 5 mm at a time.




Stackable extensions to reach greater heights.



Accessories

SUPACLPP - PERIMETER SPACER

The SUPACLPP perimeter clip is applied to the head of the pedestals that stand on the perimeter of the installation.



SUPACLPB & SUPACLPT

The SUPACLPB clip will be placed under the pedestal. The SUPACLPT clip will be positioned above the pedestal.

SUPACLPT and SUPACLPB are used to make tile-enclosed perimeters.

SUPAR120

Uptec SUPAR120 is a stackable ring used in combination with the standard SUPAS stand. SUPAR120 increases the height by 120 mm and can be used individually or with the SUPAR ring.



SUPATG

SUPATG is a non-slip, noise-reducing rubber mat that can be placed under Uptec supports to protect the floor underneath.



SUPAK - 3 FUNCTION ADJUSTMENT KEY

Uptec SUPAK is the adjustment key that has three functions:

1. Transition from fixed head to self-levelling .
2. Removal of the fin spacers .
3. Height adjustment



SUPL2 & SUPL3

Leveling discs and noise reducers for Uptec pedestals.



Aluminum joist installation system

The combination options for laying patterns and flooring formats is notably increased.

Lightweight but rigid profiles that are easy to cut, easy to handle, easy to work with and provide an optimal result in terms of solidity and stability of the structure.

Weather resistant and durable over time. They provide exceptional longevity even in very humid environments.

Unaffected by mold growth and the action of a variety of insects.

Precise extrusion processes ensure the planarity and smoothness of profiles, simplifying the installation of raised floors on pedestals.

It offers the chance to use all the appropriate clips and screws or fixtures for a complete installation.

Aluminum joist is a 100% recyclable product, therefore limiting its impact on the environment.

Advantages of SUPAANG240 aluminum joist

SUPAANG240 offers maximum freedom and flexibility in terms of tile sizes to be used and allows for floors with different laying options and various covering materials.







SUPAANG240 ensures maximum resistance for a solid, safe and quick installation.

Openings on the base ensure proper water outflow.

Openings on the base allow the height of the pedestals to be adjusted with the SUPAK key during and after installation.

SUPAANG240 comes with the anti-noise rubber bands already installed to save installers valuable time during installation.

Openings on the base ensure safe and stable attachment to the pedestal head.

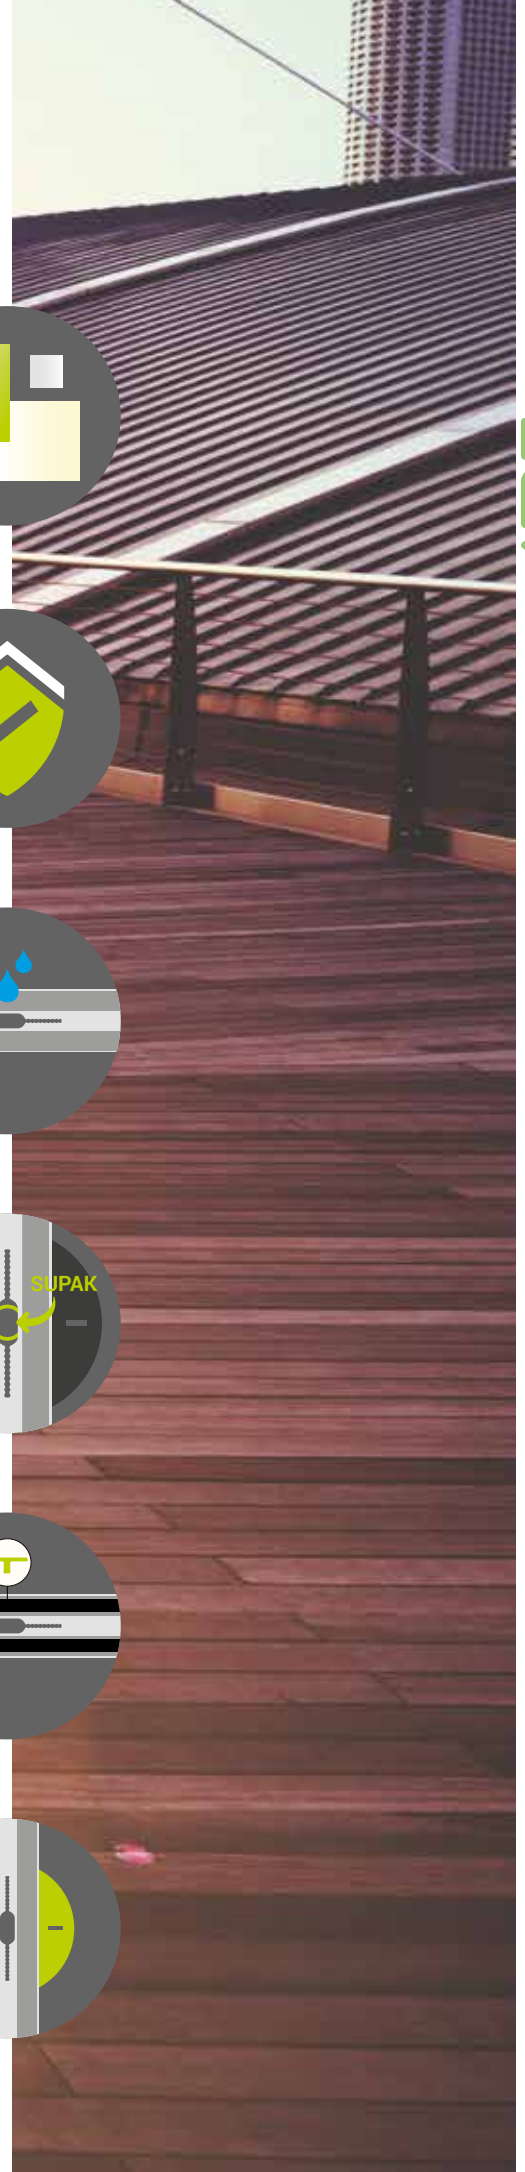



SUPAANG240 uptec accessories



SUPDG

Used in aluminum joist installations, SUPDG2 and SUPDG spacers allow 2 mm and 4 mm joints to be created.



SUPAJG

Polypropylene joint designed to connect SUPAANG aluminum joists.



SUPCLIPG

Locking clips for wood decking installation on outdoor aluminum joists.



SUPACLPPT

The SUPACLPPT perimeter clip delimits the perimeter of the installation on the SUPAANG240 joists.

EPD Certification

Uptec is EPD certified. In building assessments, building products are evaluated through environmental product declarations (EPDs) conducted in accordance with ISO 14025 and EN 15804:2012+A2:2019.

The analysis evaluates the life cycle of the Uptec system and measures it in terms of carbon footprint with independent third-party verification of the statement and data, according to ISO 14025:2006. A series of case studies have shown that Uptec has an improvement of more than 70 percent in terms of carbon footprint over traditional methods of exterior floor assembly, such as glued tiles on a lightweight screed.




EPD

CERTIFICATION

SUPATRAY

Uptec SUPATRAY, the pinnacle of innovation in raised floor solutions, meticulously engineered to surpass all expectations. It is designed to provide unparalleled versatility and durability, setting a new standard in safety and performance. SUPATRAY features a honeycomb structure, designed to offer a robust substructure that not only safeguards against injuries in the event of tile breakage but also ensures exceptional stability. With dimensions measuring 598 x 598 x 38 mm, SUPATRAY creates a solid foundation for any raised floor project. Made with recycled ABS plastic material, SUPATRAY withstands the test of time and the most challenging weather conditions. In addition, four galvanized steel reinforcement profiles are strategically placed on all sides of the SUPATRAY enhancing its load-bearing capacity and minimizing bending. These reinforcements come pre-assembled, saving precious time and simplifying the installation process. SUPATRAY creative freedom knows no bounds. It guarantees the creation of stable and flush substructure, allowing imagination and creativity for installations including various tile sizes and patterns with ease.

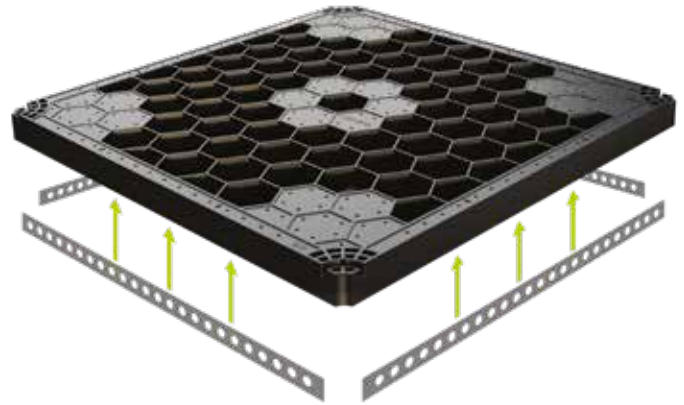

SUPATRAY with four reinforcement profiles pre-mounted




SUPATRAYGRIP2 and SUPATRAYGRIP4
for 2mm 4mm joints



SUPATRAYTAB2 and SUPATRAYTAB4
for 2mm 4mm joints

ABS recycled plastic and
galvanized steel

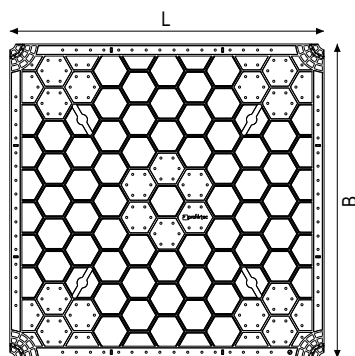

LxB = 598 x 598 mm
Thickness = 38 mm

ACCESSORIES:



**SUPATRAYGRIP2
and SUPATRAYGRIP4**



SUPATRAYTAB2



SUPATRAYTAB4

ADVANTAGES




Ultimate Safety

Protects against injuries in the event of tile breakage




Indestructible Strength

Engineered with four galvanized steel profiles, rendering it highly resistant against structural challenges.



Effortless Installation

Revolutionizes installation with convenient 598 x 598 mm dimensions, drastically reducing time and labor costs.



Perfection in Precision

It creates perfectly level flooring surfaces and offers the possibility for pedestal height adjustment using the SUPAK multifunction key, even with glued tiles.




Limitless Creativity

Unleashes boundless creativity, enabling the creation of multiple installation patterns with various tile sizes.




Tailored Adaptability

Can be easily cut to offer individual customization options for curves, recesses, and small edge sections.



Efficient Drainage

Guarantees drainage efficiency, ensuring rapid water dispersal through joints and its cavities.



Stability Standard

The SUPATRAY grids are securely connected to each other thanks to the SUPATRAYGRIP2 and SUPATRAYGRIP4 aluminium locking discs, which guarantee uniformity and maximum stability.



Sustainability

SUPATRAY incorporates recycled content and embraces full recyclability.

Anti wind uplift system

The SUPATRAY anti wind uplift system includes a plastic tray featuring three adhesive tracks (perimeter, center, and auxiliary sections), Profilitec adhesive FIXXTEC and the locking disc SUPALOCK.

The assembly process is straightforward. Starting with bonding the porcelain pavers onto the SUPATRAY using FIXXTEC adhesive applied to the tracks. Next, the pedestals are positioned and leveled prior to placing the assembled SUPATRAY atop them. To ensure a level and secure surface, all four corners of the trays are firmly connected using the SUPALOCK disc, subsequently locked in using the SUPAK key.



Invisible

Featuring a hidden lock down system which allows the surface to maintain its original flush aesthetic.



Removable

The system allows for easy inspection of the underlying surface, facilitating maintenance and replacement of tiles if needed.



Fast and safe

Assembly is a straightforward process, eliminating the need to kerf the pavers' sides, preserving their integrity and saving precious time during installation.



Dual function

SUPATRAY acts as wind uplift system and guarantees an anti fragmentation hazard in case of tile breakage.

SUPALOCK

TILE

SUPATRAY

FIXXTEC

UPTEC PEDESTAL

Please contact a Profilitec sales representative for more details.

SUPALOCK

The SUPALOCK Aluminum Locking Disc offers a seamless and secure solution for connecting SUPATRAYS in raised floor systems installed over Uptec pedestals. Engineered from high-quality aluminum, it is built to withstand extreme wind conditions up to 225km/h. The integrated pins securely fit into the openings on the locking disc, further enhancing its strength and stability.

FIXXTEC

FIXXTEC is a multi-purpose adhesive formulated to bond and seal various construction materials. When applied to the adhesive tracks on SUPATRAY, FIXXTEC creates a strong bond between the pavers and trays, ensuring enhanced wind uplift resistance.

SUPAA24240

SUPAA24240 powder-coated aluminum profile is to be installed along the walls and parapet of the raised floor to further increase its uplift resistance. These robust L-shaped profiles hold the pavers firmly in place and enhance the overall aesthetic harmony of the installation.

FIXXTEC

FIXXTEC is a multipurpose adhesive suitable for sealing and waterproofing the joints of FOILTEC membranes. It is also suitable for bonding a wide range of products, such as baseboards, expansion and connection joints, hygienic coves, transition profiles, etc...

FIXXTEC can be applied to both wet and underwater surfaces, acting as a waterproofing adhesive and sealant.

FIXXTEC is the perfect solution for bonding porcelain pavers onto the SUPATRAY.



FIXXTEC


MS polymer

White


fixxtec >> Multipurpose waterproof adhesive sealant			
Cod.	Description	€ / pc	pc/pck
FIXXTEC/OUT	MULTIPURPOSE WATERPROOF ADHESIVE SEALANT 290ML	22,45	12

pck = indivisible packaging




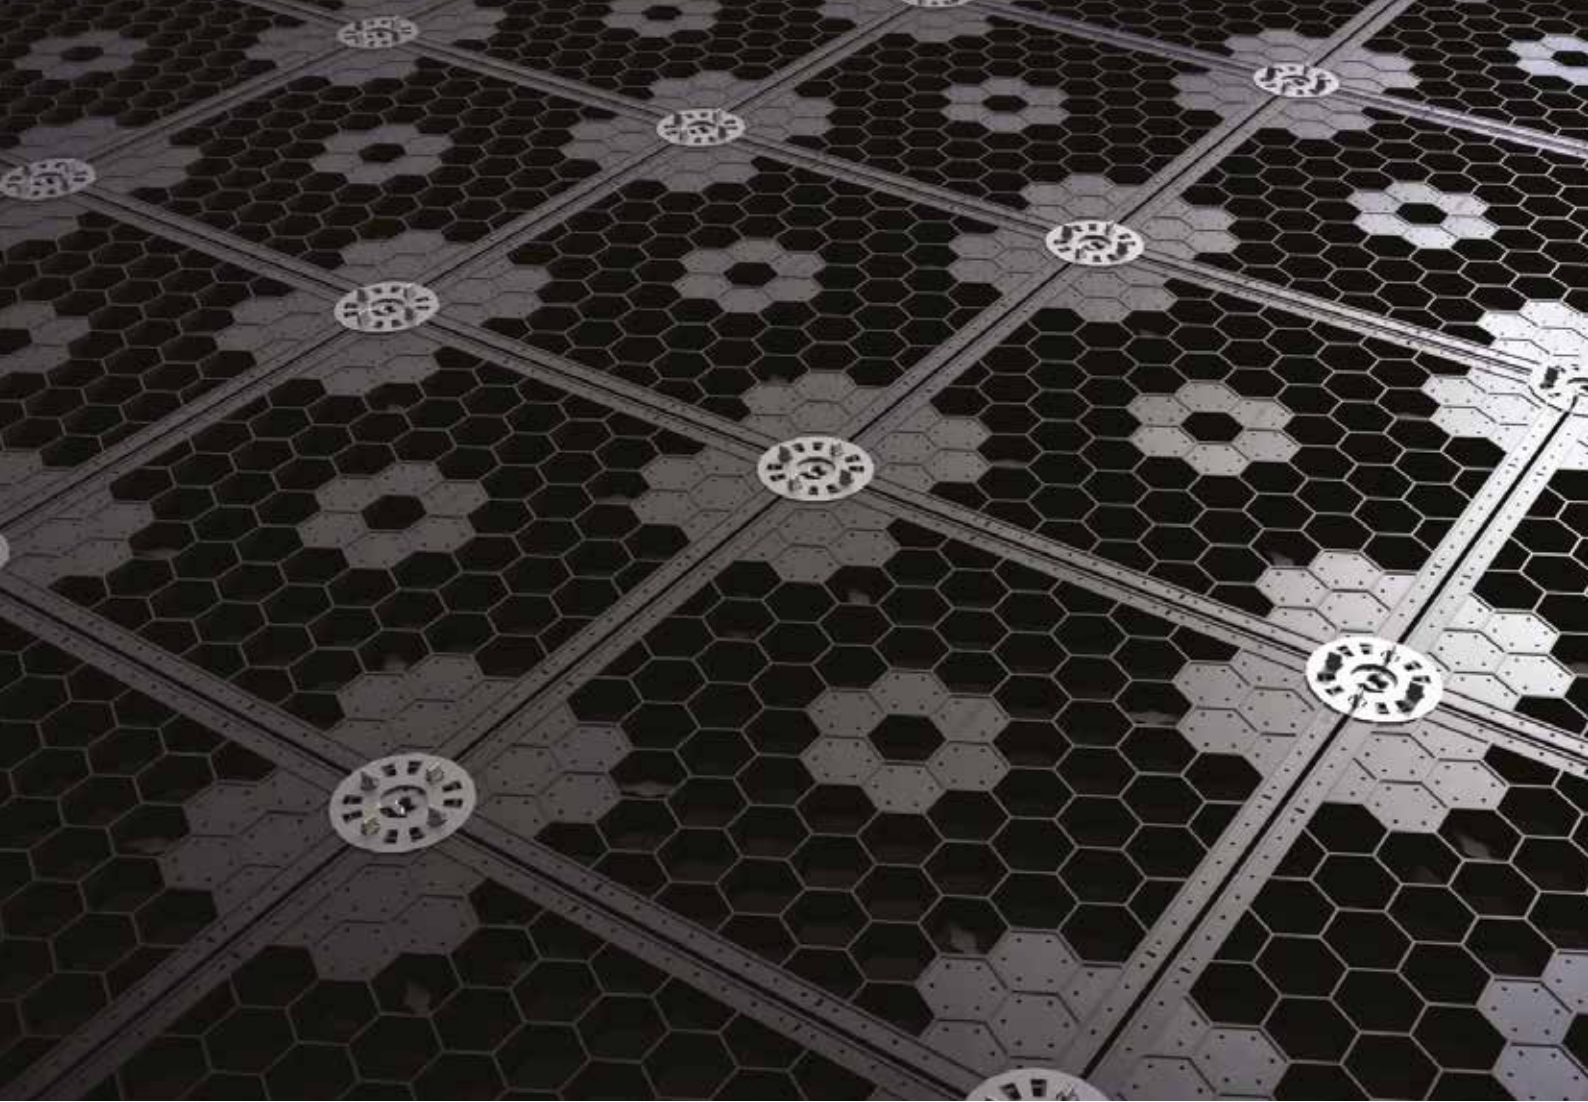


Laying patterns




40x40 cm




50x50 cm




60x60 cm




80x80 cm




90x90 cm




40x80 cm




45x90 cm




30x60 cm




60x90 cm




40x120 cm



20x120 cm



30x120 cm



60x120 cm

Usage of the supports at m²

TILE SIZE	20	30	40	45	50	60	70	75	80	90	100
20	25,00	16,67	12,50	11,11	10,00	8,33	14,29	13,33	12,50	11,11	10,00
30	16,67	11,11	8,33	7,41	6,67	5,56	9,52	8,89	8,33	7,41	6,67
40	12,50	8,33	6,50	5,56	5,00	4,17	7,14	6,67	6,65	5,56	5,00
45	11,10	7,41	5,56	4,94	4,44	3,70	6,35	5,63	5,56	4,94	4,44
50	10,00	6,67	5,00	4,44	4,00	3,33	5,71	5,33	5,00	4,44	4,00
60	8,30	5,56	4,17	3,70	3,33	2,78	4,76	4,44	4,17	3,70	3,33
70	14,29	9,52	7,14	6,35	5,71	4,76	4,08	3,81	3,57	3,17	2,86
75	13,33	8,89	6,67	5,93	5,33	4,44	3,81	3,56	3,33	2,96	2,67
80	12,50	8,33	6,25	5,56	5,00	4,17	3,57	3,33	6,25	5,59	5,00
90	11,11	7,41	5,56	4,94	4,44	3,70	3,17	2,96	5,56	4,94	4,44
100	10,00	6,67	5,00	4,44	4,00	3,33	2,86	2,67	5,00	4,44	4,00
120	8,33	5,56	4,17	3,70	3,33	2,78	2,38	2,22	4,17	3,7	3,33
140	14,29	9,52	7,14	6,35	5,71	4,76	2,04	1,90	3,57	3,17	2,86
160	12,50	8,33	6,25	5,56	5,00	4,17	3,57	3,33	6,25	5,56	5,00
180	8,33	5,56	4,17	3,70	3,33	2,78	2,38	2,22	4,17	3,70	3,33

The table provides a purely mathematical estimate of consumption without taking into account all site variables. It is recommended that the values given be increased by 5-15%. Please contact customer service for more accurate information.



uptec[®]

CALCULATOR

www.profilitec.com/uptec-configurator


Uptec pedestal calculator is an online tool to create your own raised floor and calculate the number of supports required for the project




You can design the area or upload an architectural sketch, choose from an extensive list of tile sizes, select the width of the joints, and set the desired height of the pavement.



You can choose between a classic installation on pedestals or an installation with aluminum joists in which all the needed accessories for a complete installation are included.

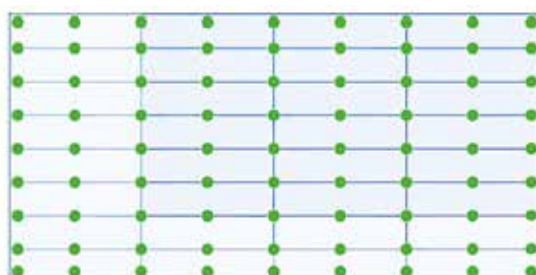

The uptec media calculator automatically determines which and how many pedestals/ accessories are required for the project. It is an easy and intuitive tool that offers a wide range of functions to facilitate your work.

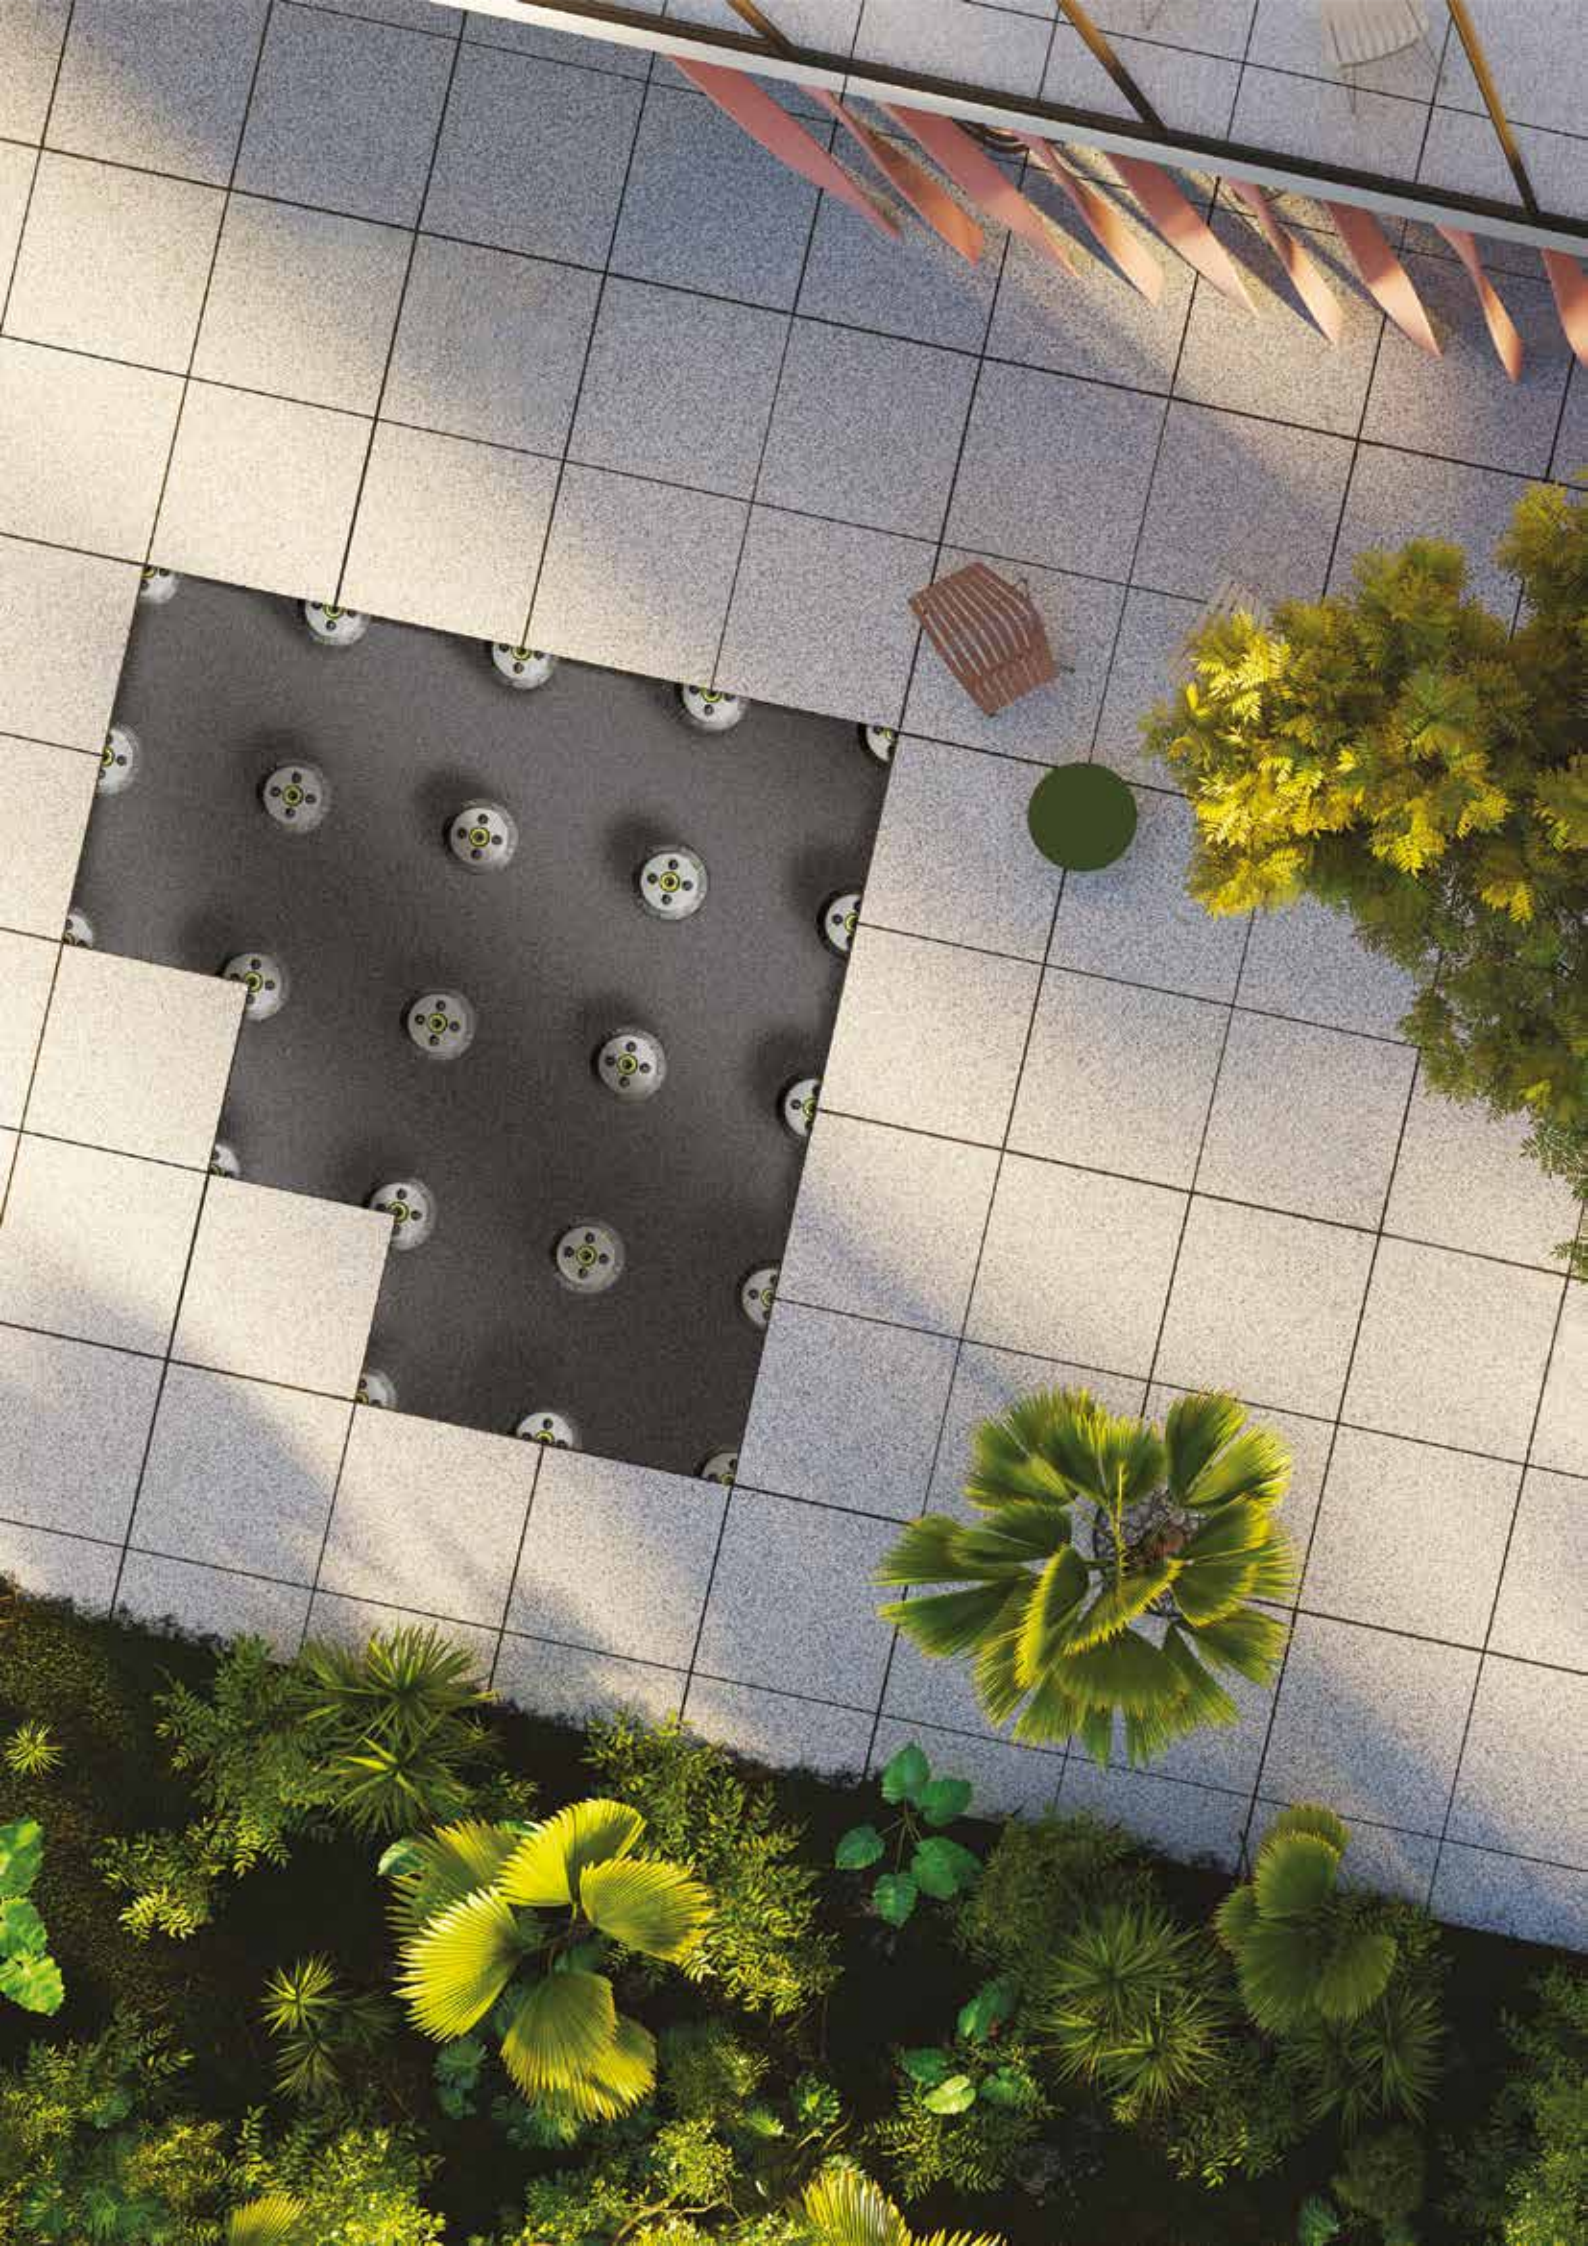

uptec							
Cod.	H1 mm	Description		pc / pck		pcs / pallet	
SUPAL	28 ... 43	LOW PEDESTAL		24		1'296	
SUPAS	43 ... 58	STANDARD PEDESTAL		24		864	
SUPAR	30	EXTENSION RING FOR PEDESTALS		24		1'440	
SUPAR120	120	BIG EXTENSION RING FOR PEDESTALS		24		480	

uptec >> Heads for pedestals							
Cod.	Description		pc / pck		pcs / pallet		
SUPA2SET24	KIT 24PCS HEAD FOR 2MM JOINTS		24		4'320		
SUPA4SET24	KIT 24PCS HEAD FOR 4MM JOINTS		24		4'320		
SUPAWSET24	KIT 24PCS HEAD FOR WOODEN JOIST		24		4'320		
SUPA2	HEAD FOR 2MM JOINTS		240		4'320		
SUPA4	HEAD FOR 4MM JOINTS		240		4'320		
SUPAW	HEAD FOR WOODEN JOIST		240		4'320		

uptec >> Accessories							
Cod.	Description		pc / pck				
SUPAK	3 FUNCTIONS KEY		1				
SUPL2	RUBBER LEVELING DISK 2MM		600				
SUPL3	RUBBER LEVELING DISK 3MM		500				
Cod.	Description		pcs / set				
SUPATG	RUBBER MAT 198X198		24				
SUPACLPBSET5	CLIP FOR VERTICAL EDGE - BASE		5				
SUPACLPSET5	CLIP FOR VERTICAL EDGE - HEAD		5				
SUPACLPSET5	PERIMETER SPACER		5				

28-43 mm	43-58 mm	58-88 mm	88-118 mm	118-148 mm	148-178 mm
SUPAL	SUPAS	SUPAS + 1 SUPAR	SUPAS + 2 SUPAR	SUPAS + 3 SUPAR	SUPAS + 1 SUPAR120

Sample prices of individual supports including head

Pedestals	Height (mm)	
SUPAL + SUPA4	28 - 43	
SUPAS + SUPA4	43 - 58	
SUPAS + 1 SUPAR + SUPA4	58 - 88	
SUPAS + 2 SUPAR + SUPA4	88 - 118	
SUPAS + 3 SUPAR + SUPA4	118 - 148	
SUPAS + 1 SUPAR120 + SUPA4	148 - 178	
SUPAS + 1 SUPAR120 + 1 SUPAR + SUPA4	178 - 208	
SUPAS + 1 SUPAR120 + 2 SUPAR + SUPA4	208 - 238	

pck = indivisible packaging

uptec FX							
Cod.	H1 mm	Description		pc / pck		pcs / pallet	
SUPALFX	28... 43	LOW FIXED-HEAD PEDESTAL		24		1'296	
SUPASFX	43... 58	STANDARD FIXED-HEAD PEDESTAL		24		864	
SUPAR	30	EXTENSION RING FOR PEDESTALS		24		1'440	
SUPAR120	120	BIG EXTENSION RING FOR PEDESTALS		24		480	

uptec FX >> Heads for pedestals							
Cod.	Description		pc / pck		pcs / pallet		
SUPA2FXSET24	UPTEC FX HEAD FOR 2MM JOINTS		24		4'320		
SUPA4FXSET24	UPTEC FX HEAD FOR 4MM JOINTS		24		4'320		
SUPA2FX	UPTEC FX HEAD FOR 2MM JOINTS		240		4'320		
SUPA4FX	UPTEC FX HEAD FOR 4MM JOINTS		240		4'320		

uptec >> Accessories							
Cod.	Description		pc / pck		pcs / set		
SUPAK	3 FUNCTIONS KEY		1				
SUPL2	RUBBER LEVELING DISK 2MM		600				
SUPL3	RUBBER LEVELING DISK 3MM		500				
Cod.	Description		pc / pck		pcs / set		
SUPATG	RUBBER MAT 198X198		24				
SUPACLPBSET5	CLIP FOR VERTICAL EDGE - BASE		5				
SUPACLPTSET5	CLIP FOR VERTICAL EDGE - HEAD		5				
SUPACLPSET5	PERIMETER SPACER		5				

28-43 mm	43-58 mm	58-88 mm	88-118 mm	118-148 mm	148-178 mm
SUPALFX	SUPASFX	SUPASFX + 1 SUPAR	SUPASFX + 2 SUPAR	SUPASFX + 3 SUPAR	SUPASFX + 1 SUPAR120

Sample prices of individual supports including head


Pedestals	Height (mm)	
SUPALFX + SUPA4FX	28 - 43	
SUPASFX + SUPA4FX	43 - 58	
SUPASFX + 1 SUPAR + SUPA4FX	58 - 88	
SUPASFX + 2 SUPAR + SUPA4FX	88 - 118	
SUPASFX + 3 SUPAR + SUPA4FX	118 - 148	
SUPASFX + 1 SUPAR120 + SUPA4FX	148 - 178	
SUPASFX + 1 SUPAR120 + 1 SUPAR + SUPA4FX	178 - 208	
SUPASFX + 1 SUPAR120 + 2 SUPAR + SUPA4FX	208 - 238	

pck = indivisible packaging

ALUMINUM JOIST UPTEC

uptec >> Aluminum joist							
Cod.	HxB mm	Description		pc / pck		pcs / pallet	
SUPAANG240	27,5x63,6	JOIST WITH RUBBER IN NATURAL ALUMINUM 2,4M		5**		360	
SUPAANGB240	27,5x63,6	JOIST WITH RUBBER IN BLACK ANODIZED ALUMINUM 2,4M		5**		360	

uptec >> Joist accessories							
Cod.	Description		pc / pck				
SUPDG	SPACER FOR ALUMINUM JOIST 4MM		500				
SUPDG2	SPACER FOR ALUMINUM JOIST 2MM		500				
Cod.	Description		pcs / set				
SUPCLIPG	LATERAL AND CENTRAL CLIP - 1PCK = 50PCS + 25 SCREWS		50				
SUPACLPPTSET5	PERIMETER SPACER FOR JOIST		5				
SUPAJGSET20	JOIST JOINT		20				

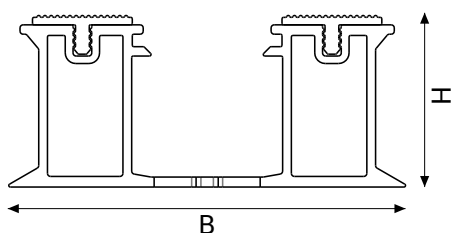

To be use with 4 mm tabs
Length: 2,40 meters

uptec ground

support >> SUPT Adjustable support							
Cod.	H1 mm	Description		pc / pck			
SUPT	10 ... 15	SUPPORT H8-15MM 2MM TABS		50			
SUPT4	10 ... 15	SUPPORT H8-15MM 4MM TABS		50			

support >> SUPB - SUPT extension							
Cod.	H1 mm	Description		pc / pck			
SUPB	5	EXTENSION FOR SUPPORT H5MM		50			

SUPATRAY

uptec SUPATRAY >> Anti-fragmentation tray							
Cod.	LxB mm	Description		pc / pck		pcs / pallet	
SUPATRAY	598x598	ANTI-FRAGMENTATION TRAY UPTEC		56		56	

uptec SUPATRAY >> Anti-fragmentation tray set							
Cod.	LxB mm	Description		pc / pck		pcs / pallet	
SUPATRAYSET4	598x598	ANTI-FRAGMENTATION TRAY SET UPTEC		4		56	

uptec SUPATRAYGRIP and SUPALOCK >> Locking elements for anti-fragmentation tray							
Cod.	Description		pc / pck				
SUPATRAYGRIP2SET24	ALU. LOCKING ACCESSORY 2MM SUPATRAY 1CF=24PCS		24				
SUPATRAYGRIP4SET24	ALU. LOCKING ACCESSORY 4MM SUPATRAY 1CF=24PCS		24				
SUPALOCKSET24	ALUMINUM LOCKING DISK SET FOR SUPATRAY		24				
SUPATRAYGRIP2	ALU. LOCKING ACCESSORY 2MM SUPATRAY 1CF=240PCS		240				
SUPATRAYGRIP4	ALU. LOCKING ACCESSORY 4MM SUPATRAY 1CF=240PCS		240				
SUPALOCK	ALUMINUM LOCKING DISK FOR SUPATRAY		240				

uptec SUPATRAYTAB >> spacers for anti-fragmentation tray							
Cod.	Description		pc / pck				
SUPATRAYTAB2SET24	SPACER 2MM SET SUPATRAY		24				
SUPATRAYTAB4SET24	SPACER 4MM SET SUPATRAY		24				
SUPATRAYTAB2	SPACER 2MM SUPATRAY		240				
SUPATRAYTAB4	SPACER 4MM SUPATRAY		240				

uptec SUPAA24240 >> "L" shaped profile for anti wind-uplift system							
Cod.	Description		pc / pck				
SUPAA24240	PARAPET FOR ANTIWIND UPLIFT SYSTEM		5**				

pck = indivisible packaging

* 10% increase for quantities lower than 20.

** 10% increase for quantities lower than those indicated.

support 80

Polypropylene supports for laying of floating tiles and floor coverings. Good resistance to ice and atmospheric agents. It is an easy to use system that can adjust the covering to different heights thanks to the available shims. Ideal for large balconies, terraces, verandas walkways and roof gardens. Placed directly onto the sloping bituminous waterproofing layer they provide an effective drainage system and ensure maintenance of the waterproofing layer over time.




support 8010/set

Plastic support for floating floors



support 8020/set

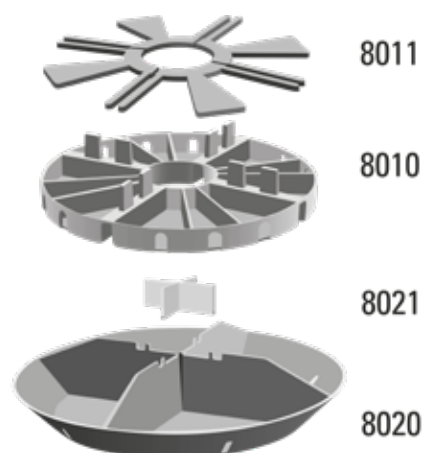

Pedestals

Plastic support » for floating stone tiles					
Cod.	H1 mm	Finish		pcs / set	
8011/SET	3	-		100	
8010/SET	13	-		250	

Plastic support » for floating stone tiles					
Cod.	H1 mm	Finish		pcs / set	
8021/SET	3	-		200	
8020/SET	20	-		50	

pck = indivisible packaging


bordertec BSR

The BORDERTEC BSR is recommended to contour marble and stone balconies and terraces with to water-run-off finishing element. Its reversible section allows to match two different tiles' thicknesses with the same reversible profile. Bordertec BSR is equipped with the necessary special pieces for a proper installation.




BSR20/160A24


Length: 2,70 meters



Aluminum
B = 3,6 mm




Aluminum



bordertec >> BSR Terminal profile in Powder Coated Aluminum				
Cod.	HxH1 mm	Finish		pcs
BSR20/40A22270	20x40	A22 - Pastel Grey		10**
BSR20/60A22270	20x60	A22 - Pastel Grey		10**
BSR20/80A22270	20x80	A22 - Pastel Grey		5**
BSR20/100A22270	20x100	A22 - Pastel Grey		5**
BSR20/120A22270	20x120	A22 - Pastel Grey		5**
BSR20/140A22270	20x140	A22 - Pastel Grey		5**
BSR20/160A22270	20x160	A22 - Pastel Grey		5**

bordertec >> BSRE External corner in Powder Coated Aluminum				
Cod.	HxH1 mm	Finish		pcs
BSRE20/40A22	20x40	A22 - Pastel Grey		10**
BSRE20/60A22	20x60	A22 - Pastel Grey		10**
BSRE20/80A22	20x80	A22 - Pastel Grey		10**
BSRE20/100A22	20x100	A22 - Pastel Grey		10**
BSRE20/120A22	20x120	A22 - Pastel Grey		10**
BSRE20/140A22	20x140	A22 - Pastel Grey		10**
BSRE20/160A22	20x160	A22 - Pastel Grey		10**

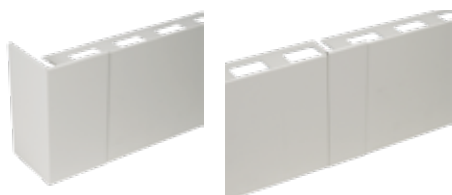

BSRE20/160A24

BSRG20/160A24

bordertec >> BSRG Joint in Powder Coated Aluminum				
Cod.	HxH1 mm	Finish		pcs
BSRG20/40A22	20x40	A22 - Pastel Grey		10**
BSRG20/60A22	20x60	A22 - Pastel Grey		10**
BSRG20/80A22	20x80	A22 - Pastel Grey		10**
BSRG20/100A22	20x100	A22 - Pastel Grey		10**
BSRG20/120A22	20x120	A22 - Pastel Grey		10**
BSRG20/140A22	20x140	A22 - Pastel Grey		10**
BSRG20/160A22	20x160	A22 - Pastel Grey		10**

* 10% increase for quantities lower than 20.

** 10% increase for quantities lower than those indicated.

Aluminum



bordertec >> BSR in Powder Coated Aluminum Modern Line				
Cod.	HxH1 mm	Finish		pcs
BSR20/40A24270	20x40	A24 - Embossed pastel grey		10**
BSR20/60A24270	20x60	A24 - Embossed pastel grey		10**
BSR20/80A24270	20x80	A24 - Embossed pastel grey		5**
BSR20/100A24270	20x100	A24 - Embossed pastel grey		5**
BSR20/120A24270	20x120	A24 - Embossed pastel grey		5**
BSR20/140A24270	20x140	A24 - Embossed pastel grey		5**
BSR20/160A24270	20x160	A24 - Embossed pastel grey		5**
BSR20/40A33270	20x40	A33 - Embossed Dove-Grey		10**
BSR20/60A33270	20x60	A33 - Embossed Dove-Grey		10**
BSR20/80A33270	20x80	A33 - Embossed Dove-Grey		5**
BSR20/100A33270	20x100	A33 - Embossed Dove-Grey		5**
BSR20/120A33270	20x120	A33 - Embossed Dove-Grey		5**
BSR20/140A33270	20x140	A33 - Embossed Dove-Grey		5**
BSR20/160A33270	20x160	A33 - Embossed Dove-Grey		5**
BSR20/40A50270	20x40	A50 - Embossed Micaceous		10**
BSR20/60A50270	20x60	A50 - Embossed Micaceous		10**
BSR20/80A50270	20x80	A50 - Embossed Micaceous		5**
BSR20/100A50270	20x100	A50 - Embossed Micaceous		5**
BSR20/120A50270	20x120	A50 - Embossed Micaceous		5**
BSR20/140A50270	20x140	A50 - Embossed Micaceous		5**
BSR20/160A50270	20x160	A50 - Embossed Micaceous		5**
BSR20/40A65270	20x40	A65 - Embossed matt Black		10**
BSR20/60A65270	20x60	A65 - Embossed matt Black		10**
BSR20/80A65270	20x80	A65 - Embossed matt Black		5**
BSR20/100A65270	20x100	A65 - Embossed matt Black		5**
BSR20/120A65270	20x120	A65 - Embossed matt Black		5**
BSR20/140A65270	20x140	A65 - Embossed matt Black		5**
BSR20/160A65270	20x160	A65 - Embossed matt Black		5**

The colors in the Profiltec range, as shown in the final pages of the price list, are available upon request with the following conditions:

- without a surcharge;
- with a delivery time of 5 weeks;
- for a minimum quantity of 100pcs.

bordertec >> BSRE External Junction in Powder Coated Modern Line				
Cod.	HxH1 mm	Finish		pcs
BSRE20/40A24	20x40	A24 - Embossed pastel grey		10**
BSRE20/60A24	20x60	A24 - Embossed pastel grey		10**
BSRE20/80A24	20x80	A24 - Embossed pastel grey		10**
BSRE20/100A24	20x100	A24 - Embossed pastel grey		10**
BSRE20/120A24	20x120	A24 - Embossed pastel grey		10**
BSRE20/140A24	20x140	A24 - Embossed pastel grey		10**
BSRE20/160A24	20x160	A24 - Embossed pastel grey		10**
BSRE20/40A33	20x40	A33 - Embossed Dove-Grey		10**
BSRE20/60A33	20x60	A33 - Embossed Dove-Grey		10**
BSRE20/80A33	20x80	A33 - Embossed Dove-Grey		10**
BSRE20/100A33	20x100	A33 - Embossed Dove-Grey		10**
BSRE20/120A33	20x120	A33 - Embossed Dove-Grey		10**
BSRE20/140A33	20x140	A33 - Embossed Dove-Grey		10**
BSRE20/160A33	20x160	A33 - Embossed Dove-Grey		10**
BSRE20/40A50	20x40	A50 - Embossed Micaceous		10**
BSRE20/60A50	20x60	A50 - Embossed Micaceous		10**
BSRE20/80A50	20x80	A50 - Embossed Micaceous		10**
BSRE20/100A50	20x100	A50 - Embossed Micaceous		10**
BSRE20/120A50	20x120	A50 - Embossed Micaceous		10**
BSRE20/140A50	20x140	A50 - Embossed Micaceous		10**
BSRE20/160A50	20x160	A50 - Embossed Micaceous		10**
BSRE20/40A65	20x40	A65 - Embossed matt Black		10**
BSRE20/60A65	20x60	A65 - Embossed matt Black		10**
BSRE20/80A65	20x80	A65 - Embossed matt Black		10**
BSRE20/100A65	20x100	A65 - Embossed matt Black		10**
BSRE20/120A65	20x120	A65 - Embossed matt Black		10**
BSRE20/140A65	20x140	A65 - Embossed matt Black		10**
BSRE20/160A65	20x160	A65 - Embossed matt Black		10**

bordertec >> BSRG Joint in Powder Coated Aluminum Modern Line				
Cod.	HxH1 mm	Finish		pcs
BSRG20/40A24	20x40	A24 - Embossed pastel grey		10**
BSRG20/60A24	20x60	A24 - Embossed pastel grey		10**
BSRG20/80A24	20x80	A24 - Embossed pastel grey		10**
BSRG20/100A24	20x100	A24 - Embossed pastel grey		10**
BSRG20/120A24	20x120	A24 - Embossed pastel grey		10**
BSRG20/140A24	20x140	A24 - Embossed pastel grey		10**
BSRG20/160A24	20x160	A24 - Embossed pastel grey		10**
BSRG20/40A33	20x40	A33 - Embossed Dove-Grey		10**
BSRG20/60A33	20x60	A33 - Embossed Dove-Grey		10**
BSRG20/80A33	20x80	A33 - Embossed Dove-Grey		10**
BSRG20/100A33	20x100	A33 - Embossed Dove-Grey		10**
BSRG20/120A33	20x120	A33 - Embossed Dove-Grey		10**
BSRG20/140A33	20x140	A33 - Embossed Dove-Grey		10**
BSRG20/160A33	20x160	A33 - Embossed Dove-Grey		10**
BSRG20/40A50	20x40	A50 - Embossed Micaceous		10**
BSRG20/60A50	20x60	A50 - Embossed Micaceous		10**
BSRG20/80A50	20x80	A50 - Embossed Micaceous		10**
BSRG20/100A50	20x100	A50 - Embossed Micaceous		10**
BSRG20/120A50	20x120	A50 - Embossed Micaceous		10**
BSRG20/140A50	20x140	A50 - Embossed Micaceous		10**
BSRG20/160A50	20x160	A50 - Embossed Micaceous		10**
BSRG20/40A65	20x40	A65 - Embossed matt Black		10**
BSRG20/60A65	20x60	A65 - Embossed matt Black		10**
BSRG20/80A65	20x80	A65 - Embossed matt Black		10**
BSRG20/100A65	20x100	A65 - Embossed matt Black		10**
BSRG20/120A65	20x120	A65 - Embossed matt Black		10**
BSRG20/140A65	20x140	A65 - Embossed matt Black		10**
BSRG20/160A65	20x160	A65 - Embossed matt Black		10**

* 10% increase for quantities lower than 20.

** 10% increase for quantities lower than those indicated.



bordertec BSJ

Bordertec BSJ is engineered to delimit the perimeter edges of a raised floor or to create a step (in this case we recommend the application of the SWH carborundum anti slippery adhesive strip). Bordertec BSJ has a decorative visible part of 2 cm. To install the Bordertec BSJ profiles, the vertical tile fits into the groove of the profile giving a continuous finishing between the horizontal and the vertical cladding.



BSJ 20 A50

Length: 2,70 meters

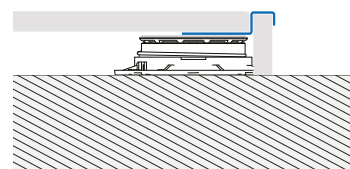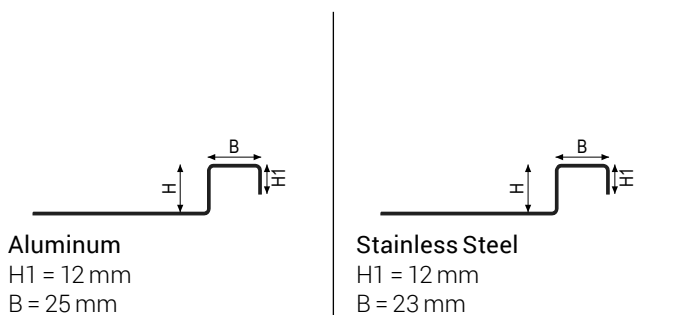

Stainless Steel



IS

bordertec >> BSJ in Stainless Steel AISI 304 - DIN 1.4301 - Brushed				
Cod.	H mm	Finish		pcs
BSJ20IS270	20	IS - Brushed		10**

bordertec >> BSJE External corner in Stainless Steel AISI 304 - DIN 1.4301 - Brushed				
Cod.	H mm	Finish		pcs
BSJE20IS	20	IS - Brushed		10**

Aluminum



A22 A24 A33 A50 A65

bordertec >> BSJ in Power Coated Aluminum				
Cod.	H mm	Finish		pcs
BSJ20A22270	20	A22 - Pastel Grey		10**

bordertec >> BSJE External corner in Power Coated Aluminum				
Cod.	H mm	Finish		pcs
BSJE20A22	20	A22 - Pastel Grey		10**

bordertec >> BSJ in Powder Coated Aluminum Modern Line				
Cod.	H mm	Finish		pcs
BSJ20A24270	20	A24 - Embossed pastel grey		10**
BSJ20A33270	20	A33 - Embossed Dove-Grey		10**
BSJ20A50270	20	A50 - Embossed Micaceous		10**
BSJ20A65270	20	A65 - Embossed matt Black		10**

bordertec >> BSJE External corner in Powder Coated Aluminum Modern Line				
Cod.	H mm	Finish		pcs
BSJE20A24	20	A24 - Embossed pastel grey		10**
BSJE20A33	20	A33 - Embossed Dove-Grey		10**
BSJE20A50	20	A50 - Embossed Micaceous		10**
BSJE20A65	20	A65 - Embossed matt Black		10**

The colors in the Profiltec range, as shown in the final pages of the price list, are available upon request with the following conditions:

- without a surcharge;
- with a delivery time of 5 weeks;
- for a minimum quantity of 100pcs.

* 10% increase for quantities lower than 20.

** 10% increase for quantities lower than those indicated.

bordertec


BST20

Bordertec BST20 is a powder-coated aluminum profile that finishes and protects exposed concrete edges of terraces and balconies and the paver converging while providing openings to bond a riser tile on the vertical facade.




BST 20 A50


Length: 2,70 meters



Aluminum
B = 31,5 mm

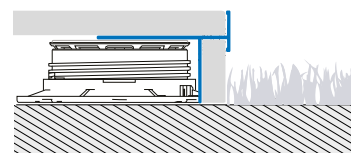

Aluminum



bordertec >> BST in Powder Coated Aluminum				
Cod.	HxH1 mm	Finish		pcs
BST20A22270	20x51	A22 - Pastel Grey		5**

bordertec >> BSTE External corner in Powder Coated Aluminum				
Cod.	HxH1 mm	Finish		pcs
BSTE20A22	20x51	A22 - Pastel Grey		10**

bordertec >> BST in Powder Coated Aluminum Modern Line				
Cod.	HxH1 mm	Finish		pcs
BST20A24270	20x51	A24 - Embossed pastel grey		5**
BST20A33270	20x51	A33 - Embossed Dove-Grey		5**
BST20A50270	20x51	A50 - Embossed Micaceous		5**
BST20A65270	20x51	A65 - Embossed matt Black		5**

bordertec >> BSTE External corner in Powder Coated Aluminum Modern Line				
Cod.	HxH1 mm	Finish		pcs
BSTE20A24	20x51	A24 - Embossed pastel grey		10**
BSTE20A33	20x51	A33 - Embossed Dove-Grey		10**
BSTE20A50	20x51	A50 - Embossed Micaceous		10**
BSTE20A65	20x51	A65 - Embossed matt Black		10**

The colors in the Profilitec range, as shown in the final pages of the price list, are available upon request with the following conditions:

- without a surcharge;
- with a delivery time of 5 weeks;
- for a minimum quantity of 100pcs.

* 10% increase for quantities lower than 20.

** 10% increase for quantities lower than those indicated.




draintec 8

DRAINTEC 8 drainage system provides a drainage layer within a mortar bed while maintaining high load resistance. It is extremely resistant to compression, traction, impact and puncturing; it also ensures perfect mechanical protection of the waterproof layer while being relatively thin at only 8 mm thick. DRAINTEC 8 has a double drainage channel that also fully compensates for hydrostatic pressure, to allow the free passage and management of water within the mortar layer. DRAINTEC 8 drainage system is "loose-laid" onto the sloped waterproof layer. The mortar bed screed layer is then placed over Draintec 8 drainage membrane.

DRAINTEC 8 can be easily cut with normal shears.

Benefits of applying the DRAINTEC 8 system:

- It guarantees less wear on the tiles
- Protects the primary (roofing) waterproofing membrane from damages caused by the aggregates in the mortar screed layer.
- Reduces the presence of efflorescence
- Eliminates hydrostatic pressure
- Contributes acoustic insulation (sound transmission) by providing an 8 mm air gap

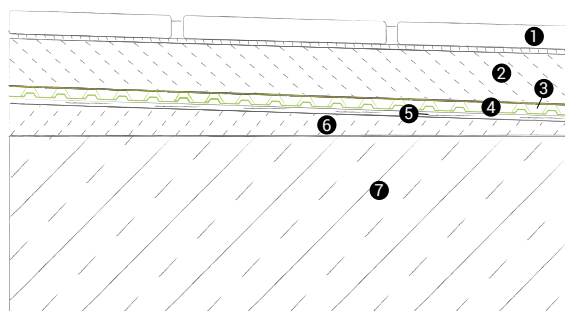

STRATIGRAPHY

1. Tiles
2. Load distribution screed
3. Water outflow cavities
4. **DRAINTEC 8**
5. Drainage membrane
6. Sloping screed
7. Load-bearing structure

draintec 8 >> Polyethylene drainage membrane with a pyramid section with a synthetic filtering fleece							
Cod.	LxB mm	Description		roll			rol / pallet
DRAINTEC-8	15 mx1 m	DRAINTEC HDPE DRAINING MEMBRANE		1			9





draintec 8S

DRAINTEC 8S draining system provides a drainage layer within a mortar bed while maintaining high load resistance. It is extremely resistant to compression, traction, impact and puncturing; it also ensures perfect mechanical protection of the waterproof layer while being relatively thin at only 8 mm thick. DRAINTEC 8S has a double drainage channel that also fully compensates for hydrostatic pressure, to allow the free passage and management of water within the mortar layer. DRAINTEC 8S draining system is "loose-laid" onto the sloped waterproof layer. The mortar bed screed layer is then placed over Draintec 8 drainage membrane.

DRAINTEC 8S, can be easily cut with normal shears. Membrane with 2x2 mm synthetic mesh, ideal for laying floors on draining screed.

Benefits of applying the DRAINTEC 8S system:

- It guarantees less wear on the tiles
- Protects the primary (roofing) waterproofing membrane from damages caused by the aggregates in the mortar screed layer.
- Reduces the presence of efflorescence
- Eliminates hydrostatic pressure
- Contributes acoustic insulation (sound transmission) by providing an 8 mm air gap

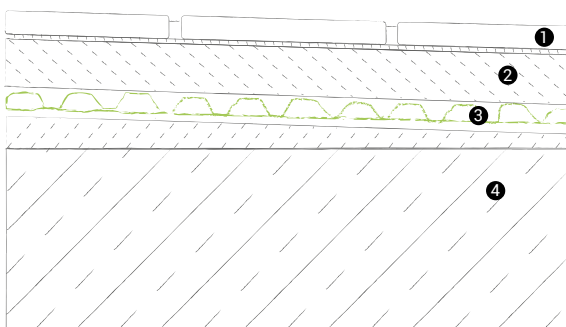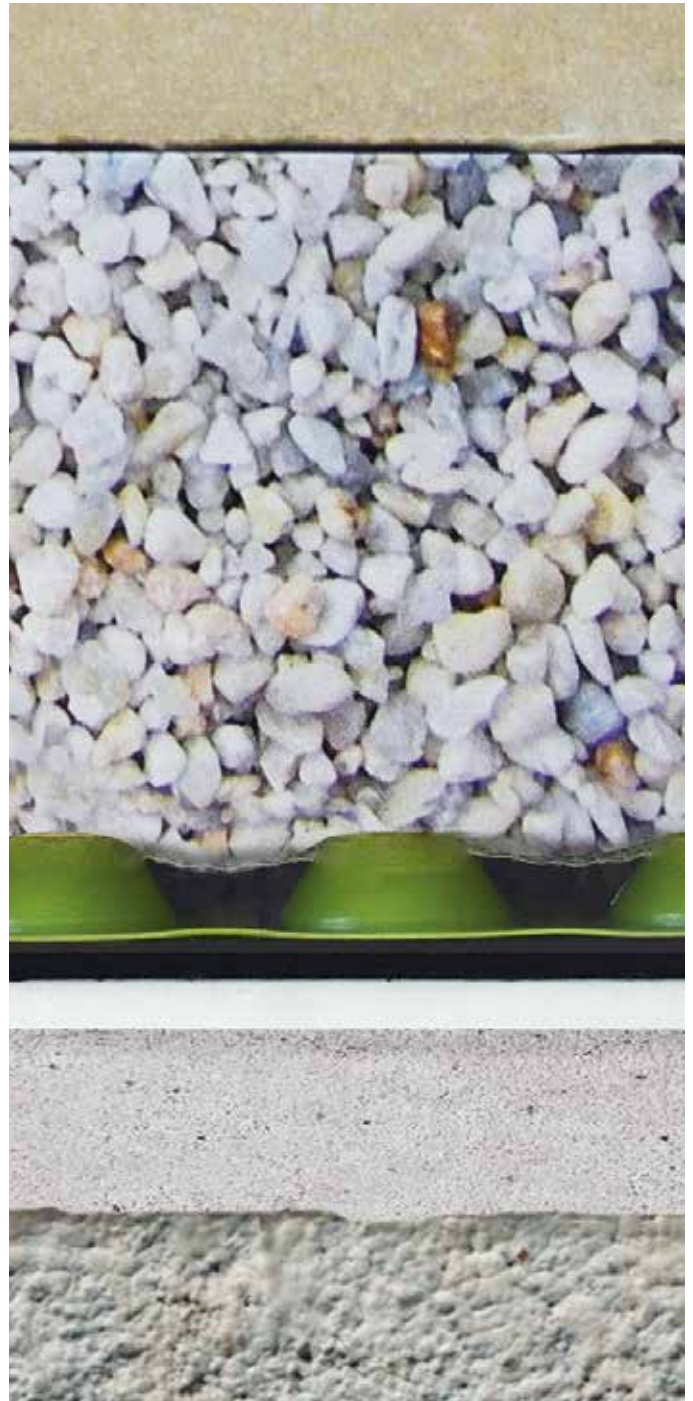

STRATIGRAPHY

1. Tiles
2. Load distribution screed
3. **DRAINTEC 8S**
4. Supporting structure

draintec 8S >> Drainage membrane with knobs and filter fabric for dry laying									
Cod.	LxB mm	Description		roll			rol / pallet		
DRAINTEC-8S	12,5 mx1 m	DRAINTEC HDPE DRAINING MEMBRANE		1			9		


multidrain

MUD - MUDR


Multidrain is a waterproof modular system for linear drainage of surface water. It can be used in tiled structures, outdoor and indoor. The system is made of PP (Polypropylene), a light but resistant material, and is composed of 1,48 meter long combinable channels with lateral or central run-off pipes. The channels internal slope functions as water run-off and is self-cleaning. The system permits even floor tiling with great time saving. The channel has a pre-felted fabric on its edge, allowing the installation of waterproofing systems (thin bed installation). The grid frames are made of stainless steel AISI 316L. The system is equipped with run-off pipes, end pieces and grids in stainless steel AISI 304. Note: On request the grids can be supplied in stainless steel AISI 316L. The channel can be inspected.



Maximum system length: MUD 9,20 m - MUDR 6,25 m




MUD
H = 11 cm



MUDR
H = 7 cm

MUD - MUDR

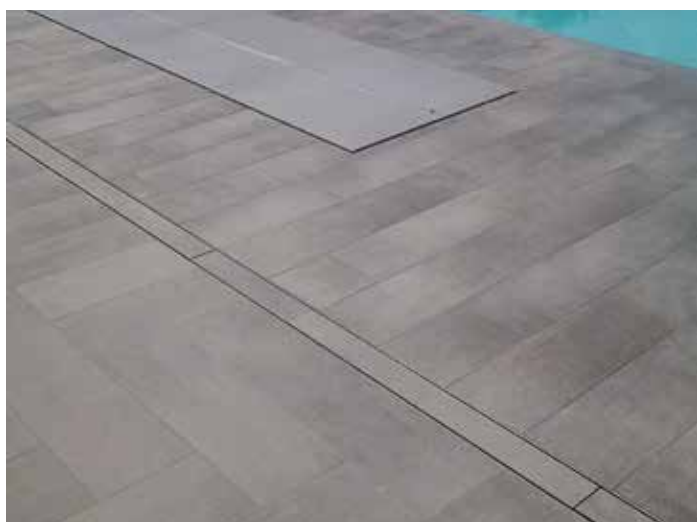

MUDR



MUD



MUD1500HIL



Example of the maximum development of the multidrain MUD system



MUDR1500HIL



Example of the maximum development of the multidrain MUDR system

multidrain >> MUD linear draining system + Tileable grate in Stainless Steel AISI 304 - Polished					
Cod.	L mm	Finish		pcs	
MUD1500HIL	1500	IL - Polished		1	
MUD1500LIL	1500	IL - Polished		1	
MUD1500MIL	1500	IL - Polished		1	

multidrain >> MUD linear draining system + Grate in Stainless Steel AISI 316 - Brushed					
Cod.	L mm	Finish		pcs	
MUD1500HISM	1500	ISM - Brushed		1	
MUD1500LISM	1500	ISM - Brushed		1	
MUD1500MISM	1500	ISM - Brushed		1	

multidrain >> MUD-T Endplate				
Cod.	L mm	Finish		pcs
MUD100T	X	-		1

multidrain >> MUD Endplate with drain outlet				
Cod.	L mm	Finish		pcs
MUD50S	35	-		1
MUD75HS	35	-		1
MUD75LS	35	-		1

multidrain >> MUD Run-off pine + Tileable grate in Stainless Steel AISI 304 - Polished				
Cod.	L mm	Finish		pcs
MUD90SIL	200	IL - Polished		1

multidrain >> MUD Run-off pine + Grate in Stainless Steel AISI 316 - Brushed				
Cod.	L mm	Finish		pcs
MUD90SISM	200	ISM - Brushed		1

multidrain >> MUD Endcap				
Cod.	L mm	Finish		pcs
MUD50C	35	-		1
MUD75C	35	-		1

multidrain >> MUD Mounting kit				
Cod.	L mm	Finish		pcs
MUD/KIT	X	-		1

multidrain >> MUDR linear draining system + Tileable grate in Stainless Steel AISI 304 - Polished					
Cod.	L mm	Finish		pcs	
MUDR1500HIL	1500	IL - Polished		1	
MUDR1500LIL	1500	IL - Polished		1	

multidrain >> MUDR linear draining system + Grate in Stainless Steel AISI 316 - Brushed					
Cod.	L mm	Finish		pcs	
MUDR1500HISM	1500	ISM - Brushed		1	
MUDR1500LISM	1500	ISM - Brushed		1	

multidrain >> MUDR-T Endplate				
Cod.	L mm	Finish		pcs
MUDR100T	X	-		1

multidrain >> MUDR-DS Dual outlet run-off pine + Tileable grate in Stainless Steel AISI 304 - Polished				
Cod.	L mm	Finish		pcs
MUDR50DSIL	248	IL - Polished		1

multidrain >> MUDR-DS Dual outlet run-off pine + Grate in Stainless Steel AISI 316 - Brushed				
Cod.	L mm	Finish		pcs
MUDR50DSISM	248	ISM - Brushed		1

multidrain >> MUDR Endplate with drain outlet				
Cod.	L mm	Finish		pcs
MUDR50HS	35	-		1
MUDR50LS	35	-		1
MUD50C	35	-		1


multidrain >> MUDR Mounting kit				
Cod.	L mm	Finish		pcs
MUDR/KIT	X	-		1

spacers DISC

ABS tie-bases for laying on stone or draining screed, for natural stone outdoor floors, concrete tiles or ceramic tiles. They can be used in different types of laying, dry, running or irregular laying. The product is made of ABS material resistant to UV rays and temperatures. It is transparent in such a way as to be invisible if the crushed stone is moved. At the base they have holes to facilitate water drainage. The tie-bases, thanks to the predefined breaking points, are easily adaptable to the various needs, obtaining central, corner or terminal tie-bases according to the need.



DISC10



DISC
B = 3 mm

DISC

tile spacers » DISC spacer thickness 3 mm					
Cod.	H mm	Finish		pck	
DISC10	10	-ABS		100	

1 pck. = 100 pcs. (indivisible)



Marketing

Display materials specifically created to showcase the strengths of the products in the range, designed for use in all types of retail outlets and showrooms.

Displays and stands for showrooms and stores.

Comprehensive and up-to-date printed and info materials for technicians in the field.

Product samples to always have the right product with you.

Table Display

Table Display			
Cod.	H1 mm	Description	
ESP-UPT/ITENFRDEES	27 x 21 x 33	TABLE DISPLAY UPTEC	
UPTEC-SAMPLE/CASE		UPTEC-SAMPLE CASE	



ESP-UPT/ITENFRDEES



UPTEC-SAMPLE/CASE

Illustrative Brochure

Illustrative Book			
Cod.	H1 mm	Description	
BOOKUPT/DE	21 x 21	BOOK UPTEC DE	
BOOKUPT/EN	21 x 21	BOOK UPTEC EN	
BOOKUPT/ES	21 x 21	BOOK UPTEC ES	
BOOKUPT/FR	21 x 21	BOOK UPTEC FR	
BOOKUPT/IT	21 x 21	BOOK UPTEC IT	
BOOKUPT/PL	21 x 21	BOOK UPTEC PL	



Illustrative Brochure

Set Sample

Samples » Color Swatches			
Cod.	H1 mm	Description	
CHAIN_BORDER_UPT	X	CHAIN BORDER UPTEC	



CHAIN_BORDER_UPT

Display

Display			
Cod.	H1 mm	Description	
TOTEM_UPTEC/EU	58 x 58 x 13,5	TOTEM DEMO UPTec EU	



TOTEM_UPTEC/EU

Price list

Price List >> Price List Profiltec			
Cod.	H1 mm	Description	
LISTOUTD25/DE	21 x 29,7	OUTDOOR PRICE LIST 2025 GERMAN	
LISTOUTD25/EN	21 x 29,7	OUTDOOR PRICE LIST 2025 ENGLISH	
LISTOUTD25/ES	21 x 29,7	OUTDOOR PRICE LIST 2025 SPANISH	
LISTOUTD25/FR	21 x 29,7	OUTDOOR PRICE LIST 2025 FRENCH	
LISTOUTD25/IT	21 x 29,7	OUTDOOR PRICE LIST 2025 ITALIAN	
LISTOUTD25/PT	21 x 29,7	OUTDOOR PRICE LIST 2025 PORTUGUESE	



LISTOUTD25

Technical Manual

Technical Manual			
Cod.	H1 mm	Description	
MANUPT23ITENFRDEES	16,5 x 23	UPTec MANUAL	
MAN_BALC_DE0624	21 x 29,7	BALCOTEC MANUAL DE	
MAN_BALC_EN0624	21 x 29,7	BALCOTEC MANUAL EN	
MAN_BALC_ES0624	21 x 29,7	BALCOTEC MANUAL ES	
MAN_BALC_FR0624	21 x 29,7	BALCOTEC MANUAL FR	
MAN_BALC_IT0624	21 x 29,7	BALCOTEC MANUAL IT	
MAN_BALC_PL0624	21 x 29,7	BALCOTEC MANUAL PL	
MAN_BALC_PT0624	21 x 29,7	BALCOTEC MANUAL PT	

Item Code / Profile Section

Material / Finish

Main measure

Profile lenght





Powder coated aluminum




A11
Pure White (Ref. RAL 9010)




AM11
Matt white



A12
Ivory White (Ref. RAL 9001)



A13
Antique embossed white



A14
Arctic white (embossed)



A41
Cream (Ref. RAL 1015)



A42
Ivory (Ref. RAL 1013)



A21
Soft Grey (Ref. RAL 9018)



A22
Pastel Grey (Ref. RAL 7038)



A23
Cement Grey (Ref. RAL 7030)



A24
Embossed pastel grey



A25
Embossed cement grey




A50
Embossed Micaceous Grey



A34
Embossed kaki



A31
Beige bahama



A33
Embossed dove



A32
Dark Beige (Ref. RAL 1019)



A60
Embossed corten



A62
Red Brown




A63
Dark Brown



A64
Embossed dark brown



A51
Black (Ref. RAL 9005)



A54
Matt black



A65
Embossed matt black



General terms and conditions:

1. EFFECTIVENESS OF THE GENERAL CONDITIONS

These general conditions of sale, hereinafter "General Conditions of Sale", regulate all contractual relations for the sale of products (hereinafter "Product / s" or "Goods / s") concluded by the company Profilitec S.p.A. (hereinafter "Profilitec") with its customers (hereinafter "Buyer" or "Customer / s" and, jointly with Profilitec, "Parties"). The General Conditions of Sale are applied to the individual sales contracts stipulated by Profilitec with its Customers (hereinafter "Contract / s") even if not expressly referred to, and / or signed for acceptance, in the individual Contracts. Any special provisions contained in the individual Contracts, which derogate from the provisions of the General Conditions of Sale, prevail over the latter. These General Conditions are effective until they are replaced by new General Conditions, it being understood that the new General Conditions of sale apply only to Contracts entered into after their entry into force. The General Conditions of Sale constitute the only conditions applicable to all Contracts, thus prevailing over any other conditions applied by Customers and third parties - which Profilitec declares herewith not to accept - and cannot be waived except as separately stipulated in the Contract or a specific written agreement between the Seller and the Customer.

2. ORDER

The Goods object of each sale between the Buyer and Profilitec are described in the order form (called "Sales Order Confirmation" or with equivalent wording, hereinafter "Order") prepared by Profilitec for each Product request received by the Customer, indicating the type of Products ordered and, for each Product, the quantity requested. The Order must be signed and transmitted by the Buyer - directly or through its representatives - to Profilitec.

3. CONTRACT

The Contract is understood to be entered into between Profilitec and the Customer when Profilitec receives the Order signed by the Customer or, in the absence of this and written communication of dispute of the Order by the Customer, once 1 working day has elapsed from the date of transmission of the Order Confirmation by Profilitec to the Customer. Following the conclusion of the Contract, the Customer cannot refuse to accept the Products (except as otherwise provided for in articles 8 and 11) and / or withdraw from the Contract.

4. PRICES

The prices of the Products, expressed in euros, are those indicated in the Profilitec price list in force on the date the Order is sent, subject to different prices negotiated between the Parties and resulting from the Contract. In any case, Profilitec reserves the right at any time to update the price list, without notice, it being understood that - unless otherwise agreed between the Parties - any update of the existing price list will be applied to the Orders sent to Profilitec starting from the date of entry into force of the new price list. The prices of the Products referred to in the Profilitec price list are net of (i) taxes, duties, or other charges that may affect the Products and (ii) transport and installation costs of the Products, which will be quantified from time to time by Profilitec and charged to the Customer. Please note that, if applicable, Profilitec will bear the costs of delivery and transport, only and exclusively for a single delivery destination.

5. PAYMENTS AND EXPENSES

Payments must be made by the Purchaser in the manner and within the timeframe established in the Contract or, in the absence of provisions of the Contract in this regard, by bank transfer within 30 days from the invoice issue date. Any negotiations, offers, sales, endorsements, collections, rebates made by Profilitec agents or intermediaries are not valid unless authorized in writing by Profilitec. For Orders of less than € 200.00 the following additional costs are charged to the Customer: € 12.00 for shipments to Italy, € 15.00 for shipments to EU countries and € 30.00 for shipments to extra-EU countries. Customers incur an administrative fee of € 15.00 for overdue payments of invoices. Further, in the event of late payment of invoices, even partial, the Customer incurs interest on arrears as per Article 5 of Legislative Decree 231/2002, as amended and / or supplemented from time to time, starting from the expiry date of the term for payment and without the need for prior notification to the Customer. The non-payment, even partial, of any sum due by the Buyer, or the total or partial non-fulfillment of contractual obligations or agreed conditions by the Buyer for the supply of products by Profilitec, authorizes the latter to suspend the execution of further supply of products under existing Contracts (also if different from the one affected by the non-fulfillment) and / or to subordinate its execution to the issue of adequate payment guarantees by the Buyer, albeit without incurring any responsibility in doing so.

6. TERMS OF DELIVERY AND TRANSPORT

The terms of delivery of the Goods shall be agreed from time to time and reflected in the Contract. In the absence of provisions in the Contract in this regard, the delivery time is 30 (thirty) days from the issue date of the Order Confirmation. The delivery terms are indicative, not essential for the Customer and not binding for Profilitec. Unless otherwise agreed between the Parties and stipulated in the Contract, the delivery of Products is ex works at the Profilitec warehouse. At the request of the Customer, Profilitec arranges transport and delivery of the Products, with related costs and charges being charged to the Customer, as indicated in Article 5 of the General Conditions of Sale. Profilitec is entitled to anticipate or postpone the delivery of all or part of the Products, without this giving the Buyer the right to request the total or partial termination of the Contract, nor the payment of compensation or damages. The Buyer may not refuse delivery of the Products even if delivery terms have expired. At the request of the Buyer, Profilitec is able to offer an express delivery service. The price increase due for the express delivery service is indicated in the Order. However, express delivery is only available for packages up to 2.8 meters in length. Packages longer than 2.8 meters travel exclusively by normal courier (not express) and their shipment incurs a fixed surcharge of € 35.00 in the form of extra transport costs. If the Purchaser, with the exception of cases referred to in Article 8 of the General Conditions of Sale, refuses to receive delivery of all or part of the Products, Profilitec remains entitled to the full payment agreed in the Contract, or alternatively may terminate the Contract pursuant to Article 1456 of the Italian Civil Code, without prejudice to the right to compensation for damages. If the Parties expressly agree in the Contract that the delivery of the Product must take place ex works at the Profilitec warehouse and the Customer does not collect the Product within 2 days from the date on which Profilitec has made it available, the Customer is deemed to have refused to receive delivery of the Product, thereby submitting to the provisions of this clause. In this case, as well as in the event of unsuccessful delivery of the Product due to a cause attributable to the Customer, any liability for Profilitec for risks and costs deriving from, or inherent to, with the storage of the Goods being excluded, shall be borne entirely by the Buyer. In this case any advance payments made by the Customer are considered compensation to Profilitec as penalty for failure to collect the Goods or, if applicable, for failure to deliver the Goods for reasons attributable to the Customer. In case of delay in the delivery of the Products due to force majeure (such as, by way of example and not limited to transport interruptions, delays or non-delivery of materials by suppliers necessary for the production of the Goods, a significant increase in costs and / or unavailability of raw materials or semi-finished products used in the production of Goods, war, insurrection, acts of terrorism, sabotage, piracy, currency restrictions or commercial exchanges, embargoes, etc.), Profilitec is entitled, at its own discretion and promptly notifying the Customer, to extend the delivery term for a period equal to the duration of the force majeure or to withdraw from the Contract, excluding any and all liability of Profilitec towards the Customer in relation to delays or non-delivery. The quantities indicated on the product pages of this price list refer to the standard quantity of items present in the box. In case of orders of different quantities and not multiples of the standard quantity, Profilitec's logistics reserves the right to vary the number of items per box, possibly combining them together. This practice, aimed at optimizing shipments, has the goal of minimizing the risk of damage to the goods and containing the environmental impact of transportation.

7. TECHNICAL INDICATIONS

All specifications, technical data, samples, drawings and photographs of the Products are purely indicative and therefore not binding for Profilitec. When purchasing Profilitec Products and adopting the recommendations and suggestions contained in its documentation, the Purchaser must ascertain that the requested Products are appropriate given his specific requirements. The choice of Product and its use in the context of a specific installation assembly is the sole risk and responsibility of the Purchaser. Profilitec reserves the right to make changes to the Products (without altering their essential characteristics) and to their packaging without prior notice.

8. REPORT OF DEFECTS

The Products purchased must be verified and checked by the Buyer upon receipt. Any apparent shortcomings and defects in the Goods supplied (i.e. defects identifiable with diligent visual inspection upon receipt of the Product) must, under penalty of forfeiture, be contested by the Customer to Profilitec no later than 5 (five) working days from the date of delivery of the Goods, by registered letter or certified email. After this deadline, the Products will be considered for all intents and purposes compliant with the Contract and free from obvious defects and therefore accepted without reservation by the Customer. Any hidden defects of the Goods (i.e. defects that cannot be identified by diligent visual inspection upon receipt of the Product) must be notified by the Purchaser to Profilitec, under penalty of forfeiture, by registered letter or certified email within 5 (five) working days from the discovery and, in any case, no later than 12 (twelve) months after delivery. It is understood that in the event Products that have displayed apparent defects are used or installed, this excludes the possibility of disputes or complaints regarding the defects themselves, resulting in full acceptance of the Products.

9. RESERVE OF OWNERSHIP (Article 1523 of the Italian Civil Code)

The sale of the Products takes place with retention of title in favor of Profilitec until full payment of the agreed price. Failure to comply, even partially, with the agreed payment conditions allows Profilitec to proceed with the recovery of unpaid Products, even if sold to third parties. During the period in which a Customer's agreed price for Products delivered remains unpaid, the Customer is obliged to keep such Products safe and remains liable for any damage to these Products.

10. WARRANTY AND LIMITS

Profilitec provides the Customer with legal guarantees with reference to the Products sold, unless otherwise provided for by the Contract and / or by the General Conditions of Sale. Profilitec is not liable in the event of improper installation and / or use of the Products by the Customer or third parties. Except as provided for by law, in the case of supply of defective Products, the Customer who has promptly reported the defect in accordance with provisions in article 8, is entitled to the replacement of the Product at Profilitec's expense excluding any further compensation and / or remedy. The warranty does not cover (i) aesthetic defects of the Products, e.g. differences in finish or tone in the external appearance of the Product; (ii) normal wear and tear of the Products; (iii) problems resulting from non-compliance, even partial, with the rules, instructions and recommendations contained in the instruction manual and / or in the Product data sheet; (iv) damage caused to the Products by maintenance and / or cleaning with unsuitable products and / or materials; (v) damage resulting from inappropriate selection of the Product given the Customer's requirement. Furthermore, the warranty does not extend to faults and / or defects due to tampering and / or improper use and / or incorrect installation and / or unsuitable storage of the Products and / or due to force majeure. Profilitec declines all responsibility for any damage that may, directly or indirectly, derive to persons or property as a result of failure to comply with all the requirements indicated in the specific documentation accompanying the Products, including the warnings on installation, use and maintenance. No warranty and no remedy, both conventional and legal, other than those provided for by the Contract and the General Conditions of Sale may be invoked by the Purchaser, in particular being expressly excluded any liability assigned to Profilitec for loss of earnings, direct, indirect, incidental damages that may derive from defects, defects and / or non-conformity of the Products, with consequent express and irrevocable renunciation by the Purchaser, within the maximum limits permitted by current legislation.

11. RETURNS

Without prejudice to the provisions of article 10 above, returns of Products are only accepted if previously agreed in writing between the Parties. A return request must be sent in writing to Profilitec and must include, as an attachment, a copy of the invoice and / or transport document relating to the Products to which the return refers. Unless otherwise agreed in writing between the Parties, for each return made pursuant to this clause, Profilitec will charge the Purchaser € 30.00 as an administrative cost and - following acceptance of the return - will issue a credit note in favor of the Purchaser for a value corresponding to 80% (eighty percent) of the price invoiced to the Customer with reference to the returned Product. Returns are accepted only if the packaging and the Products are intact and sealed as in origin. Any costs of new packaging will be charged by Profilitec to the Buyer. Transport costs incurred for the return are borne by the Buyer.

12. INDUSTRIAL AND INTELLECTUAL PROPERTY

Any intellectual property right and / or design, production and commercial technology of Profilitec, whether or not registered and / or patented, must be treated as confidential by the Buyer and must not be used, reproduced and / or disclosed by the same without prior written authorization by Profilitec. All documents (including price lists, catalogs and other similar documents, in paper or digital form) relating to the Products are the exclusive property of Profilitec and cannot be reproduced by the Customer, even partially, without prior written authorization by Profilitec. The Customer is prohibited from any unauthorized use of Profilitec trademarks, logos and distinctive signs as well as any other trademarks, logos and distinctive signs shown on the Products and / or related to them, as well as the use of names and / or signs badges and / or patents and / or models and / or drawings relating to the Products.

13. PRIVACY

In respect of the provisions of art. 13 of the European Data Protection Regulation n. 2016/679 (GDPR), the execution of these General Conditions of Sale, may lead to personal and contact information being shared between Profilitec and the Purchaser, or in any case made available to their respective persons, (e.g. contact details, company email, company phone) of directors, employees and collaborators who, in relation to the tasks and duties assigned, manage and / or execute the Contract. Profilitec and the Buyer undertake to process such personal data to the extent that they are strictly necessary for the execution of all aspects of the Contract. Profilitec shall store this information for the entire duration of the Contract and beyond for the fulfillment of all legal obligations, in compliance with the statute of limitations for the rights involved. Profilitec and the Purchaser are, each independently, Data Controllers of personal data in their respective fields in the context of the execution of the Contract.

14. APPLICABLE LAW AND JURISDICTION

The law applicable to these General Conditions of Sale and to each Contract concluded between Profilitec and the Buyer is exclusively the Italian one. For any dispute that may arise between the Parties relating to these General Conditions of Sale and / or to each Contract (including those relating to their interpretation, validity, effectiveness, execution and resolution) is the exclusive competence of the Court of Vicenza.



To be agreed with Profilitec's sales department.

This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.





Code Key:

☐ = Product available in formable version

☐ = Product available in 0.90 m or 1.35 m pre-cut version

🚚 = Client transport cost contribution (of 3%) for shipping of voluminous products has been added directly to the displayed gross price

ALL RIGHTS ARE RESERVED

Reproduction in whole or in part of texts, photos and illustrations appearing in this catalog is prohibited without written permission from Profilitec S.p.A.

Price List Profilitec S.p.A. - Code LISTOUTD25/EN

January 2025 - Rev.00







Valid from January 1st 2025

Distribution not controlled.

Contextual end of validity date to completion of new price list printing.

Copyright by Profilitec S.p.A. 36033 Isola Vicentina (VI) Italy



-  Pedestals for raised floors
-  Perimeter profiles for terraces
-  Membranes
-  Drainage systems
-  Tile installation accessories
-  Marketing



Profilitec S.p.A.
Via Scotte, 3
36033 - Isola Vicentina
(Vicenza) ITALY

Tel: +39 0444 268311
e-mail: profilitec@profilitec.com
e-mail: ordini@profilitec.com

Profilitec Corp.
472 Meeting Street
Suite C, #301
Charleston, SC 29403

Tel: 855 290 9591
e-mail: customerservice@profilitec.com

Profilitec Ibérica, S.L.U.
Camí de Betxí, nº 2
12540 - Vila-Real
(Castellón) ESPAÑA

Tel: +34 964 18 29 84
e-mail: iberica@profilitec.com
e-mail: pedidos@profilitec.com

Profilitec France
26 rue Berjon
69009 - Lyon
FRANCE

Tel: +33 489479882
e-mail: france@profilitec.com

Price List Profilitec S.p.A. - Code LISTOUTD25/EN
January 2025
Distribution not controlled.

