





woodtec LTR

Resilient materials are commonly used for floors and walls as well as over existing flooring. For thinner flooring materials, we recommend profiles that can be solidly anchored and provide maximum edge protection. The WOODTEC family of profiles meets these needs by providing a solid base with tapered openings for mechanical fastening or to be adhered using appropriate adhesive. LTR profile's minimalist design provide excellent edge protection for thinner flooring materials.





LTR30AT

Length: 2,70 meters

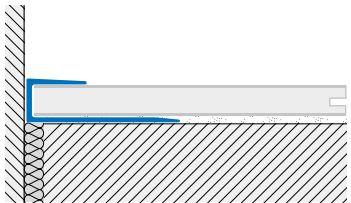

Aluminum



woodtec >> LTR in Anodized Aluminum - Drilled				
Item	H mm	Finish		pcs
LTR30ASF270	3	AS - Silver		50
LTR50ASF270	5	AS - Silver		50
LTR60ASF270	6	AS - Silver		50
LTR30ATF270	3	AT - Titan		50
LTR50ATF270	5	AT - Titan		50
LTR60ATF270	6	AT - Titan		50

woodtec >> LTR in embossed Powder Coated Aluminum - Drilled				
Item	H mm	Finish		pcs
LTR30A65F270	3	A65 - Embossed matt black		50
LTR50A65F270	5	A65 - Embossed matt black		50
LTR60A65F270	6	A65 - Embossed matt black		50

** 10% increase for quantities lower than those indicated (■)
 * 10% increase for quantities lower than 20 (■)