



Resilient - LVT/SPC profiles

Resilient floors have evolved over the years to become more and more advanced and refined products. These floors increasingly resemble wood and stone and are durable. The resilient profile range features finishes and sizes that best suit the most common installation options. The openings on the base of the profile have been specifically designed to facilitate installation and to better adapt to the various combinations of floors with even and varying height thicknesses while protecting exposed edges.





trimtec TR-KJ

Resilient materials are commonly used for floors and walls as well as over existing flooring. For thinner flooring materials, we recommend profiles that can be solidly anchored and provide maximum edge protection. TR and KJ family of profiles meets these needs by providing a solid base with tapered openings for mechanical fastening or to be adhered using appropriate adhesive.





TR30AS

Length: 2,70 meters



Aluminum



trimtec >> TR-KJ in Anodized Aluminum - Drilled				
Item	H mm	Finish		pcs
TR30ASF270	3	AS - Silver		50
TR45ASF270	4,5	AS - Silver		50
TR60ASF270	6	AS - Silver		50
KJ30ATF270	3	AT - Titan		50
KJ45ATF270	4,5	AT - Titan		40
KJ60ATF270	6	AT - Titan		40

trimtec >> TR-KJ in embossed Powder Coated Aluminum - Drilled				
Item	H mm	Finish		pcs
KJ30A65F270	3	A65 - Embossed matt Black		50
KJ45A65F270	4,5	A65 - Embossed matt Black		40
KJ60A65F270	6	A65 - Embossed matt Black		40

* 10% increase for quantities lower than 20 (■)

** 10% increase for quantities lower than those indicated (■)




mosaitect SJM

MOSAICTEC SJM is a multipurpose profile to match floor and wall coverings or used as edgings or decorative listellos, with a perfect symmetry of the 2 visible sides. This profile has been specially conceived for thin floors and mosaics, its reduced wing size and thickness is designed to provide the perfect solution for the neat finishing of mosaic tesseras, ensuring a neat, level surface finish. MOSAICTEC SJM belongs to a complete series of solutions for mosaics. A special cubic end cap is available, multipurpose to match with all installation needs.



SJM44AS

Length: 2,70 meters



Aluminum
B = 5,1 mm



Aluminum



AS

mosaitect >> SJM in Anodized Aluminum for mosaic and thin tiles				
Item	H mm	Finish		pcs
SJM44AS270	4,4	AS - Silver		50*

squarecapsula >> SJC in Anodized Aluminum				
Item	H mm	Finish		pcs / set
SJC44ASSET2	4,4	AS - Silver		2

* 10% increase for quantities lower than 20.
** 10% increase for quantities lower than those indicated.



covertec SP

COVERTEC SP is a profile designed to join two adjacent existing floors at the same height but it can cover imperfections in cutting or slight variations of height to be found on a tiled floor joining to a wooden one for example. Thanks to its shape, available in 3 different widths, this profile helps floor coverings to maintain the minimum distance thus acting also as a dilatation joint.





SP9AS

Length: 2,70 meters




SP9 - Aluminum
H = 4,5 mm



It is recommended to use FIXXTEC multipurpose adhesive to bond the product. For further information, see page 368.

- ☑ **SELFLINE**/KIT PRE-CUT
- ☑ **CURVELINE**/BENDABLE

Aluminum



covertec >> SP in Anodized Aluminum					
Item	B mm	Finish		pcs	
SP9AS270	9	AS - Silver		50*	☑☑

covertec >> SP Embossed Powder Coated Aluminum					
Item	B mm	Finish		pcs	
SP9A65270	9	A65 - Embossed matt Black		50*	☑

* 10% increase for quantities lower than 20.

** 10% increase for quantities lower than those indicated.




zerotec ZLT

Resilient materials are commonly used for floors and walls as well as over existing flooring. For thinner flooring materials, we recommend profiles that can be solidly anchored and provide maximum edge protection. The ZEROTEC family of profiles meets these needs by providing a solid base with tapered openings for mechanical fastening or to be adhered using appropriate adhesive. ZLT profiles provide sloped and ADA-compliant edge protection for resilient flooring materials of different heights ranging from 0 to up to ¼" (6mm).




ZLT30A65

Length: 2,70 meters




Aluminum - ZLT30

B = 6 mm
B1 = 7 mm




Aluminum - ZLT50

B = 6 mm
B1 = 14 mm





Aluminum - ZLT60

B = 11 mm
B1 = 16 mm



Aluminum



zerotec >> ZLT in Anodized Aluminum - Drilled				
Item	H mm	Finish		pcs
ZLT30ASF270	3	AS - Silver		50
ZLT50ASF270	5	AS - Silver		40
ZLT60ASF270	6	AS - Silver		30
ZLT30ATF270	3	AT - Titan		50
ZLT50ATF270	5	AT - Titan		40
ZLT60ATF270	6	AT - Titan		30

zerotec >> ZLT in embossed Powder Coated Aluminum - Drilled				
Item	H mm	Finish		pcs
ZLT30A65F270	3	A65 - Embossed matt black		50
ZLT50A65F270	5	A65 - Embossed matt black		40
ZLT60A65F270	6	A65 - Embossed matt black		30

* 10% increase for quantities lower than 20 (■)

** 10% increase for quantities lower than those indicated (■)




zerotec ZLT25

Resilient materials are commonly used for floors and walls as well as over existing flooring. For thinner flooring materials, we recommend profiles that can be solidly anchored and provide maximum edge protection. The ZEROTEC family of profiles meets these needs by providing a solid base with tapered openings for mechanical fastening or to be adhered using appropriate adhesive. ZLT25 profiles provide sloped and ADA-compliant edge protection for resilient flooring materials of different heights ranging from 2,5 mm up to 5 mm or 6 mm.




ZLT25/60AS

Length: 2,70 meters




Aluminum - ZLT25/50

B = 6 mm
B1 = 9,5 mm
H1 = 2,5 mm




Aluminum - ZLT25/60

B = 11 mm
B1 = 11 mm
H1 = 2,5 mm




Aluminum



AS

AT

A65



zerotec >> ZLT25 in Anodized Aluminum - Drilled

Item	H mm	Finish		pcs
ZLT25/50ASF270	5	AS - Silver		50
ZLT25/60ASF270	6	AS - Silver		40
ZLT25/50ATF270	5	AT - Titan		50
ZLT25/60ATF270	6	AT - Titan		40

zerotec >> ZLT25 in embossed Powder Coated Aluminum - Drilled

Item	H mm	Finish		pcs
ZLT25/50A65F270	5	A65 - Embossed matt black		50
ZLT25/60A65F270	6	A65 - Embossed matt black		40

* 10% increase for quantities lower than 20 (■)

** 10% increase for quantities lower than those indicated (■)




zerotec ZR

Resilient materials are commonly used for floors and walls as well as over existing flooring. For thinner flooring materials, we recommend profiles that can be solidly anchored and provide maximum edge protection. The ZEROTEC family of profiles, particularly the ZR50 profile, meets these needs by providing a solid base with tapered openings for mechanical fastening or to be adhered using appropriate adhesive. ZR50 profiles provide sloped and ADA-compliant edge protection for resilient flooring materials.



ZR50AT

Length: 2,70 meters





Aluminum
ZR50A* - B=15,1 mm

☑ **SELFLINE**/KIT PRE-CUT
☑ **CURVELINE**/BENDABLE



Aluminum



zerotec >> ZR in Anodized Aluminum - Drilled				
Item	H mm	Finish		pcs
ZR50ASF270	5	AS - Silver		50
ZR50ATF270	5	AT - Titan		50

zerotec >> ZR in embossed Powder Coated Aluminum - Drilled				
Item	H mm	Finish		pcs
ZR50A65F270	5	A65 - Embossed matt black		50

* 10% increase for quantities lower than 20 (■)
** 10% increase for quantities lower than those indicated (■)

For SELFLINE/CURVELINE L= 0,9 - 1,35 m as per page 388



multiclip LVT CL

The patented MULTICLIP LVT system (base + clip + cover) provides a complete series of profiles for low thicknesses. The use of the modular "clips" allows, thanks to the special interlocking between the base and the cover, to ensure a secure anchorage by adapting to the height of the floors and to any unevenness of the connection. It therefore turns out to be a multipurpose and versatile system.



CLB40ANF + CL40P

Length: 2,70 meters



CL40P - Synthetic Resin



CLB40ANF - Aluminum

H = 4,8 mm

It is recommended to use FIXXTEC multipurpose adhesive to bond the product. For further information, see page 368.


Synthetic Resin

multiclip LVT >> CL in Synthetic Resin				
Item	H mm	Finish		pcs
CL40P270	4,8	P23 - Resin		120*

Aluminum



AN



multiclip LVT >> CLB Drilled fixing base in in Natural Aluminum				
Item	H mm	Finish		pcs
CLB40ANF270	4	AN - Natural		60*

* 10% increase for quantities lower than 20.

** 10% increase for quantities lower than those indicated.

For SELFLINE/CURVELINE L= 0,9 - 1,35 m as per page 388




multiclip LVT CLG

Patented coplanar joint profile. The innovative, ingenious clip system in Resinil (thermoplastic synthetic resin) allows, by simple rotation, to compensate level differences of up to 1.5 mm. The system can also join floors with thicknesses varying from 4 to 6 mm. It additionally acts as a movement joint profile, since the internal cavity allows the underlying flooring to move up to ± 2 mm.



CLB40ANF + CL40P + CLG260AS


Length: 2,70 meters



Aluminum

H = 4÷6 mm

☒ **SELFLINE**/KIT PRE-CUT



Aluminum



multiclip LVT >> CLG260 in Anodized Aluminum					
Item	B mm	Finish		pcs	
CLG260AS270	26	AS - Silver		40*	☒ ☒
CLG260AO270	26	AO - Gold		40*	☒ ☒
CLG260AB270	26	AB - Bronze		40*	☒ ☒

multiclip LVT >> CLG260 in High resistance Wood Laminated Aluminum					
Item	B mm	Finish		pcs	
CLG260RS270	26	RS - Bleached		40*	☒
CLG260AC270	26	AC - Maple		40*	☒
CLG260FA270	26	FA - Beechwood		40*	☒
CLG260RO270	26	RO - Oak		40*	
CLG260CI270	26	CI - Cherry		40*	☒
CLG260NC270	26	NC - Light Walnut		40*	☒
CLG260NS270	26	NS - Dark Walnut		40*	☒
CLG260WE270	26	WE - Wengé		40*	☒
CLG260RW270	26	RW - Wengé Oak		40*	☒
CLG260RD270	26	RD - Decapè Oak		40*	☒
CLG260RG270	26	RG - Grey Oak		40*	☒

* 10% increase for quantities lower than 20.

** 10% increase for quantities lower than those indicated.

For SELFLINE/CURVELINE L= 0,9 - 1,35 m as per page 388


multiclip LVT CLF

Patented end profile to join level differences from 0 to 6 mm. A plastic clip allows the elements of system MULTICLIP to be perfectly combined, creating a resistant and flexible system. The slight rotation of the finishing profile allows the system to seamlessly adapt to level differences.




CLB40ANF + CL40P + CLF320AS

Length: 2,70 meters




Aluminum

H = 4 to 6 mm



Aluminum



multiclip LVT >> CLF320 in Anodized Aluminum					
Item	B mm	Finish		pcs	
CLF320AS270	32	AS - Silver		40*	
CLF320AO270	32	AO - Gold		40*	
CLF320AB270	32	AB - Bronze		40*	

multiclip LVT >> CLF320 in High resistance Wood Laminated Aluminum					
Item	B mm	Finish		pcs	
CLF320RS270	32	RS - Bleached		40*	
CLF320AC270	32	AC - Maple		40*	
CLF320FA270	32	FA - Beechwood		40*	
CLF320RO270	32	RO - Oak		40*	
CLF320CI270	32	CI - Cherry		40*	
CLF320NC270	32	NC - Light Walnut		40*	
CLF320NS270	32	NS - Dark Walnut		40*	
CLF320WE270	32	WE - Wengé		40*	
CLF320RW270	32	RW - Wengé Oak		40*	
CLF320RD270	32	RD - Decapè Oak		40*	
CLF320RG270	32	RG - Grey Oak		40*	

* 10% increase for quantities lower than 20.

** 10% increase for quantities lower than those indicated.




multiclip LVT CLP

Patented perimeter profile for LVT/SPC floors requiring an expansion gap – the internal 12mm cavity allows the underlying flooring to move more than ± 4 mm. Eliminates the need for baseboards, guaranteeing the expansion and perimetrical fastening of the floor. May be used as entrance mat framing and in front of sliding doors.




CLB40ANF + CL40P + CLP240AS

Length: 2,70 meters





Aluminum

H = 4 to 6 mm



Aluminum

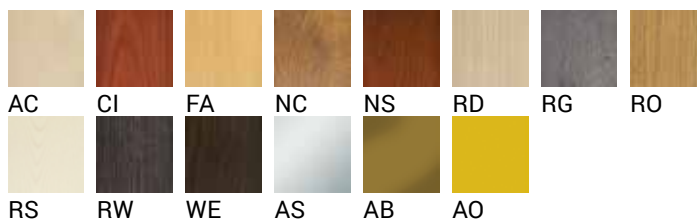

multiclip LVT >> CLP240 in Anodized Aluminum					
Item	B mm	Finish		pcs	
CLP240AS270	24	AS - Silver		40*	
CLP240AO270	24	AO - Gold		40*	
CLP240AB270	24	AB - Bronze		40*	

multiclip LVT >> CLP240 in High resistance Wood Laminated Aluminum					
Item	B mm	Finish		pcs	
CLP240RS270	24	RS - Bleached		50*	
CLP240AC270	24	AC - Maple		40*	
CLP240FA270	24	FA - Beechwood		50*	
CLP240RO270	24	RO - Oak		50*	
CLP240CI270	24	CI - Cherry		50*	
CLP240NC270	24	NC - Light Walnut		50*	
CLP240NS270	24	NS - Dark Walnut		50*	
CLP240WE270	24	WE - Wengé		50*	
CLP240RW270	24	RW - Wengé Oak		50*	
CLP240RD270	24	RD - Decapè Oak		50*	
CLP240RG270	24	RG - Grey Oak		50*	

* 10% increase for quantities lower than 20.

** 10% increase for quantities lower than those indicated.

For SELFLINE/CURVELINE L= 0,9 - 1,35 m as per page 388





woodtec LTR

Resilient materials are commonly used for floors and walls as well as over existing flooring. For thinner flooring materials, we recommend profiles that can be solidly anchored and provide maximum edge protection. The WOODTEC family of profiles meets these needs by providing a solid base with tapered openings for mechanical fastening or to be adhered using appropriate adhesive. LTR profile's minimalist design provide excellent edge protection for thinner flooring materials.





LTR30AT

Length: 2,70 meters

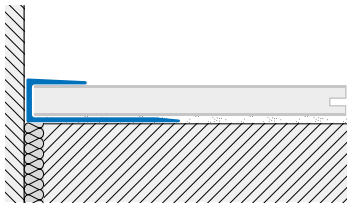

Aluminum



woodtec >> LTR in Anodized Aluminum - Drilled				
Item	H mm	Finish		pcs
LTR30ASF270	3	AS - Silver		50
LTR50ASF270	5	AS - Silver		50
LTR60ASF270	6	AS - Silver		50
LTR30ATF270	3	AT - Titan		50
LTR50ATF270	5	AT - Titan		50
LTR60ATF270	6	AT - Titan		50

woodtec >> LTR in embossed Powder Coated Aluminum - Drilled				
Item	H mm	Finish		pcs
LTR30A65F270	3	A65 - Embossed matt black		50
LTR50A65F270	5	A65 - Embossed matt black		50
LTR60A65F270	6	A65 - Embossed matt black		50

** 10% increase for quantities lower than those indicated (■)
 * 10% increase for quantities lower than 20 (■)





linotec AP

LINOTEC trim and stair nosing profiles are designed for thin floor coverings such as carpeting and vinyl at thicknesses ranging from 2 to 3mm. They neatly trim the flooring while hiding and protecting edge imperfections.



AP17ASN

Length: 2,70 meters

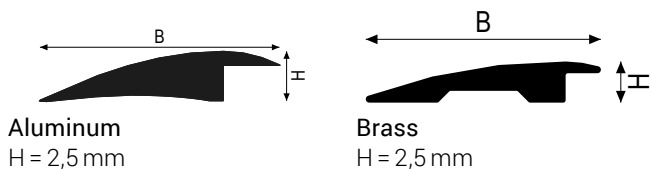

It is recommended to use FIXXTEC multipurpose adhesive to bond the product. For further information, see page 368.

Aluminum



AS

linotec >> AP in Anodized Aluminum - Self-Adhesive				
Item	B mm	Finish		pcs
AP17ASA270	17	AS - Silver		40*

linotec >> AP in Anodized Aluminum - not Adhesive				
Item	B mm	Finish		pcs
AP17ASN270	17	AS - Silver		80**

Brass



OL

linotec >> AP in Polished Brass - Self-Adhesive				
Item	B mm	Finish		pcs
AP19OLA270	19	OL - Polished		20*

linotec >> AP in Polished Brass - not Adhesive				
Item	B mm	Finish		pcs
AP19OLN270	19	OL - Polished		10**


* 10% increase for quantities lower than 20.

** 10% increase for quantities lower than those indicated.




linotec AV

LINOTEC trim and stair nosing profiles are designed for thin floor coverings such as carpeting and vinyl at thicknesses ranging from 2 to 3mm. They neatly trim the flooring while hiding and protecting edge imperfections.

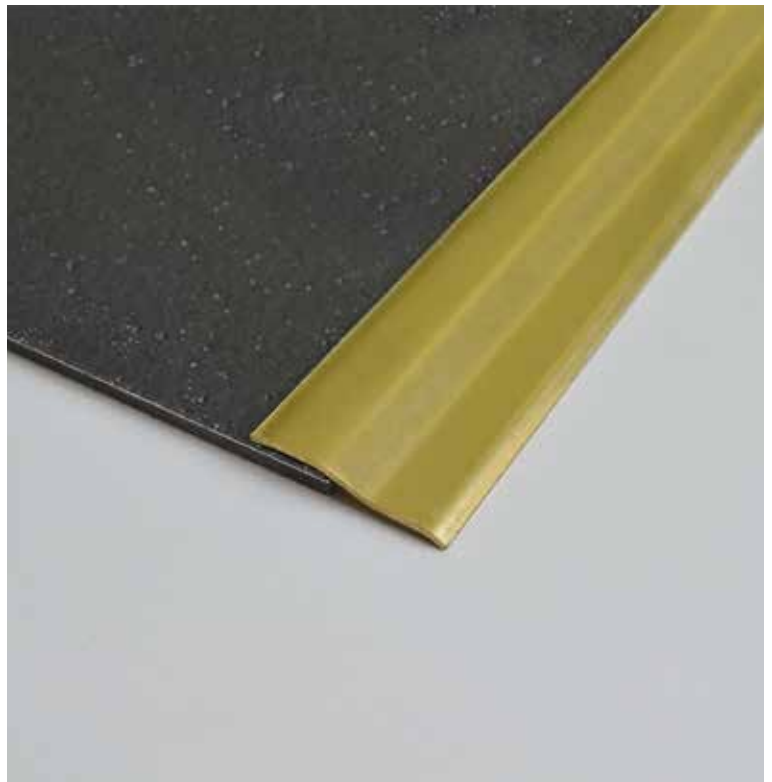

AV300LN

Length: 2,70 meters



Brass
H = 3 mm

H for thicknesses from 2 to 3 mm
It is recommended to use FIXXTEC multipurpose adhesive to bond the product. For further information, see page 368.

 **SELFLINE**/KIT PRE-CUT

Brass



OL

linotec >> AV in Polished Brass - Self-Adhesive					
Item	B mm	Finish		pcs	
AV300LA270	30	OL - Polished		20*	

linotec >> AV in Polished Brass - not Adhesive					
Item	B mm	Finish		pcs	
AV300LN270	30	OL - Polished		20*	

* 10% increase for quantities lower than 20.

** 10% increase for quantities lower than those indicated.




stairtec FVT

Technical and design profiles for edge protection and termination of steps of thin tile. They protect the edge of the steps from mechanical impact that could compromise the tightness of the materials that make up the tread and riser of the step. The FVT stair nosing is designed to be applied prior to the installation of the tile; the clean shape makes it minimalist and modern.



FVT30ASF

Length: 2,70 meters




Aluminum
B = 4,5 mm

Aluminum



AS



stairtec >> FVT in Anodized Aluminum					
Item	H mm	Finish		pcs	
FVT30ASF270	3	AS - Silver		30*	

* 10% increase for quantities lower than 20.
** 10% increase for quantities lower than those indicated.




stairtec SVT

ROUNDJOLLY and SQUAREJOLLY SJM profiles are symmetrically shaped stair nosing for thin tile installations, protecting the edge from mechanical impact. The ROUNDJOLLY profile gives the step a symmetrically rounded edge, while the SQUAREJOLLY SJM profile gives the step a square finish. Both are recommended for residential and commercial applications.




SVT50AS

Length: 2,70 meters




Aluminum
B = 16 mm



Aluminum



AS



stairtec >> SVT in Anodized Aluminum					
Item	H mm	Finish		pcs	
SVT50AS270	5	AS - Silver		40*	

* 10% increase for quantities lower than 20.
** 10% increase for quantities lower than those indicated.