




An interpretation of:
Rublyovo - Arkhangelskoye smart city, Zaha Hadid, MOSCOW (Russia)

PROFILES FOR FLOORS

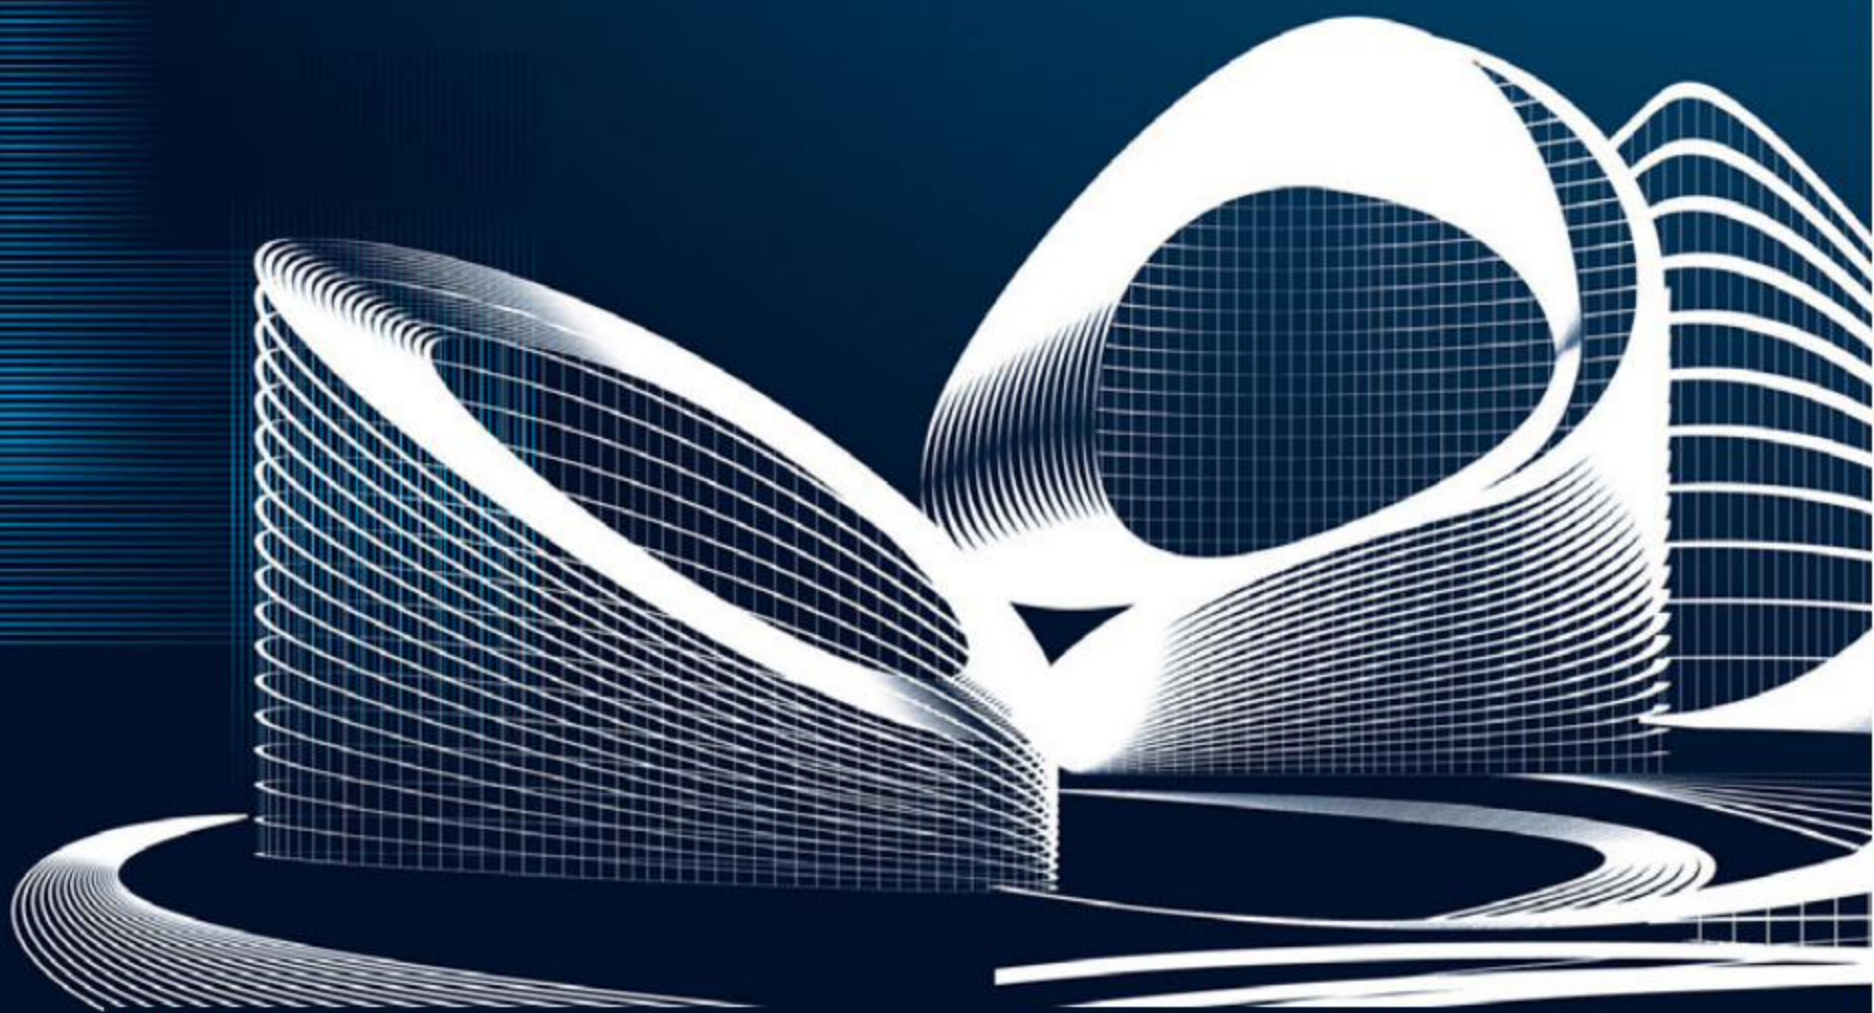


PROTERMINAL

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROTERMINAL is a professional edging profile used mainly to join similar or different floor materials (e.g. tiles/tiles - tiles/parquet/marble/laminates/carpeting/linoleum, etc.) of differing thickness.

PROTERMINAL in stainless steel is also used to protect steps and decking, as a floor edging profile and skirting covering. Match with PROLISTEL strips in stainless steel AISI 304/1.4301-V2A with polished or brushed and in aluminium with anodized or polished chrome finish.

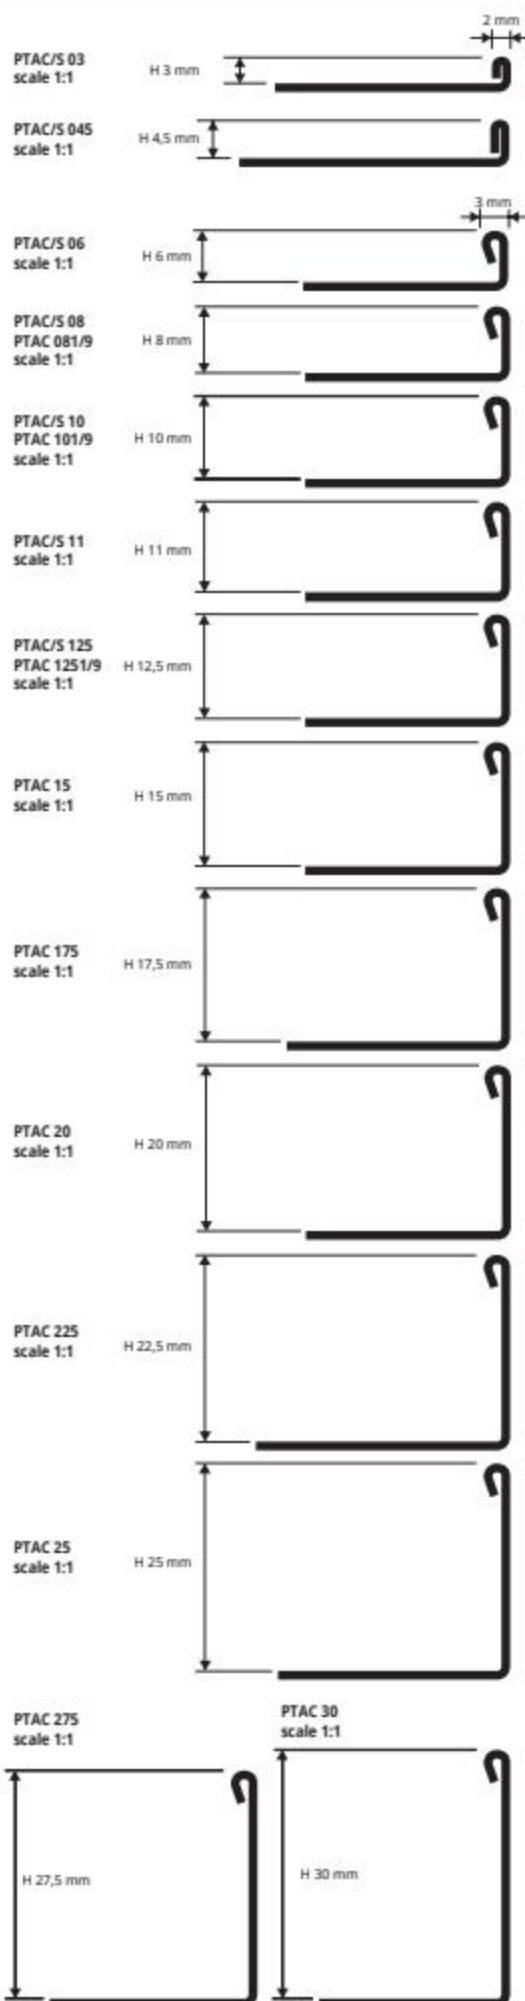

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm
(H 15 to H 30 mm - pack. 20 Pcs - 54 lm)


Article	H mm	€/lm	€/Pc
PTAC 03	3	8,95	24,17
PTAC 045	4,5	9,12	24,62
PTAC 06	6	9,51	25,68
PTAC 08	8	9,84	26,57
PTAC 10	10	10,35	27,95
PTAC 11	11	10,53	28,43
PTAC 125	12,5	10,73	28,97
PTAC 15	15	11,25	30,38
PTAC 175	17,5	11,89	32,10
PTAC 20	20	12,19	32,91
PTAC 225	22,5	12,96	34,99
PTAC 25	25	13,79	37,23
PTAC 275	27,5	14,31	38,64
PTAC 30	30	14,82	40,01



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm
(H 15 to H 30 mm - pack. 20 Pcs - 54 lm)

Article	H mm	€/lm	€/Pc
PTACS 03	3	10,72	28,94
PTACS 045	4,5	11,70	31,59
PTACS 06	6	12,10	32,67
PTACS 08	8	12,50	33,75
PTACS 10	10	12,96	34,99
PTACS 11	11	13,16	35,53
PTACS 125	12,5	13,42	36,23
PTACS 15	15	14,67	39,61
PTACS 20	20	15,00	40,50
PTACS 225	22,5	16,23	43,82
PTACS 25	25	17,27	46,63

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

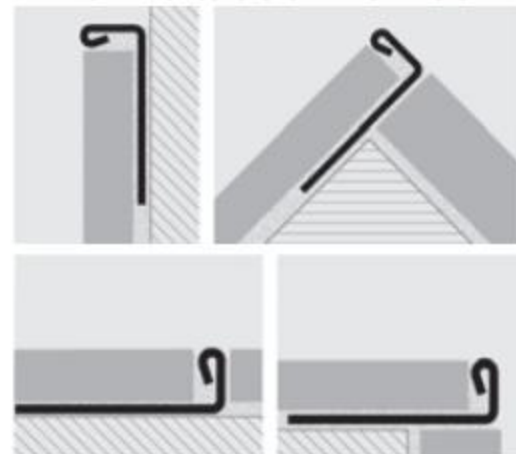

1. Choose the PROTERMINAL with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices.

COLOURS



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.



PROTERMINAL are manufactured with the same forms and sections, as well as in the very resistant material, the stainless shiny steel 316/1.4401-V4A, suitable for outdoors and marine environment with much presence of saltiness and considerable atmospheric agents. They are used as protection for the external angles of tiles, in order to separate or to create the separating joints in the pavements, to terminate the finishing of wall coverings, for platforms, stair steps, bathtubs, etc. They guarantee the impeccable work, ensuring considerable aesthetic effect as well. They strengthen the tile edge and prevents from chipping and breakages. Required by new European regulations on safety and accident prevention in public and private places.

PROTERMINAL

POLISHED STAINLESS STEEL
AISI 316/1.4404-V4A




POLISHED STAINLESS ST. AISI 316L/1.4404-V4A
with protective film
bar length 2,7 lm - pack 40 Pcs - 108 lm - 10/10 mm



Article	H mm	€/lm	€/Pc
PTACM 06	6	12,75	34,43
PTACM 08	8	13,18	35,59
PTACM 10	10	13,86	37,42
PTACM 125	12,5	14,36	38,77
PTACM 20	20	16,32	44,06

EXAMPLES OF LAYING

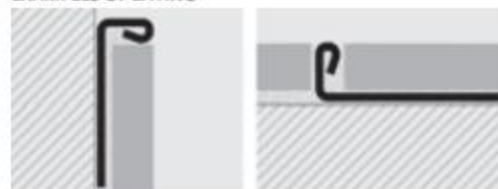


COLOURS



ACM - Polished stainless steel
AISI 316L

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

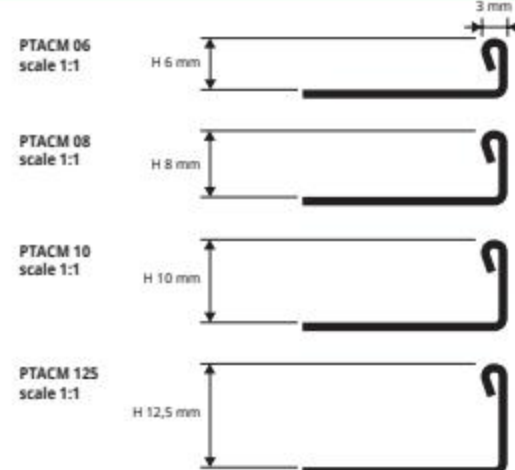

PROTERMINAL is a professional edging profile used mainly to join similar or different floor materials (e.g. tiles/tiles - tiles/parquet/marble/granite, etc.) of differing thickness.
PROTERMINAL in brass is also used to protect steps and decking, as a floor edging profile, to cover skirting, decking and worktops and to frame doormats.

PROTERMINAL

POLISHED, NATURAL, ANTIQUE BRASS,
BRUSHED AND CHROMED BRASS



POLISHED BRASS thermo packed
bar length 2,70 lm - pack 20 Pcs 54 lm

Article	H mm	€/lm	€/Pc
PTOL 06	6	12,32	33,26
PTOL 08	8	13,03	35,18
PTOL 10	10	14,04	37,91
PTOL 125	12,5	15,17	40,96
PTOL 15	15	16,29	43,98
PTOL 20	20	19,22	51,89
PTOL 25	25	24,45	66,02


ANTIQUÉ BRASS thermo packed
bar length 2,70 lm - pack 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PTOB 06	6	30,16	81,43
PTOB 08	8	31,47	84,97
PTOB 10	10	34,32	92,66
PTOB 125	12,5	37,01	99,93
PTOB 15	15	42,23	114,02
PTOB 20	20	49,07	132,49
PTOB 25	25	56,92	153,68


BRUSHED BRASS thermo packed
bar length 2,70 lm - pack 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PTOS 06	6	12,32	33,26
PTOS 08	8	13,03	35,18
PTOS 10	10	14,04	37,91
PTOS 125	12,5	15,17	40,96
PTOS 15	15	16,29	43,98
PTOS 20	20	19,22	51,89
PTOS 25	25	24,45	66,02

COLOURS

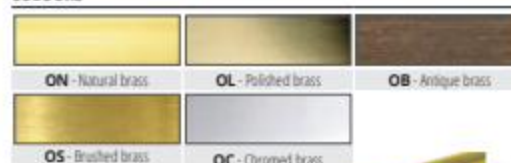

Curve version is also available

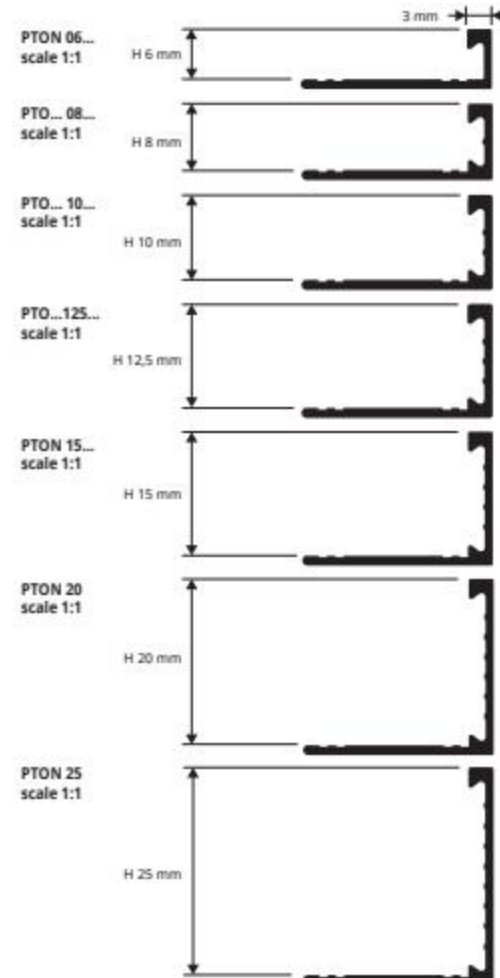

1. Choose the "PROTERMINAL" with the same height as the thickness of the floor/wall covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



PROTERMINAL

NATURAL ALUMINIUM AND
ANODIZED SILVER ALUMINIUM

PROTERMINAL is a professional edging profile designed to protect and decorate the outside corners of tile, mosaic and marble coverings of differing thickness.

PROTERMINAL in aluminium is also used to join different floor materials and to protect steps and decking. Excellent as the edging trim skirtings and for bathroom and kitchen wall coverings. Match with PROLISTEL ALL strips in anodized aluminium with silver and polished chrome finish and with PROLISTEL ACC strips in AISI 304-1.4301 stainless steel with polished or brushed.

PT... 03
scale 1:1

H 3 mm details
at page 40



PT... 045
scale 1:1

H 4,5 mm details
at page 40



PT... 06
scale 1:1

H 6 mm



PT... 08
scale 1:1

H 8 mm



PT... 10
scale 1:1

H 10 mm



PT... 11
scale 1:1

H 11 mm



PT... 125
scale 1:1

H 12,5 mm



PT... 15
scale 1:1

H 15 mm



PT... 20
scale 1:1

H 20 mm



PTAN 25
scale 1:1

H 25 mm



NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 2,70 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTAN 03	3	3,09	8,34
PTAN 045	4,5	3,14	8,48
PTAN 06	6	3,17	8,56
PTAN 08	8	3,31	8,94
PTAN 10	10	3,46	9,34
PTAN 11	11	3,56	9,61
PTAN 125	12,5	3,66	9,88
PTAN 15	15	4,02	10,85
PTAN 20	20	4,70	12,69
PTAN 25	25	5,50	14,85

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,70 lm - pack. 40 Pcs - 108 lm


Article	H mm	€/lm	€/Pc
PTAA 03	3	3,90	10,53
PTAA 045	4,5	4,08	11,02
PTAA 06	6	4,23	11,42
PTAA 08	8	4,29	11,58
PTAA 10	10	4,56	12,31
PTAA 11	11	4,97	13,42
PTAA 125	12,5	5,24	14,15
PTAA 15	15	5,57	15,04
PTAA 20	20	6,51	17,58

COLOURS




Also available Polished version and curve version

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

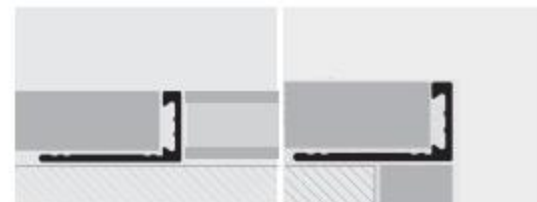

1. Choose the "PROTERMINAL" with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices.

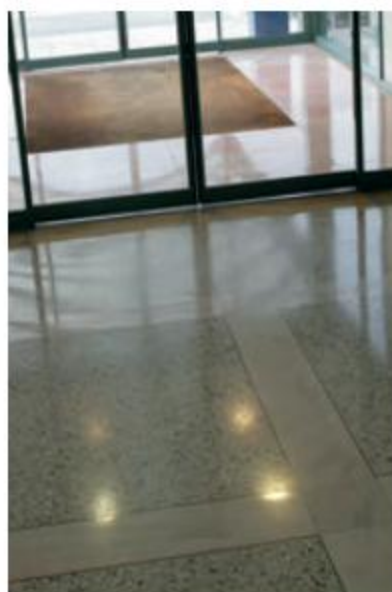

PROLEVIGAL are separating profiles used to create the technical joint in the special types of pavements such as marble- Venice- palladium ones, that must be smoothed after their laying process. The particular "L" shape with the cut/drilled base and 2,5 mm thick vertical edge consent the perfect smoothing and constant thickness as well. Available in natural aluminium and natural brass, various thickness, as well in outlined/bent **PROLEVIGAL CURVES** BRASS versions.


PROLEVIGAL

BRASS



NATURAL BRASS thermo packed 10 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PLGON 08	8	10,88	29,38
PLGON 10	10	11,33	30,59
PLGON 125	12,5	12,10	32,67
PLGON 125/5	12,5	23,46	63,42
PLGON 15	15	13,15	35,51
PLGON 175	17,5	14,09	38,04
PLGON 20	20	15,47	41,77
PLGON 30	30	18,83	50,84

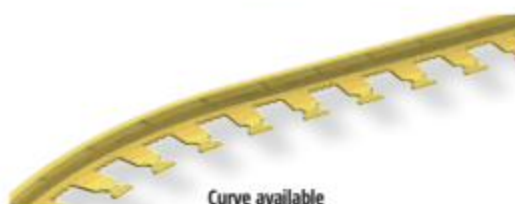


Curve available

+30 % ON GROSS PRICES FOR CURVE VERSION.
ADD **CV** AFTER THE ARTICLE CODE.
E.g.: PLGON 08 (CURVE) PLGON**CV** 08

COLOURS



ON - Natural brass

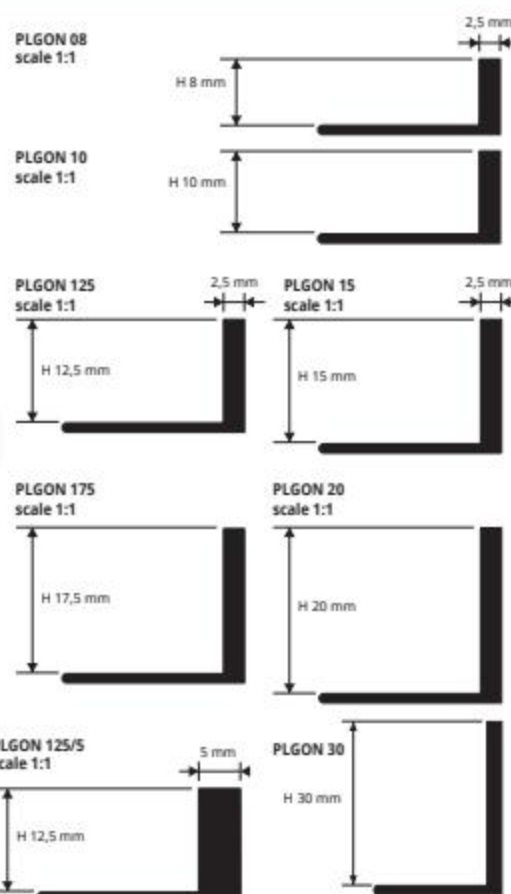

PROLEVIGAL are separating profiles used to create the technical joint in the special types of pavements such as marble- Venice- palladium ones, that must be smoothed after their laying process. The particular "L" shape with the cut/drilled base and 2,5 mm thick vertical edge consent the perfect smoothing and constant thickness as well. Available in natural aluminium and natural brass, various thickness, as well in outlined/bent **PROLEVIGAL CURVE** AL versions.

PROLEVIGAL

NATURAL ALUMINIUM



NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLGAN 045	4,5	2,77	7,48
PLGAN 06	6	3,03	8,18
PLGAN 08	8	3,38	9,13
PLGAN 10	10	3,44	9,29
PLGAN 125	12,5	3,77	10,18
PLGAN 15	15	4,16	11,23
PLGAN 175	17,5	4,61	12,45
PLGAN 20	20	4,82	13,01




Curve available

+30 % ON GROSS PRICES FOR CURVE VERSION.
ADD **CV** AFTER THE ARTICLE CODE.
E.g.: PLGAN 08 (CURVES) PLGAN**CV** 08

COLOURS




AN - Natural alum.

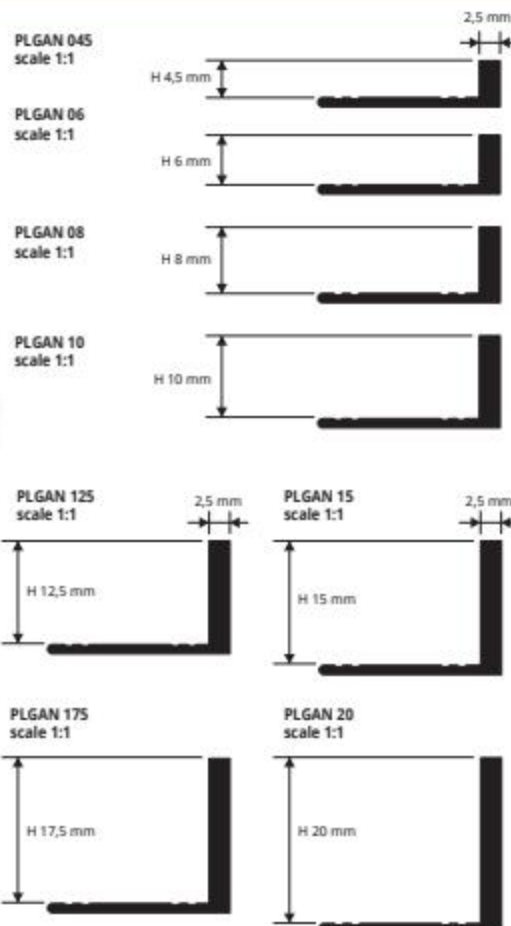


PROELEGANT

NATURAL, POLISHED
AND CHROMED BRASS

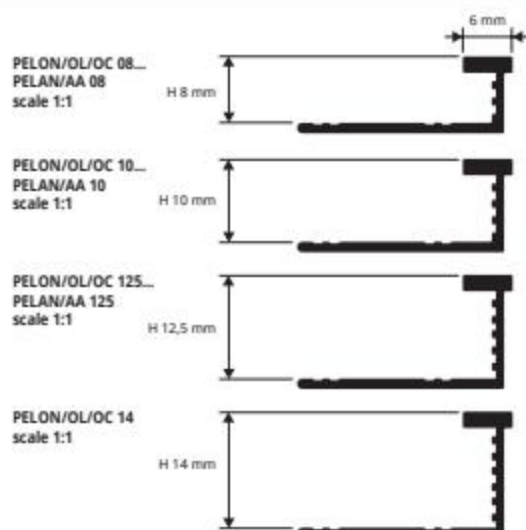

PROELEGANT is a refined profile, with 6 mm visible surface, designed to cover the joint between two types of floor covering, tiles - parquet, marble or granite, bestowing a prestige aesthetic effect that is ideal for indoor and outdoor finishes, even when subject to considerable loads. **PROELEGANT** is available in polished, natural and chromed brass. It is available in various heights in order to satisfy all technical, practical and, in particular, decorative requirements. The chromed version may be used as a decorative strip in the wall covering.

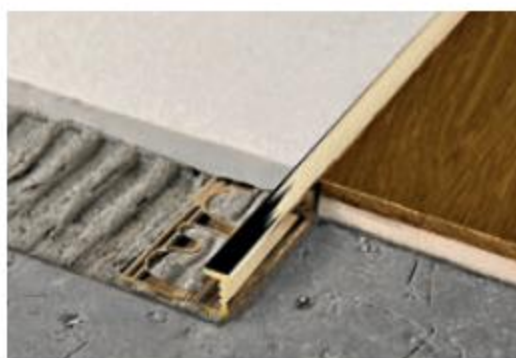

POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm	€/lm	€/Pc
PELOL 08	8	18,09	48,84
PELOL 10	10	18,56	50,11
PELOL 125	12,5	19,27	52,03
PELOL 14	14	19,93	53,81



CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PELOC 08	8	22,78	61,51
PELOC 10	10	23,26	62,80
PELOC 125	12,5	23,92	64,58
PELOC 14	14	24,50	66,15

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

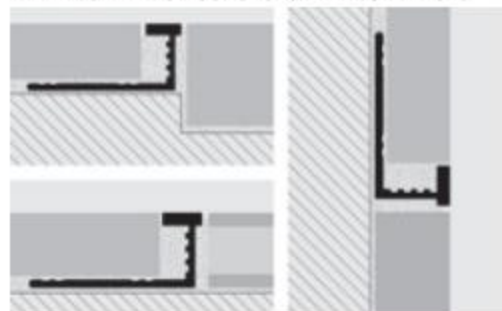

1. Choose the "PROELEGANT" with the same height as the thickness of the wall covering/floor. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

NATURAL BRASS thermo packed 10 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PELON 08	8	13,85	37,40
PELON 10	10	15,05	40,64
PELON 125	12,5	15,29	41,28
PELON 14	14	16,54	44,66

COLOURS

OC - Chromed brass	OL - Polished brass	ON - Natural brass

PROELEGANT

NATURAL ALUMINIUM AND
ANODIZED ALUMINIUM

EXAMPLES OF LAYING (for instructions see the product above)



NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PELAN 08	8	5,40	14,58
PELAN 10	10	5,74	15,50
PELAN 125	12,5	6,09	16,44

COLOURS

AN - Natural alum.	AA - Anodized silver alum.	AT - Anodized titanium
NEO - Anodized black		




ANODIZED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PELAA 08	8	6,77	18,28
PELAA 10	10	7,12	19,22
PELAT 10	10	8,51	22,98
PELNEO 10	10	8,97	24,22
PELAA 125	12,5	7,48	20,20
PELAT 125	12,5	8,68	23,44
PELNEO 125	12,5	9,57	25,84



Curve available, see page 103

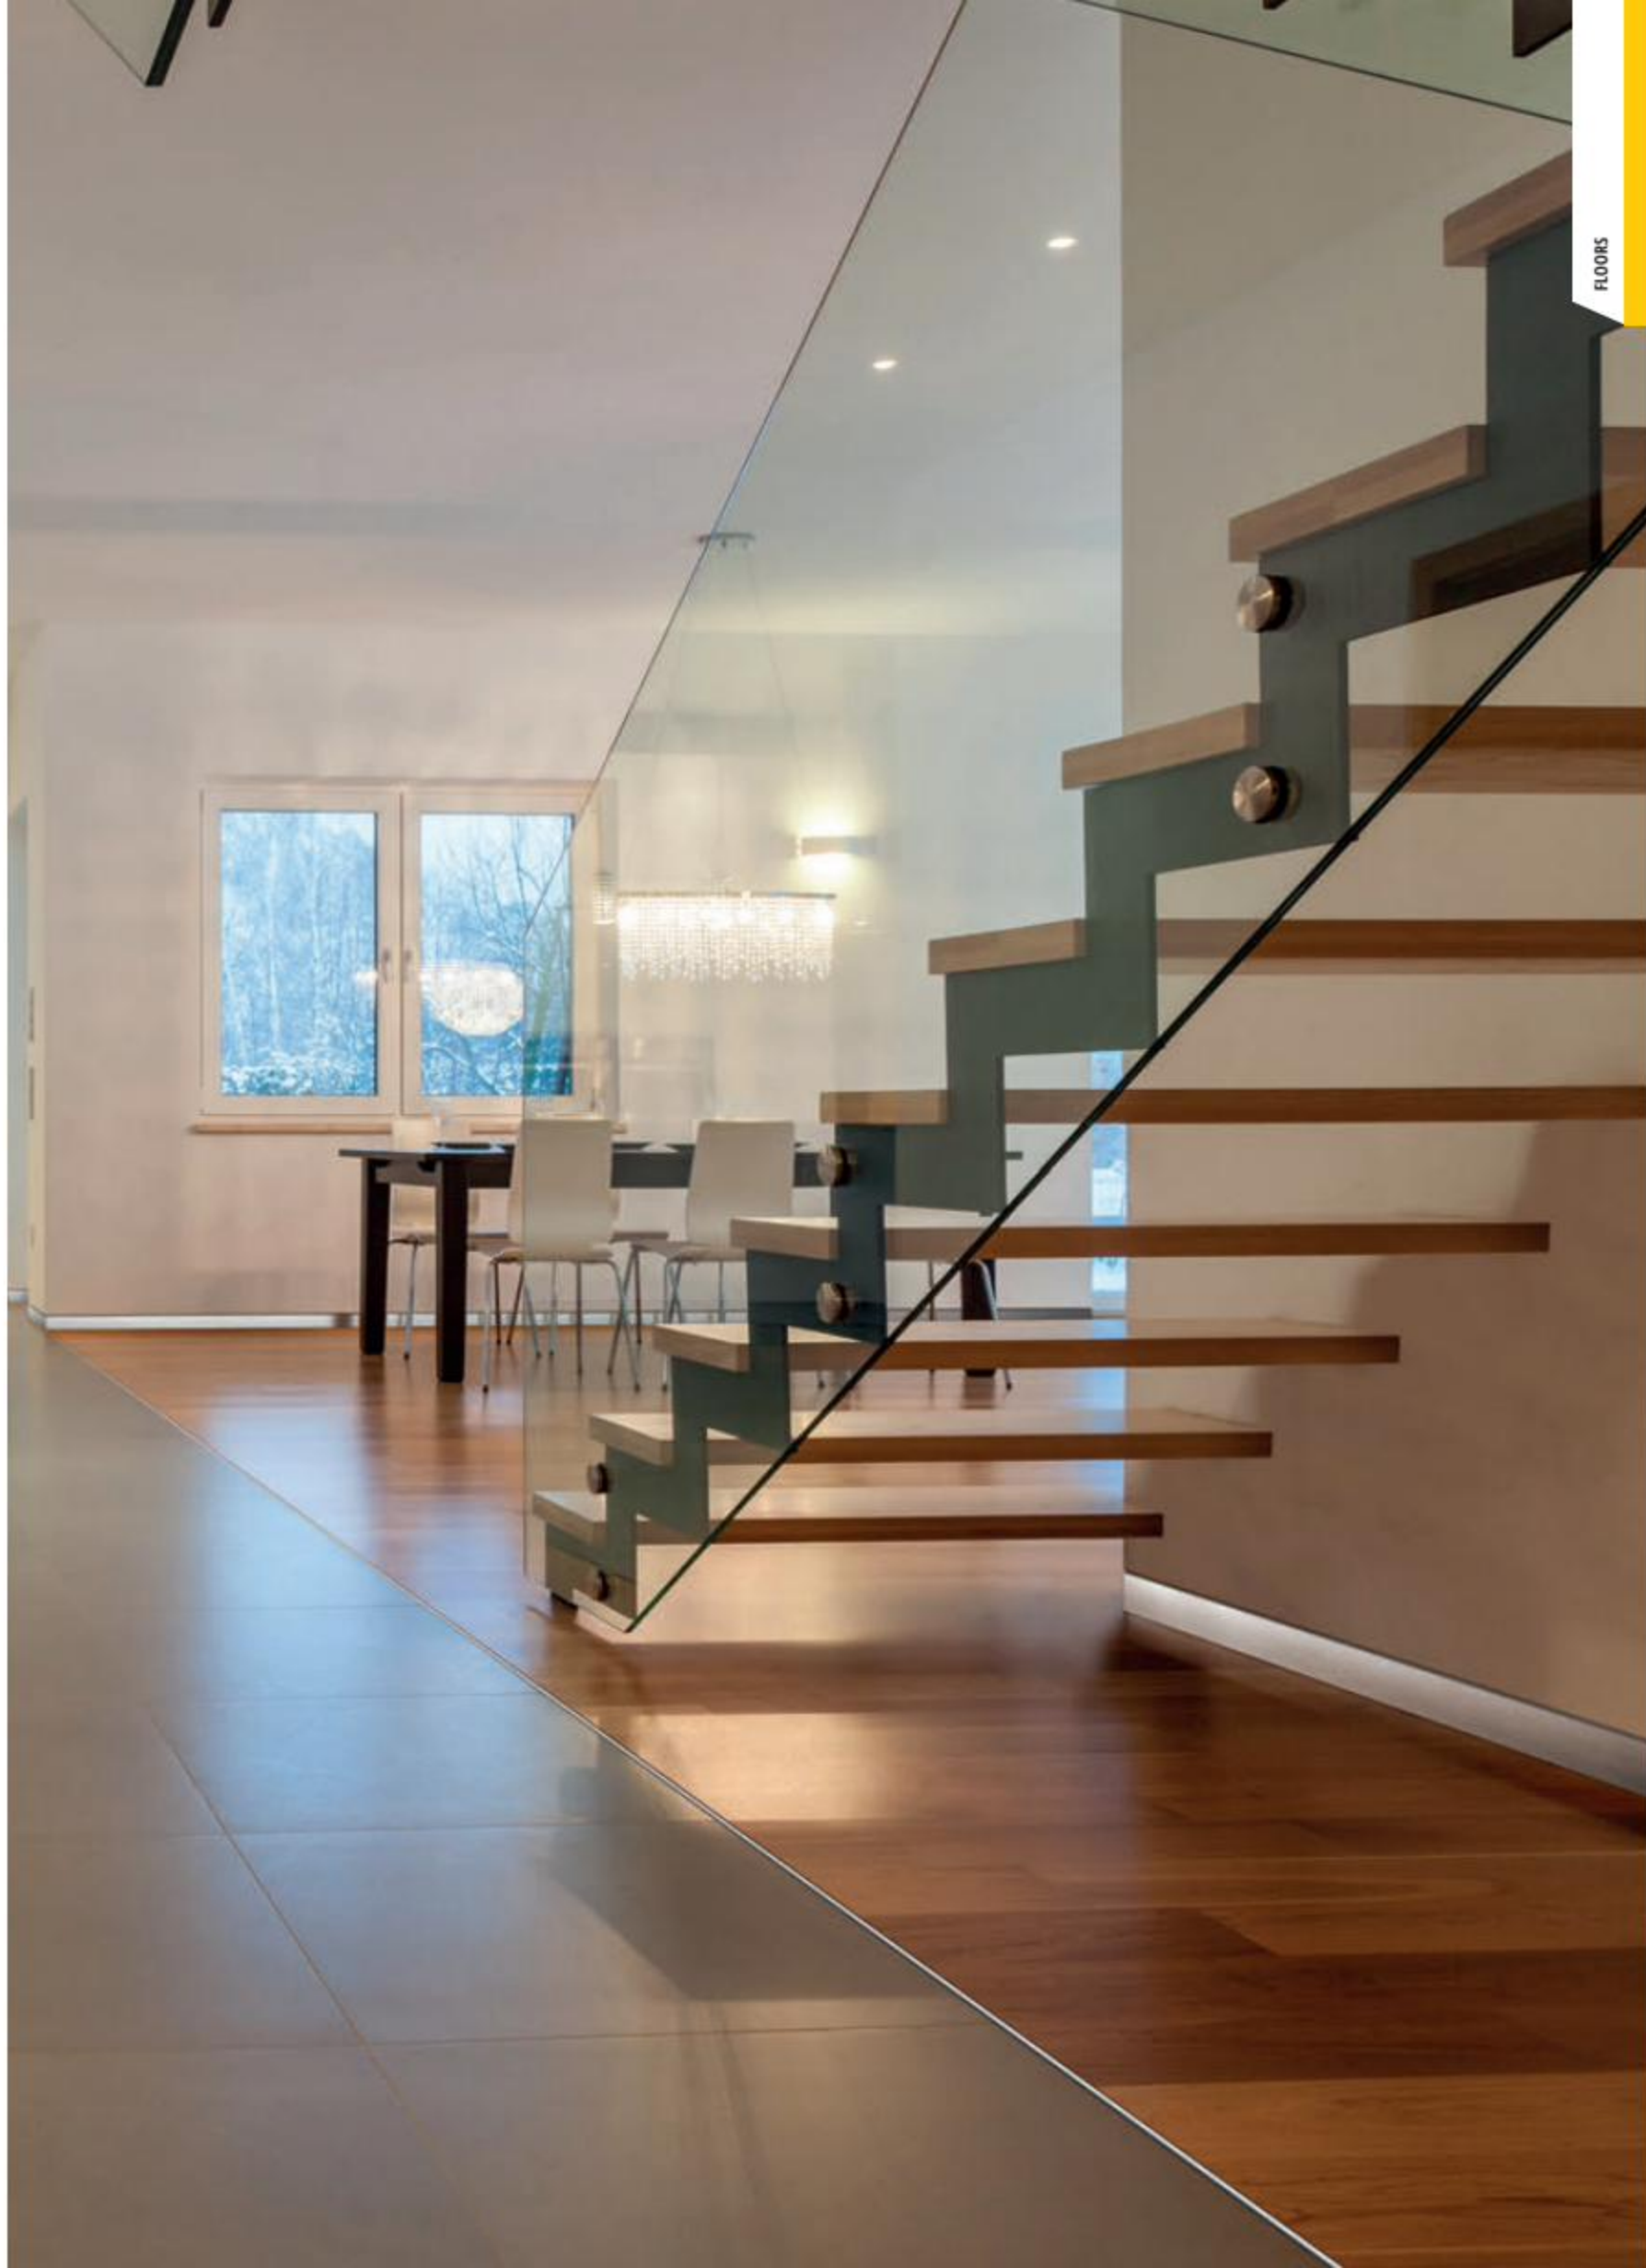

PROFINAL

POLISHED, BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROFINAL is a profile in stainless steel AISI 304/1.4301-V2A polished, brushed. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.

PRFAC... 08
scale 1:1




PRFAC... 10
scale 1:1



PRFAC... 125
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

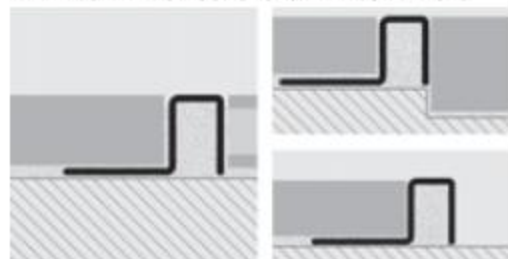

1. Choose the "PROFINAL" with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PRFAC 08	8	13,73	37,07
PRFAC 10	10	14,44	38,99
PRFAC 125	12,5	15,65	42,26

COLOURS



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar
length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PRFACS 08	8	15,00	40,50
PRFACS 10	10	15,66	42,28
PRFACS 125	12,5	16,51	44,58

PROFINAL

NATURAL, POLISHED,
CHROMED AND ANTIQUE BRASS

PROFINAL is a profile in natural, polished, chromed and antique brass. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.

PRFO... 08
scale 1:1



PRFO... 10
scale 1:1



PRFO... 11
scale 1:1



PRFO... 125
scale 1:1



PRFOC 15
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



NATURAL BRASS thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRFON 08	8	14,94	40,34
PRFON 10	10	17,37	46,90
PRFON 125	12,5	19,16	51,73
PRFON 15	15	21,64	58,43

COLOURS



POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRFOL 08	8	18,85	50,90
PRFOL 10	10	20,12	54,32
PRFOL 125	12,5	21,41	57,81

CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 15 mm - 40,5 lm)

Article	H mm	€/lm	€/Pc
PRFOC 08	8	24,03	64,88
PRFOC 10	10	26,47	71,47
PRFOC 11	11	27,78	75,01
PRFOC 125	12,5	28,68	77,44
PRFOC 15	15	30,27	81,73

ANTIQUÉ BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRFOB 08	8	39,86	107,62
PRFOB 10	10	43,30	116,91
PRFOB 125	12,5	46,40	125,28

PROFINAL is a profile in natural and anodized silver aluminium. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.

PROFINAL

NATURAL ALUMINIUM AND
ANODIZED SILVER ALUMINIUM




NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PRFAN 10	10	5,93	16,01
PRFAN 125	12,5	6,28	16,96

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PRFAA 10	10	7,66	20,68
PRFAA 125	12,5	8,01	21,63

COLOURS

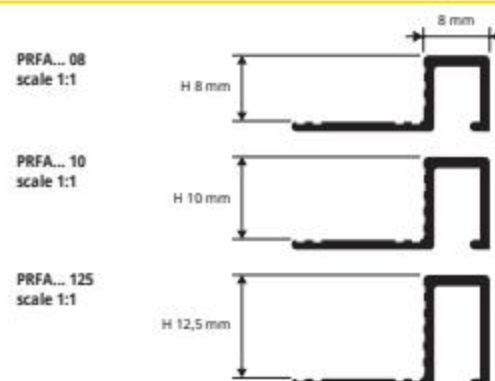

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROFINAL" with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

PROSQUARE


NATURAL BRASS




NATURAL BRASS
bar length 3 lm - pack. 20 Pcs - 60 lm

Article	L x H mm	€/lm	€/Pc
PQEON 108	10 X 8	24,32	72,96

COLOURS



PQEON 108
scale 1:1



PROANGLE

CHROMED, POLISHED BRASS




CHROMED, POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PGAOC 10 : 27 lm)

Article	L x H mm	€/lm	€/Pc
PGAOC 10	10 X 10	29,19	78,81
PGAOL 10	10 X 10	23,45	63,32

COLOURS




PGAOL/OC 10
scale 1:1



PROJOINT

NATURAL, CHROMED AND POLISHED BRASS

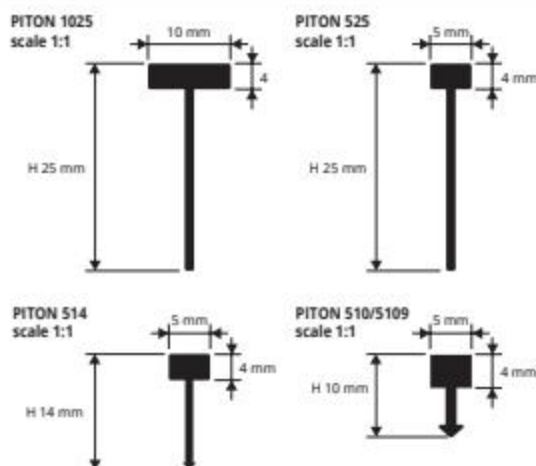

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROJOINT" according to the desired height.
2. Cut "PROJOINT" to the desired length.

Mortar laying

3. Cut with a trowel the fresh screed following the floor edges.
4. Apply the profile inside the fresh screed taking care to align it with the surface of the floor. After laying the joint should be 0,5 mm below the floor covering surface.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.

Adhesive laying

3. Apply the adhesive on the support where the profile will be laid. After laying the joint should be 0,5 mm below the floor covering surface.
4. Lay the tiles aligning them with the profile leaving a 2 mm joint. Remove immediately all the remains of adhesive from the profile surface.
5. Fill the joints between the profile and the tile with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.

PROJOINT is a brass profile for joining two floors at the same level. It can be laid with mortar or glue/adhesive. The head thickness allows perfect smoothing and sanding of over 3 mm. It is usually used for tile-wood-marble-Venetian-Palladian floors. Available in various heights and widths. The vertical arrowhead in the PIT 510 and PIT 514 version allows excellent anchorage with the adhesive.



POLISHABLE NATURAL BRASS

bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PITON 1025	10 X 25	18,36	49,57
PITON 525	5 X 25	9,84	26,57
PITON 514	5 X 14	9,41	25,41
PITON 510	5 X 10	8,33	22,49

POLISHED BRASS

bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PITON 514	5 X 14	12,70	34,29
PITON 510	5 X 10	11,24	30,35

CHROMED BRASS

bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PITON 510	5 X 10	13,82	37,31



POLISHABLE NATURAL BRASS

bar length 0,90 lm - pack 40 Pcs

Article	L x H mm	€/lm	€/Pc
PITON 5109	5 X 10	/	18,10

CONSISTING OF 1 ECOBLISTER WITH 2 PCS. OF 0.90 LM

POLISHED BRASS

bar length 0,90 lm - pack 40 Pcs

Article	L x H mm	€/lm	€/Pc
PITON 5109	5 X 10	/	24,44


CONSISTING OF 1 ECOBLISTER WITH 2 PCS. OF 0.90 LM

COLOURS


ON - Natural brass	OL - Polished brass	OC - Chromed brass

PROJOINT

NATURAL ALUMINIUM

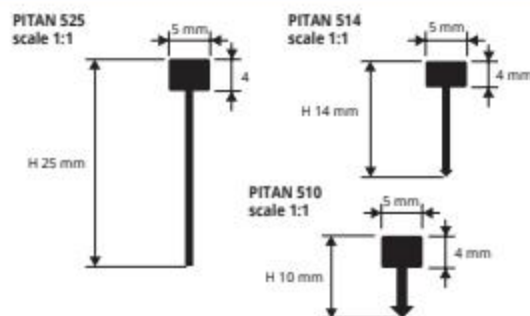

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

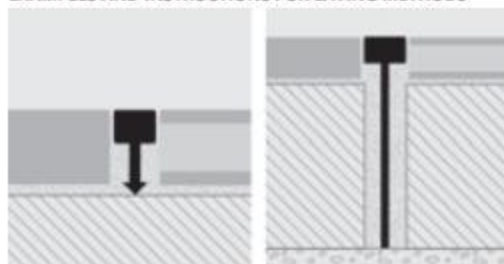

PROJOINT is a natural aluminium profile for joining two floors at the same level. It can be laid with mortar or glue/adhesive. The head thickness allows perfect smoothing and sanding of over 3 mm. It is usually used for tile-wood-marble-Venetian-Palladian floors. Available in various heights and widths. The vertical arrowhead in the PIT 510 and PIT 514 version allows excellent anchorage with the adhesive.



1. Choose "PROJOINT" according to the desired height.
2. Cut "PROJOINT" to the desired length.

Mortar laying

3. Cut with a trowel the fresh screed following the floor edges.
4. Apply the profile inside the fresh screed taking care to align it with the surface of the floor. After laying the joint should be 0,5 mm below the floor covering surface.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.

Adhesive laying

3. Apply the adhesive on the support where the profile will be laid. After laying the joint should be 0,5 mm below the floor covering surface.
4. Lay the tiles aligning them with the profile leaving a 2 mm joint. Remove immediately all the remains of adhesive from the profile surface.
5. Fill the joints between the profile and the tile with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.



NATURAL ALUMINIUM

bar length 2,70 lm - pack 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PITAN 525	5 X 25	3,79	10,23
PITAN 514	5 X 14	3,46	9,34
PITAN 510	5 X 10	2,84	7,67
PITAN 5109	5X10	3,33	3,33

COLOURS

AN - Natural alum.

PROCANAL is a channel for joining floors and also for use as strips in wall coverings. This profile is made in natural, polished and chromed brass as well as natural or anodized silver aluminium. It is also used as a cable channel for the insertion of wires and conduits in all types of floor.

PROCANAL

NATURAL, POLISHED,
CHROMED, ANTIQUE AND BRUSHED BRASS
NATURAL AND ANODIZED SILVER ALUMINIUM



NATURAL BRASS thermo packed 10 Pcs - POLISHED, CHROMED,
NATURAL, ANTIQUE AND BRUSHED BRASS thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm (PCLOC 10 - 81 lm)

Article	L x H mm	€/lm	€/Pc
PCLON 10	10 X 10	14,28	38,56
PCLOL 10	10 X 10	16,18	43,69
PCLOC 10	10 X 10	23,02	62,15
PCLOB 10	10 X 10	38,31	103,44
PCLOS 10	10 X 10	16,18	43,69



NATURAL ALUMINIUM thermo packed 10 Pcs
ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PCLAN 10	10 X 10	3,13	8,45
PCLAA 10	10 X 10	4,17	11,26

Available Stainless steel AISI 304/1.4301-V2A
"PROLISTEL" 10x10 PLTAC 10 / PLTACS 10

COLOURS

ON - Natural brass	OL - Polished brass	OC - Chromed brass
OB - Antique Brass	OS - Brushed brass	

COLOURS

AN - Natural alum.	AA - Anodized silver alum.

PROFLAT is a range of 20 and 40 mm natural brass or steel strips 3 mm thick. Ideal for dividing up flooring on the same level, they may be polished in situ and also curved/shaped to create decorative patterns that are particularly recommended for marble, Palladian, Venetian and cement or resin-based floors.

PROFLAT

STAINLESS STEEL AISI 304/1.4301-V2A
NATURAL BRASS



STAINLESS STEEL AISI 304/1.4301-V2A
bar length 2 lm - pack. 20 Pcs - 40 lm

Article	L x H mm	€/lm	€/Pc
GPLAC 2032	3 X 20	12,36	24,72

STAINLESS STEEL AISI 304/1.4301-V2A BRUSHED
bar length 2 lm - pack. 20 Pcs - 40 lm

Article	L x H mm	€/lm	€/Pc
GPLACS 2032	3 X 20	14,32	28,64
GPLACS 5052	5 X 50	46,8	93,6



POLISHABLE NATURAL BRASS
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm


Article	L x H mm	€/lm	€/Pc
GPLON 2025	2,5 X 20	15,25	41,18
GPLON 4025	2,5 X 40	20,26	54,70

COLOURS

AC - Stainless steel AISI 304/1.4301-V2A	ON - Natural brass	ACS - Brushed stainless steel AISI 304/1.4301-V2A

1. Choose "PROFLAT" according to the desired height and visible surface. 2. Cut "PROFLAT" to the desired length. 3. Cut with a trowel the fresh screed following the floor edges. 4. Apply the profile inside the fresh screed taking care to align it with the surface of the floor. After laying the joint should be 0,5 mm below the floor covering surface. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.

PCL... 10
scale 1:1




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the profile in the required material and finish. 2. Apply the adhesive onto the area of application. 3. Lay the "PROCANAL". 4. Continue laying by aligning it "flush" with the covering. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.


GPLAC 203... / 205...
scale 1:1




GPLON 2025
scale 1:1



GPLAC 403... / 505...
scale 1:1



GPLON 4025
scale 1:1




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



PROSLIDER

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROSLIDER is a sloping terminal transition profile in stainless steel AISI 304/1.4301-V2A designed to join different height floors in a perfect, stepless way. This particularly sturdy profile with the bent base sloping inwards withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor. Available in AISI 304/1.4301-V2A stainless steel in various heights to accommodate all differences in level.

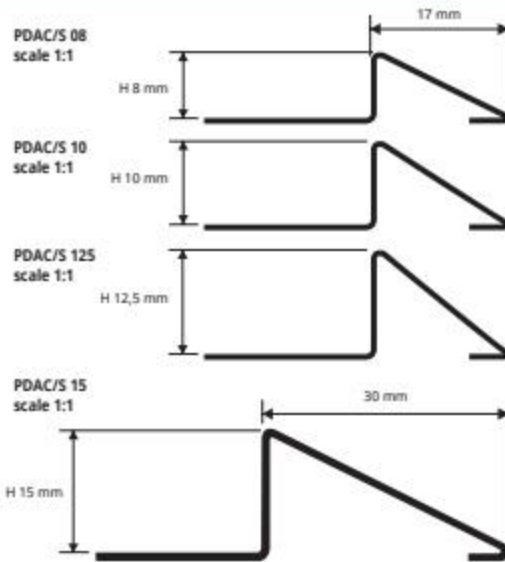

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PDAC 08	8	13,79	37,23
PDAC 10	10	14,91	40,26
PDAC 125	12,5	17,06	46,06
PDAC 15	15	21,32	57,56
PDAC 20	20	26,69	72,06



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PDACS 08	8	17,16	46,33
PDACS 10	10	18,16	49,03
PDACS 125	12,5	21,64	58,43
PDACS 15	15	23,00	62,10
PDACS 20	20	28,85	77,90

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the profile with the required height and finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the "PROSLIDER". 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices.


COLOURS



PROSLIDER

POLISHED AND NATURAL BRASS

PROSLIDER is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor. Available in natural and polished brass in various heights to accommodate all differences in level.

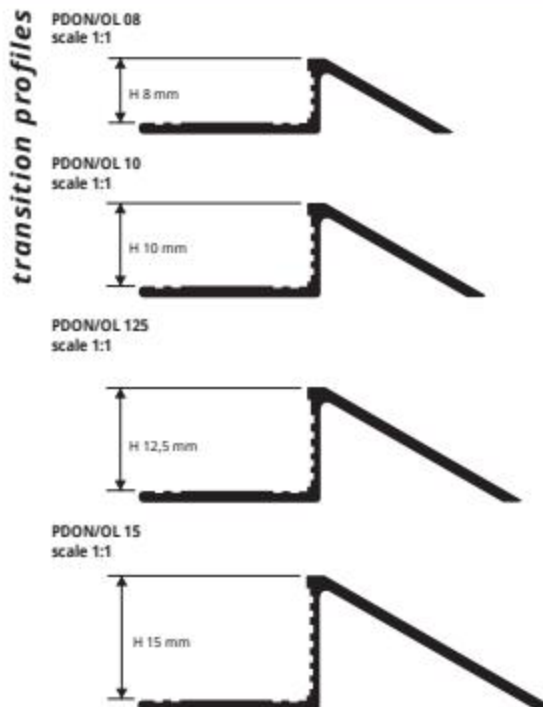

NATURAL BRASS thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PDON 08	8	15,41	41,61
PDON 10	10	17,69	47,76
PDON 125	12,5	22,09	59,64
PDON 15	15	26,99	72,87



POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PDOL 10	10	21,93	59,21

POLISHED BRASS thermo packed
bar length 0,90 lm - pack. 40 Pcs

Article	H mm	€/Pc
PDOL 109	10	24,12

EXAMPLES OF LAYING



INSTRUCTIONS FOR LAYING

1. Choose the profile with the required height H, material and finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the "PROSLIDER". 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices. Oxidation marks on profiles in natural and polished brass may be easily removed by polishing the profiles with specific products to be found on sale such as Sidal, Smac and similar.

COLOURS



PROSLIDER is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor.

Available in natural and anodized silver aluminium in various heights to accommodate all differences in level.

PROSLIDER


NATURAL ALUMINIUM AND
ANODIZED SILVER ALUMINIUM



NATURAL ALUMINIUM thermo packed 5 Pcs
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm	€/lm	€/Pc
PDAN 08	8	4,82	13,01
PDAN 10	10	5,46	14,74
PDAN 125	12,5	6,34	17,12

COLOURS



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PDAA 08	8	6,98	18,85
PDAA 10	10	7,48	20,20
PDAA 125	12,5	8,16	22,03

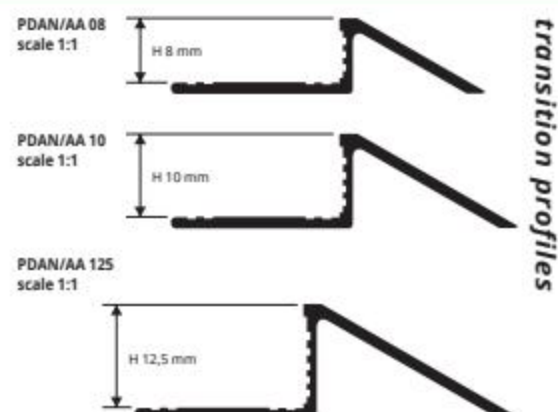

transition profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the profile with the required height H, material and finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the "PROSLIDER". 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices.

PROSLIDER LR is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER LR** is used in particular to join tile or wood to an existing floor.

Available in natural and anodized silver aluminium in various heights to accommodate all differences in level.

PROSLIDER LR

NATURAL ALUMINIUM AND
ANODIZED SILVER ALUMINIUM



NATURAL ALUMINIUM thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PDLRAN 10	10	13,87	37,45
PDLRAN 125	12,5	17,27	46,63
PDLRAN 15	15	19,83	53,54
PDLRAN 20	20	25,14	67,88

COLOURS




ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PDLRAA 10	10	18,10	48,87
PDLRAA 125	12,5	20,37	55,00
PDLRAA 15	15	23,41	63,21
PDLRAA 20	20	28,00	75,60


INSTRUCTIONS FOR LAYING

1. Choose the profile with the required height H, material and finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the "PROSLIDER LR". 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices.

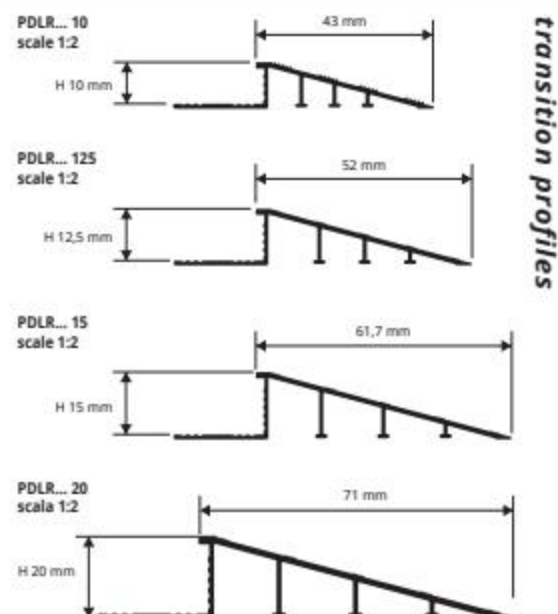

transition profiles

EXAMPLES OF LAYING

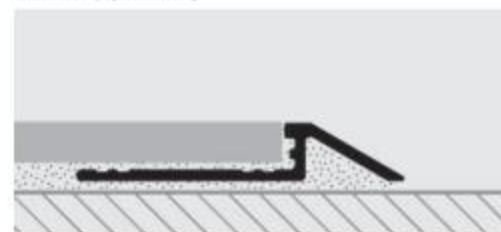



PROCARPET ACC is a profile in stainless steel 304/1.4301-V2A used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect join thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.

PROCARPET ACC

STAINLESS STEEL AISI 304/1.4301-V2A



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PRTAC 08	8	11,27	30,43
PRTAC 10	10	12,37	33,40



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm


Article	H mm	€/lm	€/Pc
PRTACS 08	8	14,08	38,02
PRTACS 10	10	15,45	41,72

COLOURS



INSTRUCTIONS FOR LAYING

1. Choose the "PROCARPET ACC" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

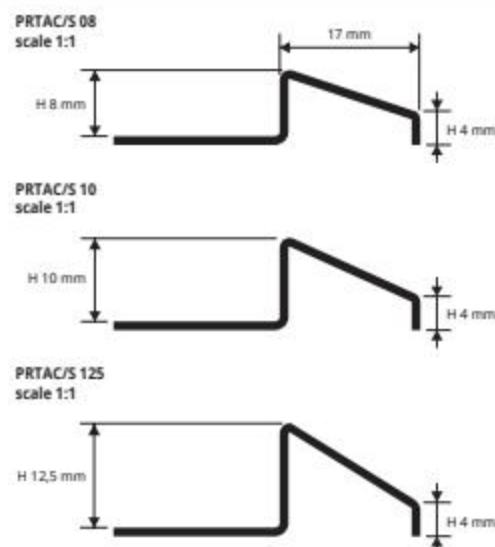

transition profiles

EXAMPLES OF LAYING



PROCARPET OTT is a profile in brass (natural or polished) used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect join thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.

PROCARPET OTT

POLISHED AND NATURAL BRASS



NATURAL BRASS thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRTON 10	10	19,14	51,68



POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm	€/lm	€/Pc
PRTOL 10	10	23,36	63,07

COLOURS



INSTRUCTIONS FOR LAYING

1. Choose the "PROCARPET OTT" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids. Profiles in natural or polished brass may be subject to oxidation in environments with high degrees of humidity. Resulting marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and.

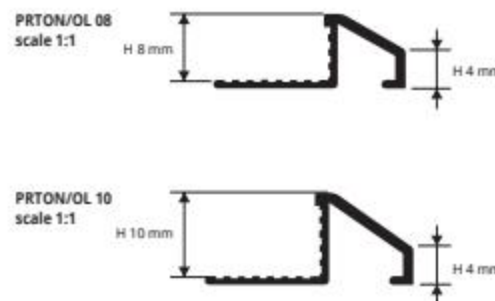

transition profiles

EXAMPLES OF LAYING



PROCARPET ALL

NATURAL AND ANODIZED
SILVER ALUMINIUM

PROCARPET ALL is a profile in aluminium (natural or silver anodized) used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect join thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.

transition profiles

PRTAN/AA 08
scale 1:1



PRTAN/AA 10
scale 1:1



PRTAN/AA 125
scale 1:1



EXAMPLES OF LAYING



NATURAL ALUMINIUM thermo packed 5 Pcs
bar length 2,70 lm - pack 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRTAN 08	8	4,95	13,37
PRTAN 10	10	5,58	15,07
PRTAN 125	12,5	6,43	17,36

INSTRUCTIONS FOR LAYING

1. Choose the "PROCARPET ALL" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,70 lm - pack 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PRTAA 08	8	5,81	15,69
PRTAA 10	10	6,83	18,44
PRTAA 125	12,5	8,09	21,84

COLOURS




PROSKID

POLISHED BRASS AND
ANODIZED SILVER ALUMINIUM

PROSKID is a brass and aluminum profile that allows to connect continuously and without steps two adjacent floors that are located on two different levels and protect the edges of the floor. PROSKID in brass and silver anodized aluminium is suitable for any environment where good resistance to mechanical and chemical stress is required.

transition profiles

PSLDOL 10/109/109AS
scale 1:1

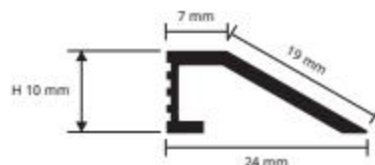

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROCARPET" taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.



POLISHED BRASS thermo packed
bar length 0,90 lm - pack 20 Pcs


Article	H mm	€/lm	€/Pc
PSLDOL 109AS	10	/	25,75



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,70 lm - pack 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PSLDAA 10	10	6,43	17,36

COLOURS





PROLEVALL 29 is a transition profile in anodized aluminium available in the self-adhesive or punched versions. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 4 and 6mm. **PROLEVALL 29** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 29

ANODIZED ALUMINIUM WITH
SELF-ADHESIVE AND PUNCHED



PLV... 29A
PLV... 299AS
PLV... 2910AS
scale 1:1



PLV... 29F
PLV... 298FS
PLV... 299FS
PLV... 2910FS
scale 1:1



transition profiles

FLOORS

ANODIZED ALUM. with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLV... 29A	5,5 X 29	6,83	18,44

ANODIZED ALUM. with adhesive thermo packed
bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVAA 299AS	5,5 X 29	/	7,54
PLVAO 299AS	5,5 X 29	/	7,54



ANODIZED ALUM. punched thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLVAA 29F	5,5 X 29	5,31	14,34

ANODIZED ALUM. punched with screws and screw anchors
thermo packed - bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVAA 299FS	5,5 X 29	/	6,34



ANODIZED ALUM. with adhesive thermo packed
bar length 1,03 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVAA 2910AS	5,5 X 29	/	8,21
PLVAO 2910AS	5,5 X 29	/	8,21



ANODIZED ALUM. punched with screws and screw anchors
thermo packed - bar length 1,03 lm - pack. 20 Pc


Article	H x L mm	€/lm	€/Pc
PLVAA 2910FS	5,5 X 29	/	7,06
PLVAO 2910FS	5,5 X 29	/	7,06



COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

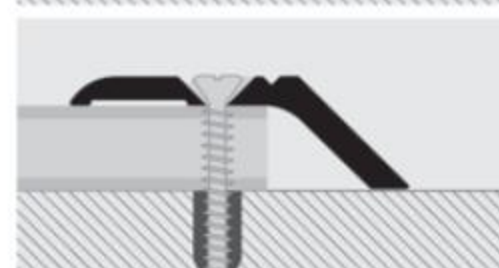

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROLEVALL 33 is a transition profile in extruded polished brass, available in the self-adhesive or punched versions. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 4 and 6mm. **PROLEVALL 33** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 33

POLISHED BRASS
WITH SELF-ADHESIVE AND PUNCHED

POLISHED BRASS with adhesive thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PLVOL 33A	5,5 X 33	17,93	48,41

POLISHED BRASS with adhesive thermo packed
bar length 0,90 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVOL 339AS	5,5 X 33	/	18,10



POLISHED BRASS punched thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PLVOL 33F	5,5 X 33	15,99	43,17

POLISHED BRASS punched with screws and screw anchors
thermo packed - bar length 0,90 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVOL 339FS	5,5 X 33	/	16,63




COLOURS



PLVOL 33A
PLVOL 338AS
PLVOL 339AS
PLVOL 3310AS
scale 1:1



PLVOL 33F
PLVOL 338FS
PLVOL 339FS
PLVOL 3310FS
scale 1:1



transition profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the suitable profile and cut it to the necessary length.

Adhesive version

2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.


Punched version

2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.


PROLEVALL 305

POLISHED STAINLESS STEEL 1.4016
AND POLISHED BRASS
WITH SELF-ADHESIVE AND PUNCHED

transition profiles

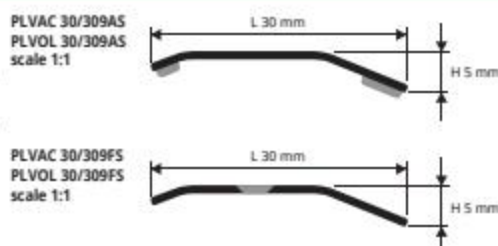

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

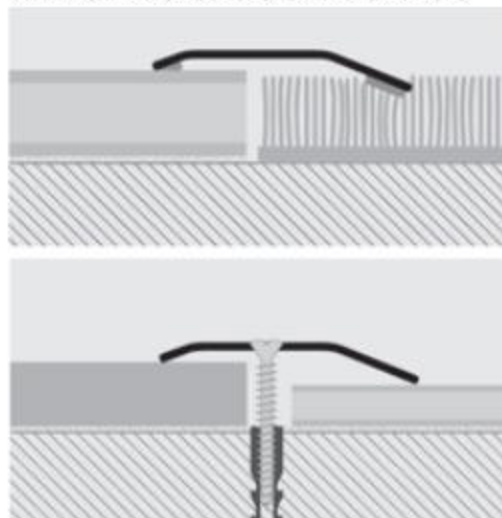

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROLEVALL 305 is a transition/terminal profile for floors of medium thickness (from 3 to 7 mm), used to join and compensate two floors of differing height, material and thickness. Ideal as a finishing terminal, it covers flaws and chipping or splintering of tiles, wood and carpeting. Available in stainless steel 1.4016 and polished brass. A protective film protects the finish of the 2.70 m long bars with either self-adhesive backing or punched for fixing with screws and anchors. The 93 cm blister pack version (self pack) is shrink-wrapped with bar code.



POLISHED STAINLESS ST. 1.4016 with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLVAC 30A	5 X 30	6,99	18,87

POLISHED STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVAC 309AS	5 X 30	/	8,58

POLISHED BRASS with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLVOL 30A	5 X 30	10,21	27,57

POLISHED BRASS with adhesive thermo packed
bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVOL 309AS	5 X 30	/	10,86

COLOURS



POLISHED STAINLESS ST. 1.4016 punched with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLVAC 30F	5 X 30	5,45	14,72

POL. STAINLESS ST. 1.4016 punched with screws and screw anchors
thermo packed - bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVAC 309FS	5 X 30	/	7,39

POLISHED BRASS punched with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLVOL 30F	5 X 30	8,27	22,33


POL. BRASS punched with screws and screw anchors
thermo packed - bar length 0,93 lm - pack. 20 Pc

Article	H x L mm	€/lm	€/Pc
PLVOL 309FS	5 X 30	/	9,24


PROLEVALL 32

ANODIZED ALUMINIUM WITH
SELF-ADHESIVE AND PUNCHED

transition profiles

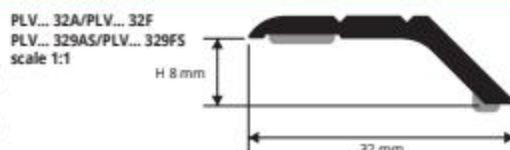

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

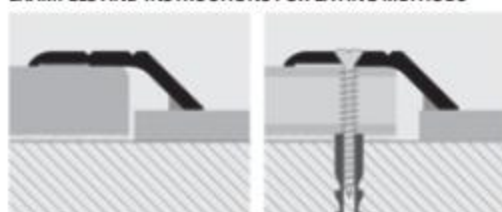

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROLEVALL 32 are transition profiles in anodized aluminium available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 7 and 9 mm. **PROLEVALL 32** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.



ANODIZED SILVER and GOLD ALUMINIUM
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PLV... 32A	32 X 8	8,69	23,46
PLV... 32F	32 X 8	5,81	15,69

"A" at the end of the product code = Item with adhesive
"F" at the end of the product code = Punched item

The code of the selected colour must be added to the article code. E.g.: PLV... 32F (chosen colour Anodized gold alum.) PLVAO 32F.

COLOURS



ANODIZED SILVER and GOLD ALUMINIUM
thermo packed - bar length 0,93 lm - pack. 20 Pc

Article	L x H mm	€/lm	€/Pc
PLV... 329AS	32 X 8	/	8,85
PLV... 329FS	32 X 8	/	6,71

"AS" at the end of the product code = Item with adhesive
"FS" at the end of the product code = Punched item


PROLEVALL 358 are transition profiles in polished extruded brass, available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 7 and 9 mm. **PROLEVALL 358** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 358

POLISHED BRASS
WITH SELF-ADHESIVE AND PUNCHED



PLVOL 358A/PLVOL 3589AS
PLVOL 358F/PLVOL 3589FS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

POLISHED BRASS thermo packed - bar length 2,7 lm
pack 20 Pcs - 54 lm (PLVOL 358F: 15 Pcs - 40,5 lm)

Article	L x H mm	€/lm	€/Pc
PLVOL 358A	35 X 8	25,63	69,20

POLISHED BRASS thermo packed
bar length 0,90 lm - pack 20 Pc

Article	L x H mm	€/lm	€/Pc
PLVOL 3589AS	35 X 8	24,46	



"A" at the end of the product code = Item with adhesive
"F" at the end of the product code = Punched Item

"AS" at the end of the product code = Item with adhesive
"FS" at the end of the product code = Punched Item

COLOURS



OL - Polished brass

PROLEVALL 4413 are transition profiles in polished extruded brass and anodized aluminium available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 13 and 15 mm. **PROLEVALL 4413** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 4413

POLISHED BRASS AND
ANODIZED SILVER ALUMINIUM
WITH SELF-ADHESIVE AND PUNCHED



PLVOL 4413A / PLVOL 44139AS
PLVOL 4413F / PLVOL 44139FS
scale 1:1



PLV... 4413A / PLV... 4413F
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

POLISHED BRASS thermo packed
bar length 2,7 lm - pack 10 Pcs - 27 lm

Article	L x H mm	€/lm	€/Pc
PLVOL 4413A	44 X 13	25,44	68,69


"A" at the end of the product code = Item with adhesive
"F" at the end of the product code = Punched Item

ANODIZED SILVER and GOLD ALUMINIUM thermo packed
bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PLVAA 4413A	44 X 13	10,90	29,43
PLVAO 4413A	44 X 13	10,90	29,43

"A" at the end of the product code = Item with adhesive
"F" at the end of the product code = Punched Item

COLOURS




transition profiles

PRONIVO


ANODIZED ALUMINIUM

transition profiles

PNV... 713A
scale 1:1

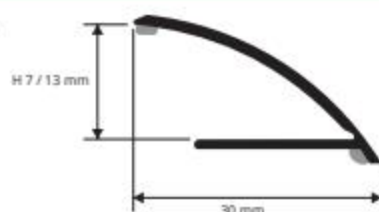

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

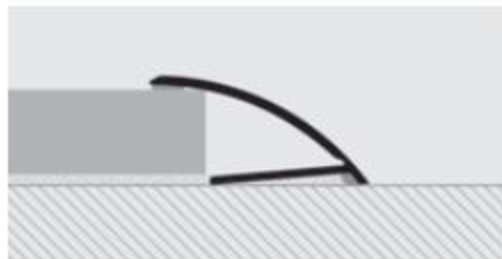

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PRONIVO is a transition and edging profile with a rounded shape in anodized aluminium with tap-down edge. It is ideal to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet. With its rounded shape it compensates for differences in thickness between 7 and 13 mm where no profile was installed at the time of laying. **PRONIVO** ensures a perfect finish and is easy to lay with the self-adhesive backing guaranteeing perfect adherence to the floor.



ANODIZED ALUMINIUM self-adhesive thermo packed
bar length 2,7 lm - pack. 30 Pcs - 81 lm

Article	H mm	€/lm	€/Pc
PNVAA 713A	7/13	7,59	20,49

COLOURS



PROTRANS


ANODIZED ALUMINIUM

transition profiles

PTS... 613A
PTS... 6139AS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

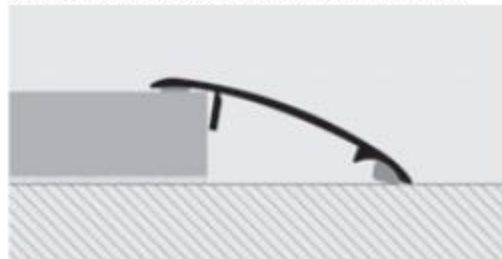

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROTRANS is a transition and edging profile with a rounded shape in anodized aluminium. It is ideal to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet. With its rounded shape it compensates for differences in thickness between 6 and 13 mm where no profile was installed at the time of laying. **PROTRANS** ensures a perfect finish and is easy to lay with the self-adhesive backing guaranteeing perfect adherence to the floor.



ANODIZED ALUMINIUM self-adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	H mm	€/lm	€/Pc
PTSAA 613A	6 / 13	7,25	19,58

ANODIZED ALUMINIUM self-adhesive thermo packed - bar length 0,90 lm - pack. 20 Pcs



Article	H mm	€/lm	€/Pc
PTSAA 6139AS	6 / 13	/	7,66
PTSAA 6139AS	6 / 13	/	7,66

COLOURS



PROFLOOR 712 is a self-adhesive sloping terminal transition profile in AISI 304/1.4301-V2A stainless steel with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFRAC 7129AS	38 X 7/12	/	9,75

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 1,66 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFRAC 71216AS	38 X 7/12	/	17,17

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PFRAC 712A	38 X 7/12	9,24	24,95

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 1,03 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFRAC 71210AS	38 X 7/12	/	10,72

COLOURS




AC - Polished stainless steel AISI 304/1.4301-V2A

PROFLOOR 712

POLISHED STAINLESS STEEL
AISI 304/1.4301-V2A WITH SELF-ADHESIVE

PFRAC 712A/7128AS/7129AS/71210AS/71216AS
scale 1:1

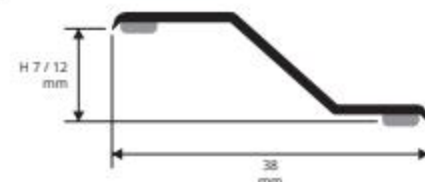

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

transition profiles

FLOORS

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED BRASS self-adhesive thermo packed bar length 0,93 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFROL 7129AS	38 X 7/12	/	13,75

POLISHED BRASS self-adhesive thermo packed bar length 1,66 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFROL 71216AS	38 X 7/12	/	24,32

POLISHED BRASS self-adhesive thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PFROL 712A	38 X 7/12	13,47	36,37

POLISHED BRASS self-adhesive thermo packed bar length 0,83 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFROL 7128AS	38 X 7/12	/	12,31

POLISHED BRASS self-adhesive thermo packed bar length 1,03 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFROL 71210AS	38 X 7/12	/	15,18

COLOURS




OL - Polished brass


PROFLOOR 712

POLISHED BRASS
WITH SELF-ADHESIVE

PFROL 712A/7128AS/7129AS/71210AS/71216AS
scale 1:1

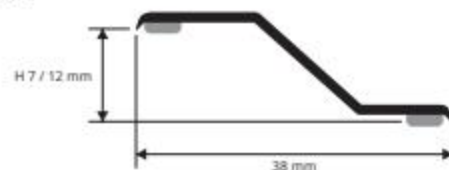

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

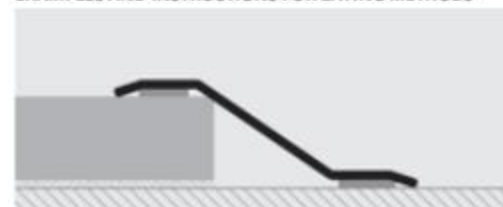

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

transition profiles

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in anodized aluminium with silver-gold-bronze finish with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



Anodized ALUMINIUM self-adhesive thermo packed bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PFR... 712A	38 X 7/12	7,31	19,74

The code of the selected colour must be added to the article code. E.g.: PFR... 712A(chosen colour anodized gold alum.) PFRAO 712A.



Anodized ALUMINIUM self-adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PFR... 7129AS	38 X 7/12	/	8,21

PROFLOOR 712

ANODIZED GOLD, SILVER AND BRONZE
ALUMINIUM WITH SELF-ADHESIVE

PFR... 712A/7129AS
scale 1:1



COLOURS




transition profiles

PROPRESS 712


POLISHED STAINLESS STEEL AISI 304/1.4301
AND POLISHED BRASS WITH SELF-ADHESIVE

transition profiles

PRAC 712A/7129AS
PRCOL 712A/7129AS
scale 1:1

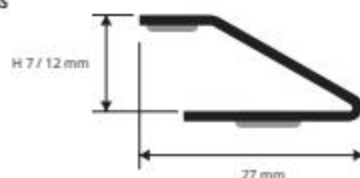

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

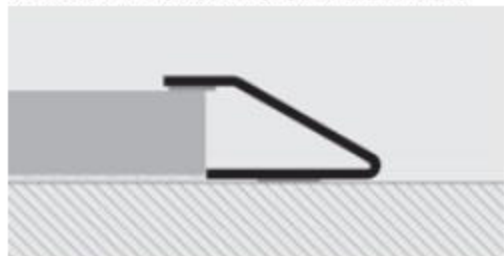

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROPRESS 712 is a self-adhesive sloping terminal transition profile in stainless steel 1.4301 and polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 7 and 12mm.

PROPRESS 712 ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PRAC 712A	27 X 7/12	12,25	33,08

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive
thermo packed - bar length 0,90 lm - pack. 20 Pcs

Article	L x H mm	€/Pc
PRAC 7129AS	27 X 7/12	13,42

COLOURS



POLISHED BRASS self-adhesive thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PRCOL 712A	27 X 7/12	15,86	42,82

POLISHED BRASS self-adhesive thermo packed
bar length 0,90 lm - pack. 20 Pcs


Article	L x H mm	€/Pc
PRCOL 7129AS	27 X 7/12	16,21

PROFLOOR 1216


POLISHED STAINLESS STEEL AISI 304/1.4301
AND POLISHED BRASS WITH SELF-ADHESIVE

transition profiles

PFRAC 1216A/12169AS
PFCOL 1216A/12169AS
scale 1:1

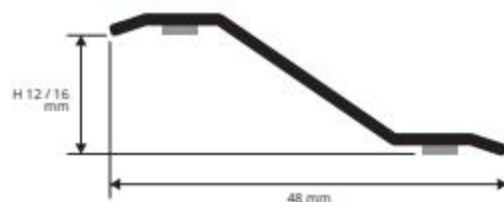

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

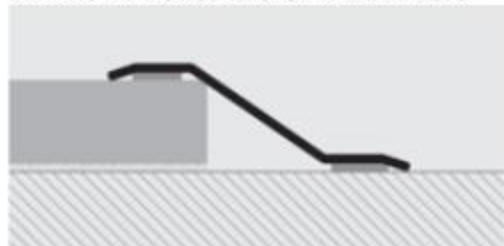

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROFLOOR 1216 is a self-adhesive chamfered terminal transition profile in stainless steel AISI 304/1.4301-V2A and polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 12 and 16mm. **PROFLOOR 1216** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PFRAC 1216A	48 X 12/16	14,12	38,12

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive
thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	L x H mm	€/Pc
PFRAC 12169AS	48 X 12/16	13,85



POLISHED BRASS self-adhesive thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PFCOL 1216A	48 X 12/16	20,40	55,08

POLISHED BRASS self-adhesive thermo packed
bar length 0,93 lm - pack. 20 Pcs

Article	L x H mm	€/Pc
PFCOL 12169AS	48 X 12/16	20,50

COLOURS



PROLINOLEUM is a self-adhesive transition profile in anodized aluminium with gold/silver finish. It is used to give a clean-cut, elegant finish to hardwearing surfaces in PVC or linoleum and other thin materials between 2-3 mm thick. **PROLINOLEUM** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROLINOLEUM

ANODIZED SILVER ALUMINIUM
WITH AND WITHOUT SELF-ADHESIVE



COLOURS



AA - Anodized silver alum.

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLUAA 16	2,5 X 16	4,42	11,93

ANODIZED SILVER ALUMINIUM thermo packed - WITH ADHESIVE -
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm	€/lm	€/Pc
PLUAA 16A	2,5 X 16	5,59	15,09

PLU ... 16
PLU ... 16A
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

profiles for low thicknesses

FLOORS

PROFLOOR 24 is a self-adhesive transition profile with chamfered edges in stainless steel 1.4016 and polished brass with protective film. It is used to give a clean-cut, elegant finish to hardwearing surfaces in PVC and linoleum - carpeting and other thin materials between 2 and 5mm thick. **PROFLOOR 24** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROFLOOR 24

POLISHED STAINLESS STEEL AISI 304/1.4301
AND POLISHED BRASS WITH SELF-ADHESIVE



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PFRAC 24A	2/4,5 X 30	6,99	18,87

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive
thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	L x H mm	€/Pc
PFRAC 249AS	2/4,5 X 30	7,71



POLISHED BRASS self-adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PFROL 24A	2/4,5 X 30	10,21	27,57

POLISHED BRASS self-adhesive thermo packed
bar length 0,93 lm - pack. 20 Pcs

Article	L x H mm	€/Pc
PFROL 249AS	2/4,5 X 30	10,86




COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A
OL - Polished brass

PFRAC 24A/249A
PFROL 24A/249A
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

profiles for low thicknesses


PROSLIDER KL ALL

ANODIZED SILVER ALUMINIUM

PROSLIDER KL ALL is a slide shape progressive transition terminal square suitable for connecting perfectly without steps two floor levels. The particular strength of the square allows to resist and bear heavy loads and frequent passages of manual trolleys and motor vehicles besides protecting the edge of the higher floor. The **PROSLIDER KL ALL** is especially used to connect LA Kerlite/Laminam and thin ceramic tiles to each other or else it is used with wood and/or a pre-existing floor. Available in anodized aluminium.

profiles for low thicknesses

PDKLAA 045
scale 1:1

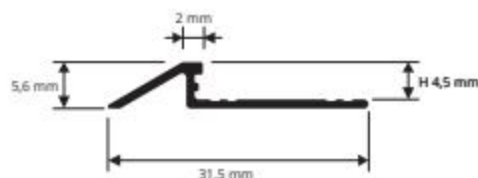

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the profile with the required finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the "PROSLIDER KL ALL". 4. Align it flush with the floor/covering. 5. Use the adhesive to seal any empty interstices.

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PDKLAA 045	4,5	6,71	18,12

COLOURS



AA - Anodized silver alum.


PROCOVER 1045 ALL

ANODIZED AND POLISHED

PROCOVER 1045 ALL is a joint cover profile in anodized aluminium. It is applied at the end of the laying process between two adjoining floors placed at the same level, with a gap of 3 to 6 mm between the two kerlite /laminam/ or thin ceramic tile floors laid with the adhesive. It protects the external edge of the floor/covering. It is easy to lay and aesthetically pleasing. The design of the profile with lower vertical arrowhead part allows excellent anchorage with silicone / adhesive.

profiles for low thicknesses

PCR...1045
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROCOVER 1045 ALL" in the desired finish considering a side lap of 2/3 mm. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

IMPORTANT: Take care of the external edges of the aluminium "PROCOVER 1045 ALL". They must be protected from aggressive substances such as adhesives and sealants and from smoothing or scraping action.



COLOURS

AA - Anodized silver alum.	AT - Anod. titanium alum.	AG - Anod. grey gun alum.
BC - Polished chrome alum.	BO - Polished gold alum.	BR - Polished copper alum.

ANODIZED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PCRAA 1045	4,5	3,66	9,88
PCRAT 1045	4,5	4,39	11,85
PCRAG 1045	4,5	6,70	18,09

POLISHED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PCRBC 1045	4,5	6,28	16,96
PCRBO 1045	4,5	6,28	16,96
PCRBR 1045	4,5	7,54	20,36






PROCOVER

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROCOVER is a joint-cover profile in stainless steel (polished or brushed) with aluminium supports. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive. The aluminium structure with the stainless steel lining provides it with a high level of resistance to cuts and deformation.

threshold - joint-cover profiles

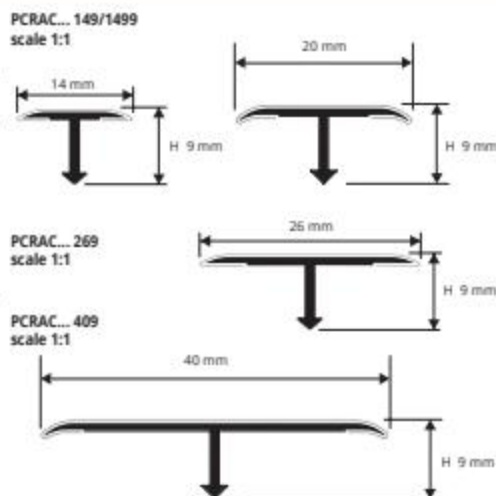

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A
with protective film - bar length 2,7 lm

Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCRAC 149	40	14 X 9	11,19	30,21
PCRAC 209	40	20 X 9	14,54	39,26
PCRAC 269	30	26 X 9	15,99	43,17
PCRAC 409	20	40 X 9	21,37	57,70

COLOURS



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A
with protective film - bar length 2,7 lm - 4/10 mm

Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCRACS 149	40	14 X 9	14,12	38,12
PCRACS 209	40	20 X 9	16,06	43,36
PCRACS 269	30	26 X 9	20,10	54,27
PCRACS 409	20	40 X 9	24,23	65,42

bar length 0,90 lm


Article	Pcs/Pack	L x H mm	€/Pc
PCRAC 1499	20	14 X 9	11,87
PCRACS 1499	20	14 X 9	14,55

PROCOVER


POLISHED, CHROMED AND ANTIQUE BRASS

PROCOVER is a joint-cover profile in polished, chromed and antique brass. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

threshold - joint-cover profiles

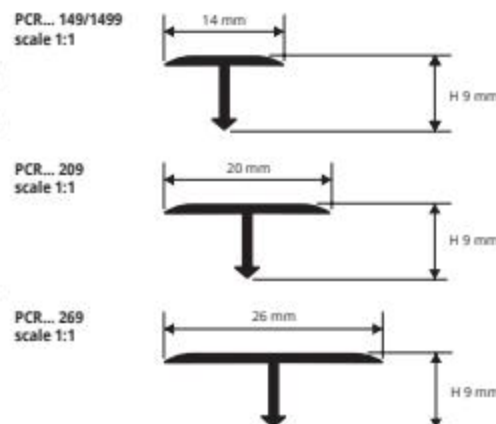

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

Profiles in natural or polished brass may be subject to oxidation in environments with high degrees of humidity. Resulting marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidel, Smac and similar.



POLISHED BRASS thermo packed - bar length 2,7 lm

Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCROL 149	20	14 X 9	8,15	22,01
PCROL 209	20	20 X 9	12,32	33,26
PCROL 269	20	26 X 9	14,87	40,15

bar length 0,90 lm - pack 40 Pcs

Article	Pcs/Pack	L x H mm	€/Pc
PCROL 1499	40	14 X 9	8,31

CHROMED BRASS (polished stainless st. effect) thermo packed
bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PCROC 149	14 X 9	16,36	44,17
PCROC 209	20 X 9	19,03	51,38
PCROC 269	26 X 9	22,61	61,05




ANTIQUÉ BRASS thermo packed
bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PCROB 149	14 X 9	26,12	70,52
PCROB 209	20 X 9	29,56	79,81
PCROB 269	26 X 9	32,65	88,16

BRUSHED BRASS thermo packed
bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PCROS 149	14 X 9	8,15	22,01
PCROS 209	20 X 9	12,32	33,26
PCROS 269	26 X 9	14,87	40,15

COLOURS

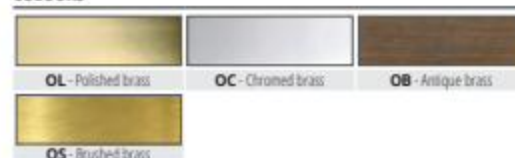

PROCOVER is a joint-cover profile in anodized aluminium. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

PROCOVER

ANODIZED AND POLISHED



POLISHED ALUMINIUM thermo packed
bar length 2,7 lm - pack 40 Pcs - 108 lm

Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCRBC 149	40	14 X 9	7,16	19,33
PCRBO 149	40	14 X 9	7,16	19,33

bar length 0,90 lm - pack 40 Pcs


Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCRAA 1499	40	14 X 9	4,97	
PCRDB 1499	40	14 X 9	6,37	
PCRBC 1499	40	14 X 9	7,31	
PCRAA 2699	40	26 X 9	6,46	

ANODIZED ALUMINIUM
thermo packed - bar length 2,7 lm




Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCRAA 149	40	14 X 9	4,20	11,34
PCRAO 149	40	14 X 9	5,05	13,64
PCRAB 149	40	14 X 9	5,05	13,64
PCRAT 149	40	14 X 9	5,05	13,64
PCRDB 149	40	14 X 9	5,38	14,53
PCRAG 149	40	14 X 9	7,26	19,60
PCRNEO 149	40	14 X 9	7,82	21,11
PCRAA 209	40	20 X 9	4,50	12,15
PCRAO 209	40	20 X 9	5,40	14,58
PCRAB 209	40	20 X 9	5,40	14,58
PCRAT 209	40	20 X 9	5,40	14,58
PCRDB 209	40	20 X 9	5,84	15,77
PCRAG 209	40	20 X 9	7,67	20,71
PCRNEO 209	40	20 X 9	8,42	22,73
PCRAA 269	40	26 X 9	5,59	15,09
PCRAO 269	40	26 X 9	6,72	18,14
PCRAB 269	40	26 X 9	6,72	18,14
PCRAT 269	40	26 X 9	6,72	18,14
PCRDB 269	40	26 X 9	7,28	19,66
PCRAA 409	20	40 X 9	8,21	22,17


PCR... 149/1499
scale 1:1



PCR... 209
scale 1:1



PCR... 269
PCRAA 409
scale 1:1



COLOURS

AA - Anodized silver alum.	DB - Anod. dark bronze alum.	AT - Anodized titanium alum.
AB - Anodized bronze alum.	AO - Anodized gold alum.	AG - Anod. grey gun alum.
BC - Polished chrome alum.	BO - Polished gold alum.	NEO - Anod. black alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



PROCOVER WOOD is a joint-cover profile in aluminium covered with a very strong film available in 77 wooden finishes (72 on demand). It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

PROCOVER WOOD

ALUMINIUM COVERED WITH PROTECTIVE FILM
IN WOODEN FINISHES

ALUMINIUM COVERED WOODEN FINISHES thermo packed
bar length 2,7 lm - pack 40 Pcs - 108 lm (L 26 mm - 54 lm)

Article	L x H mm	€/lm	€/Pc
PCRA... 149	14 X 9	6,80	18,36
PCRA... 269	26 X 9	11,96	32,29

The code of the selected colour must be added to the article code.
Es.: PCRA... 149 (chosen finish light oak) PCRA04W 149.



COLOURS

05W - Light oak (strip)	29W - White oak	30W - Grey oak
-------------------------	-----------------	----------------

PCRA... 149
scale 1:1



PCRA... 269
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

PROCOVER INSERT for inserting Procover profiles

VINYL RESIN / BLACK RUBBER

Vinyl resin/rubber profile "U-form" for inserting PROCOVER with PINBFT 45 or PINBFT 40 Proinsert System base.


VINYL RESIN/RUBBER

length 2,7 lm and/or in rolls 100 lm


Article	lm	€/lm	€/Pc	€/rotolo
PCPCR	2,7	3,80	10,56	/
PCPCR	100	3,80	/	391,40

PROINSERT BASE 45 AND BASE 40 - alum. punched - perfored
bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	Larg. mm	€/lm	€/Pc
PINBFT 45	45	6,56	17,71
PINBFT 40	40	6,48	17,5

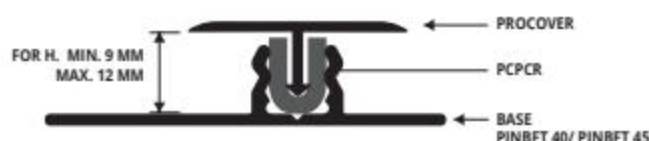

INSERT
+BASE 45/40
scale 1:1

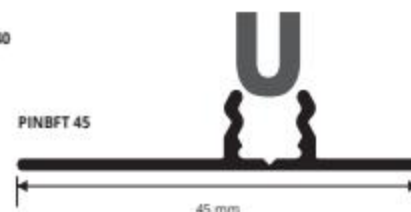


PINBFT 40



PROPLATE

POLISHED STAINLESS 1.4016 STEEL
SELF-ADHESIVE OR PUNCHED

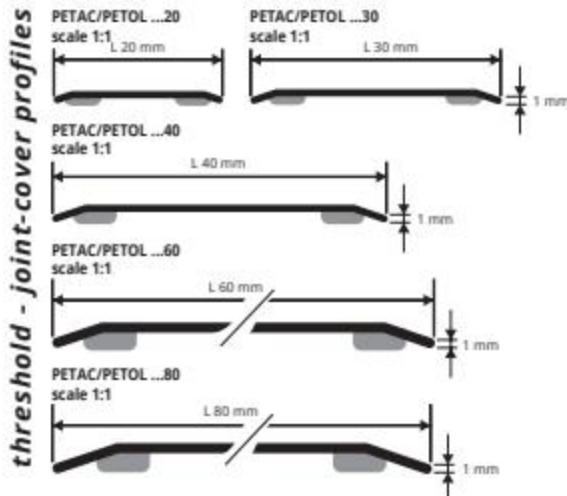


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROPLATE" in the required width and material and whether punched or with self-adhesive backing. 2. Cut the profile to the required length. When laying the self-adhesive Proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers. 4. When laying the punched version, align the profile and mark the position of the holes using the holes in the profile as reference. 5. Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors) 6. Align the profile and tighten the galvanised or brass flathead screws.

PROPLATE is a flat joint-cover profile with special profiled edges for perfect adherence to flooring. Made in stainless steel 1.4016 with a protective film and available with or without adhesive or for certain widths also in the punched version. Available in widths of 20 - 30 - 40 - 60 - 80 mm with protective film.

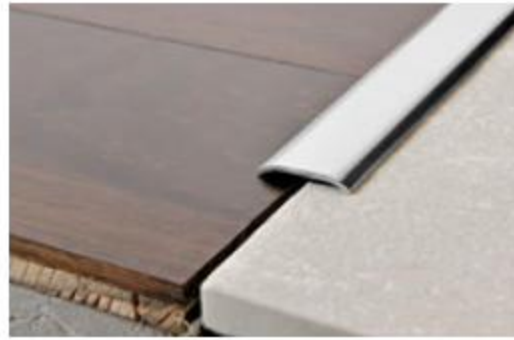

POLISHED STAINLESS 1.4016 ST. thermo packed - ADHESIVE
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20 - 30mm - 108 lm) - 10/10 mm

Article	Width	€/lm	€/Pc
PETAC 20A	20mm	6,53	17,63
PETAC 30A	30mm	6,99	18,87
PETAC 40A	40mm	10,11	27,30
PETAC 60A	60mm	17,66	47,68
PETAC 80A	80mm	22,31	60,24

POLISHED STAINLESS 1.4016 STEEL thermo packed - without holes
bar length 2,70 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	Width	€/lm	€/Pc
PETAC 60	60mm	15,51	41,88
PETAC 80	80mm	20,14	54,38

PUNCHED POLISHED STAINLESS 1.4016 ST. with protective film
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 30mm - 108 lm) - 10/10 mm

Article	Width	€/lm	€/Pc
PETAC 30F	30mm	5,45	14,72
PETAC 40F	40mm	8,54	23,06



POLISHED STAINLESS 1.4016 ST. thermo packed
ADHESIVE bar length 0,93 lm - pack. 20 Pcs - 10/10 mm

Article	Width	€/Pc
PETAC 309AS	30mm	7,03
PETAC 609AS	60mm	17,47
PETAC 809AS	80mm	22,45

POLISHED STAINLESS 1.4016 ST. thermo packed -
PUNCHED WITH SCREWS
bar length 0,93 lm - pack. 20 Pcs - 10/10 mm

Article	Width	€/Pc
PETAC 309FS	30mm	5,72

COLOURS




AC - Polished stainless
steel 1.4016

30F - ITEM AVAILABLE WHILE STOCKS LAST.

PROPLATE

POLISHED BRASS
SELF-ADHESIVE OR PUNCHED

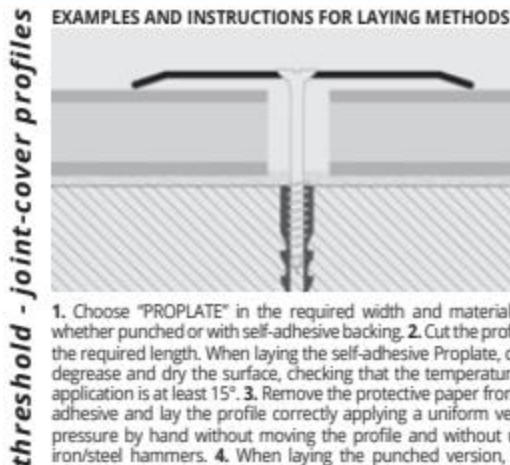

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROPLATE" in the required width and material and whether punched or with self-adhesive backing. 2. Cut the profile to the required length. When laying the self-adhesive Proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers. 4. When laying the punched version, align the profile and mark the position of the holes using the holes in the profile as reference. 5. Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors) 6. Align the profile and tighten the galvanised or brass flathead screws.

COLOURS



OL - Polished brass



POLISHED BRASS thermo packed ADHESIVE
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20/30mm - 108 lm) - 10/10 mm

Article	Width	€/lm	€/Pc
PETOL 20A	20mm	9,52	25,70
PETOL 30A	30mm	9,77	26,38
PETOL 40A	40mm	12,35	33,35
PETOL 60A	60mm	21,63	58,40

POLISHED BRASS thermo packed WITHOUT HOLES
bar length 2,70 lm - pack. 20 Pcs - 54 lm (L 20 mm - 108 lm) - 10/10 mm

Article	Width	€/lm	€/Pc
PETOL 20	20mm	7,68	20,74
PETOL 60	60mm	19,76	53,35



POLISHED BRASS thermo packed ADHESIVE
bar length 0,83 lm - pack. 20 Pcs - 10/10 mm

Article	Width	€/Pc
PETOL 308AS	30mm	9,37
PETOL 408AS	40mm	11,52

POLISHED BRASS thermo packed
bar length 0,93 lm - pack. 20 Pcs - 10/10 mm

Article	Width	€/Pc
PETOL 309AS	30mm	10,42
PETOL 309FS	30mm	9,05
PETOL 409AS	40mm	13,39
PETOL 409FS	40mm	11,87

AS at the end of the product code = Item with adhesive

FS at the end of the product code = Punched item

PROPLATE 80 ALZ is a new aluminium joint cover, threshold cover. It is very resistant and suitable for covering the expanding joint of two different supporting structures, or to connect a floor with an adjoining one of the same or different kind. Particularly used in Industrial field, in the malls, sport facilities and gyms equipped with wood and/or resin floors.

PROPLATE 80 ALZ

KNURLED ANODIZED SILVER ALUMINIUM



ANODIZED SILVER ALUMINIUM thermo packed ADHESIVE
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PETAA 80Z - 40,5 lm)

Article	Width mm	€/lm	€/Pc
PETAA 80ZA	80	20,03	54,08

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PETAA 80Z - 40,5 lm)

Article	Width mm	€/lm	€/Pc
PETAA 80Z	80	18,64	50,33

COLOURS



AA - Anodized silver alum.

PETAA 80ZA
PETAA 80Z



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROPLATE 80ALZ" model with or without sticker and cut it to the required length.

Adhesive version

2. Degrease, wash and clean accurately the solid floor. 3. Remove the protective label from the sticker (sticker model). 4. Rest the square pressing evenly without hammering.

Punched version

2. Perforate on one side and insert the nogs in the holes. 3. Fix and screw the square equipped with flared head screws suitable to the holes made.

threshold - joint-cover profiles

PROCOVER 14PT is a small aluminium joint cover / threshold cover square. It is used to finish technically floors laid at the same level in ceramic tiles / ceramics ceramics / wood. It covers eventual laying flaws and guarantees that the floors which are underneath expand enough. In Gold-Silk anodized Aluminium and Bronze with sticker.

PROCOVER 14PT

ANODIZED SILVER, GOLD AND BRONZE ALUMINIUM



ANODIZED ALUMINIUM WITH ADHESIVE thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	Width mm	€/lm	€/Pc
PCRAA 14PTA	14	5,24	14,15
PCRAO 14PTA	14	5,24	14,15
PCRAB 14PTA	14	5,24	14,15

COLOURS




AA - Anodized silver alum. AO - Anodized gold alum. AB - Anodized bronze alum.

PCRAA 14PTA
PCRAO 14PTA
PCRAB 14PTA
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

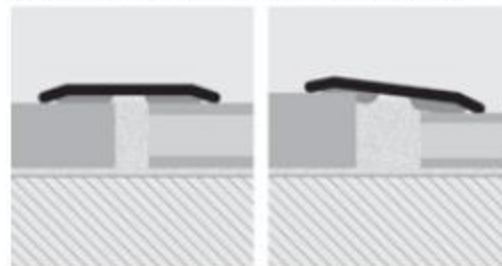

1. Choose the superficial finish of "PROCOVER 14PT" and cut it to the required length. 2. Degrease, wash and clean accurately the solid floor. 3. Remove the protective label from the sticker. 4. Lay the square pressing evenly without hammering.

threshold - joint-cover profiles



PROSOL 18-30-35-40 in steel are self-adhesive joint - covers in stainless steel 1.4016 available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 18-30-35-40

STAINLESS STEEL 1.4016 WITH
SELF-ADHESIVE WITH PROTECTIVE FILM

FLOORS



STAINLESS ST. 1.4016 with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 35/40 mm - 54 lm)

Article	Width-thick.	€/lm	€/Pc
PLSAC 18A	18 mm - 10/10	5,75	15,53
PLSAC 30A	30 mm - 10/10	6,31	17,04
PLSAC 35A	35 mm - 10/10	7,12	19,22
PLSAC 40A	40 mm - 12/10	9,95	26,87

STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 0,83 lm - pack. 20 Pcs

Article	Width-thick.	€/Pc
PLSAC 308A	30 mm - 10/10	5,25
PLSAC 358A	35 mm - 10/10	5,91

STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	Width-thick.	€/Pc
PLSAC 309A	30 mm - 10/10	5,86
PLSAC 359A	35 mm - 10/10	6,72

COLOURS



AC - Polished stainless steel 1.4016

STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 0,83 lm - pack. 20 Pcs

Article	Width-thick.	€/Pc
PLSAC 308AS	30 mm - 10/10	6,57
PLSAC 358AS	35 mm - 10/10	6,96

STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	Width-thick.	€/Pc
PLSAC 309AS	30 mm - 10/10	7,23
PLSAC 359AS	35 mm - 10/10	7,77
PLSAC 409AS	40 mm - 12/10	10,44

STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 1,03 lm - pack. 20 Pcs

Article	Width-thick.	€/Pc
PLSAC 3010AS	30 mm - 10/10	7,96


STAINLESS ST. 1.4016 with adhesive
thermo packed - bar length 1,66 lm - pack. 20 Pcs

Article	Width-thick.	€/Pc
PLSAC 3016AS	30 mm - 10/10	12,50
PLSAC 3516AS	35 mm - 10/10	13,57

PLSAC 18A
scale 1:1



PLSAC 30A/3010AS/309AS/308A/308AS/3016AS
scale 1:1



PLSAC 35A/359A/359AS/358A/358AS
scale 1:1




PLSAC 40A/409AS
scale 1:1




threshold - joint-cover profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

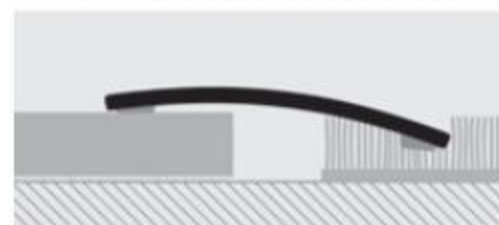

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

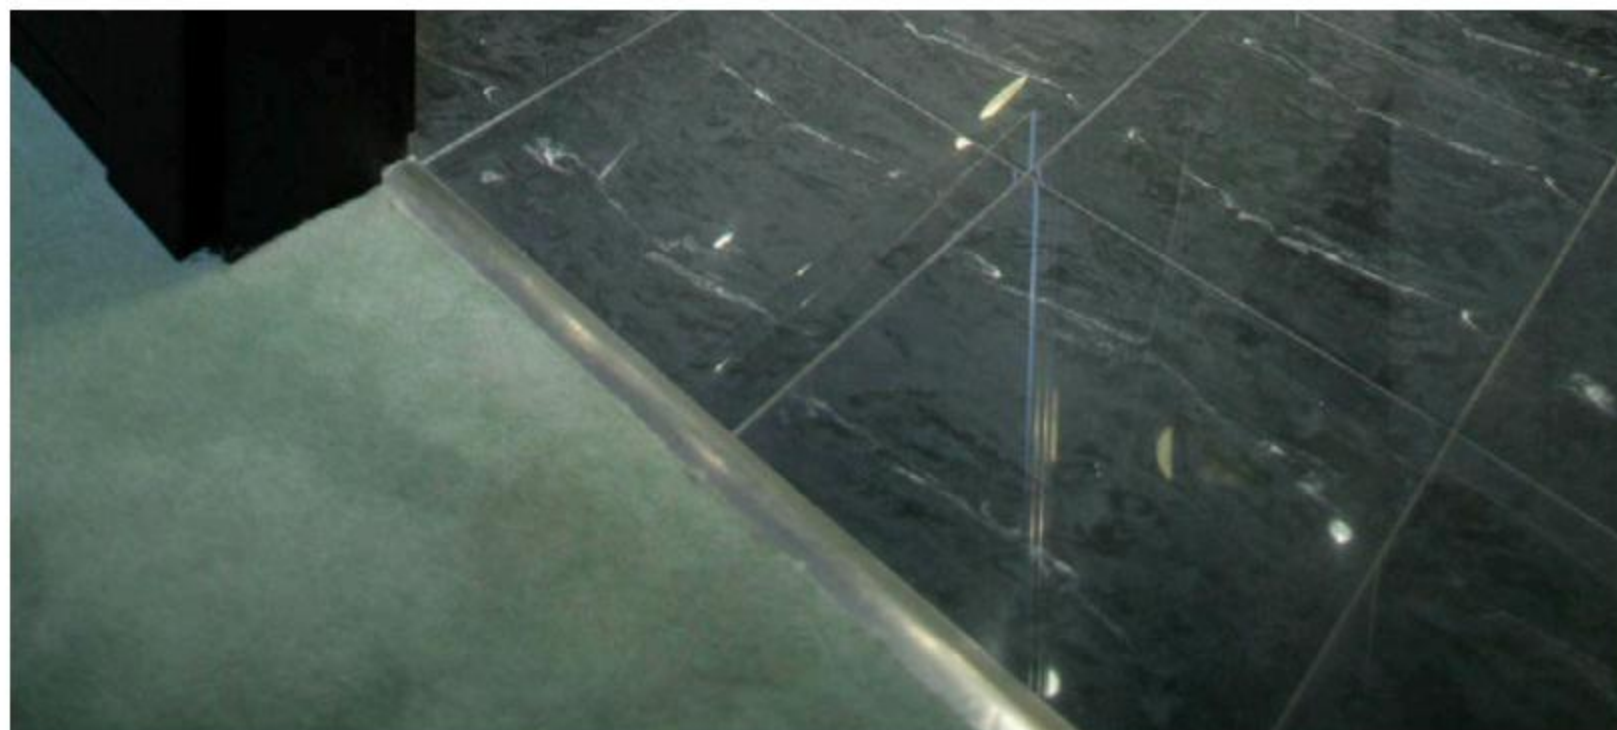

PROSOL 30-35-40

PUNCHED STAINLESS STEEL 1.4016
WITH PROTECTIVE FILM

PLSAC 30F/308F/309F/308FS/309FS/3010FS/3016FS
scale 1:1




PLSAC 35F/358F/359F/358FS/359FS/3516FS
scale 1:1



PLSAC 40F/409FS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

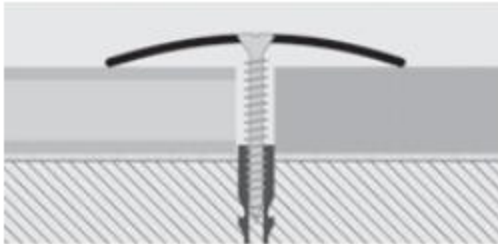

PROSOL 30-35-40 in steel are punched joint - covers in stainless steel 1.4016 available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.



STAINLESS ST. 1.4016 punched - with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm (L 30 mm - 108 lm)

Article	Width-thick.	€/lm	€/Pc
PLSAC 30F	30 mm - 10/10	4,80	12,96
PLSAC 35F	35 mm - 10/10	5,72	15,44

STAINLESS ST. 1.4016 punched with screws and screw anchors
thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSAC 309FS	30 mm - 10/10	5,86	



AC - Polished stainless
Steel 1.4016

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROSOL 30-35-40

PUNCHED POLISHED BRASS
WITH PROTECTIVE FILM

PLSOL 30F/308F/309F/3010F/3016F/308FS/309FS/3010FS/3016FS
scale 1:1




PLSOL 35F/359F/358FS/359FS/3510FS/3516FS
scale 1:1



PLSOL 40F/409F/409FS/4016FS
scale 1:1




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

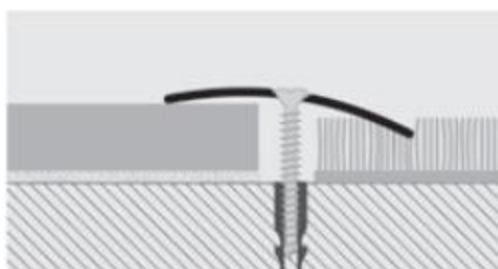

POLISHED BRASS punched with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 35/40mm - 54 lm)

Article	Width-thick.	€/lm	€/Pc
PLSOL 30F	30 mm - 10/10	7,39	19,95

COLOURS



OL - Polished brass

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROSOL 18-30-35-40 in brass are self-adhesive joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 18-30-35-40

POLISHED BRASS WITH SELF-ADHESIVE
WITH PROTECTIVE FILM

FLOORS



POLISHED BRASS with adhesive thermo packed

bar length 2,7 lm - pack 40 Pcs - 108 lm (L 35/40mm - 54 lm)

Article	Width-thick.	€/lm	€/Pc
PLSOL 18A	18 mm - 10/10	8,54	23,06
PLSOL 30A	30 mm - 10/10	9,20	24,84
PLSOL 35A	35 mm - 10/10	11,29	30,48
PLSOL 40A	40 mm - 10/10	21,14	57,08

POLISHED BRASS with adhesive thermo packed

bar length 0,90 lm - pack 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSOL 189A	10 mm - 10/10	8,83	

POLISHED BRASS with adhesive thermo packed

bar length 0,93 lm - pack 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSOL 309A	30 mm - 10/10	8,54	

POLISHED BRASS with adhesive thermo packed

bar length 1,03 lm - pack 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSOL 3010A	30 mm - 10/10	9,49	

POLISHED BRASS with adhesive thermo packed

bar length 0,83 lm - pack 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSOL 308AS	30 mm - 10/10	8,83	
PLSOL 358AS	35 mm - 10/10	10,70	

POLISHED BRASS with adhesive thermo packed

bar length 0,93 lm - pack 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSOL 309AS	30 mm - 10/10	9,61	
PLSOL 359AS	35 mm - 10/10	11,87	
PLSOL 409AS	40 mm - 10/10	21,23	

POLISHED BRASS with adhesive thermo packed

bar length 1,03 lm - pack 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSOL 3010AS	30 mm - 10/10	10,77	
PLSOL 3510AS	35 mm - 10/10	13,10	

POLISHED BRASS with adhesive thermo packed

bar length 1,66 lm - pack 20 Pcs

Article	Width-thick.	€/lm	€/Pc
PLSOL 3016AS	30 mm - 10/10	17,22	
PLSOL 3512AS	35 mm - 10/10	15,42	
PLSOL 3516AS	35 mm - 10/10	21,04	

COLOURS



OL - Polished brass

PLSOL 18A/189A
scale 1:1



PLSOL 30A/308A/309A/3010A/3016A/308AS/309AS/3010AS/3016AS
scale 1:1



PLSOL 35A/359A/358AS/359AS/3510AS/3516AS
scale 1:1




PLSOL 40S/409S/409SS/416SS
scale 1:1



threshold - joint-cover profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

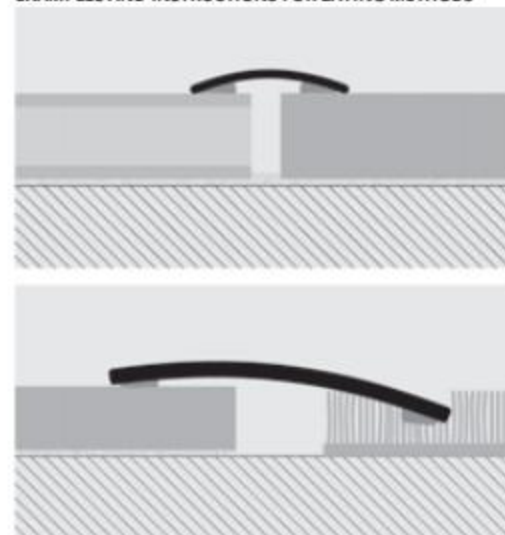

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROSOL 30-35-40

ANODIZED, POLISHED ALUMINIUM
WITH SELF-ADHESIVE AND PUNCHED

PROSOL 30-35-40 are self-adhesive or punched joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold.

PROSOL is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PLS... 30A/309A/308AS/309AS/3010AS/3016AS
scale 1:1



PLS... 35A
scale 1:1



PLS... 40A
scale 1:1




PLS... 30F/309F/308FS/309FS/3016FS
scale 1:1






PLS... 35F
scale 1:1



PLS... 40F
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

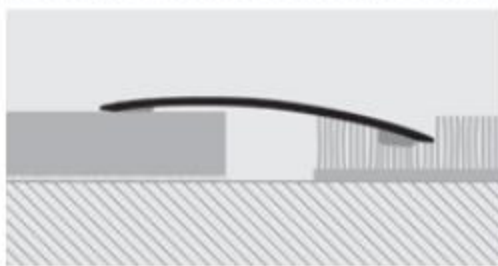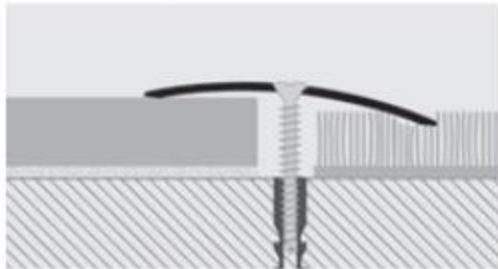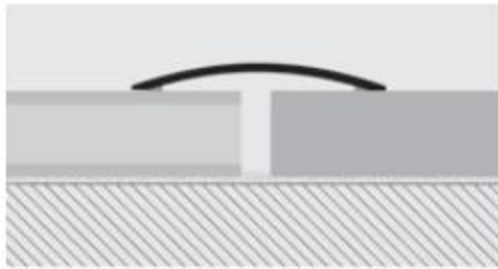

1. Choose the suitable profile and cut it to the necessary length.

Adhesive version

2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.



ANODIZED ALUMINIUM punched thermo packed
bar length 2,7 lm - pack 40 Pcs - 108 lm

Article	Width-thick.	€/lm	€/Pc
PLSAA 30F	30 mm - 1,3	4,20	11,34
PLSAA 35F	35 mm - 1,5	5,40	14,58
PLSAA 40F	40 mm - 2	6,63	17,90

ANODIZED ALUM. punched with screws and screw anchors
thermo packed - bar length 0,93 lm - pack 20 Pcs



Article	Width-thick.	€/Pc
PLSAA 309FS	30 mm - 10/10	5,40

ANODIZED ALUMINIUM with adhesive
thermo packed - bar length 1,66 lm - pack 20 Pcs



Article	Width-thick.	€/Pc
PLSAA 3016AS	30 mm - 10/10	11,39

ANODIZED ALUMINIUM with adhesive
thermo packed - bar length 0,93 lm - pack 20 Pcs



Article	Width-thick.	€/Pc
PLSAA 309A	30 mm - 10/10	5,40
PLSAO 309A	30 mm - 10/10	5,40



ANODIZED ALUMINIUM with adhesive thermo packed
bar length 2,7 lm - pack 40 Pcs - 108 lm

Article	Width-thick.	€/lm	€/Pc
PLSAA 30A	30 mm - 1,3	5,81	15,69
PLSAO 30A	30 mm - 1,3	5,81	15,69
PLSAB 30A	30 mm - 1,3	5,81	15,69
PLSAA 35A	35 mm - 1,5	6,98	18,85
PLSAA 40A	40 mm - 2	8,16	22,03
PLSAO 40A	40 mm - 2	8,16	22,03
PLSAB 40A	40 mm - 2	8,16	22,03

ANODIZED ALUMINIUM with adhesive
thermo packed - bar length 0,83 lm - pack 20 Pcs



Article	Width-thick.	€/Pc
PLSAA 308AS	30 mm - 10/10	5,86

ANODIZED ALUMINIUM with adhesive
thermo packed - bar length 0,93 lm - pack 20 Pcs



Article	Width-thick.	€/Pc
PLS... 309AS	30 mm - 10/10	6,56

ANODIZED ALUMINIUM with adhesive
thermo packed - bar length 1,03 lm - pack 20 Pcs



Article	Width-thick.	€/Pc
PLSAA 3010AS	30 mm - 10/10	7,18

COLOURS

AA - Anodized silver alum.	AO - Anodized gold alum.	AB - Anodized bronze alum.	BC - Polished chrome alum.	BO - Polished gold alum.

PROLEVALL 25-35-38-50 are joint - covers in anodized aluminium with gold, silver and bronze finish in various widths with a more or less knurled flat surface, available with self-adhesive backing or punched in various lengths. They are used to join floors of the same or differing material e.g. ceramic tiles, wood, marble, parquet or laminated, mainly to cover flaws created during laying or expansion joints. The chamfered edges ensure perfect adhesion to the floor, while the flat top allows perfect door closure. Recommended for dwellings and public environments with intense pedestrian traffic. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROLEVALL 25-35-38-50

ANODIZED ALUMINIUM
WITH SELF-ADHESIVE AND PUNCHED

FLOORS



ANODIZED ALUMINIUM with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width mm	€/lm	€/Pc
PLVAA 25A	25	5,81	15,69
PLVAO 25A	25	5,81	15,69
PLV... 35A	35	6,90	18,63
PLVAA 38A	38	7,54	20,36
PLVAO 38A	38	7,54	20,36
PLVAA 50A	50	9,14	24,68
PLVAO 50A	50	9,14	24,68

The code of the selected colour must be added to the article code.
E.g.: PLV... 25A (chosen finish anod. silver) PLVAA 25A.

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	Width mm	€/Pc
PLVAA 259AS	25	6,56
PLVAA 359AS	35	7,54
PLVAO 359AS	35	7,54
PLVAB 359AS	35	7,54
PLVAA 389AS	38	8,21
PLVAO 389AS	38	8,21
PLVAB 389AS	38	8,21

ANODIZED ALUMINIUM punched thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	Width mm	€/lm	€/Pc
PLVAA 25F	25	4,28	11,56
PLV... 35F	35	5,40	14,58
PLV... 38F	38	6,00	16,20
PLVAA 50F	50	7,84	21,17

The code of the selected colour must be added to the article code.
E.g.: PLV... 25F (chosen finish anod. silver) PLVAA 25F.

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pcs

Article	Width mm	€/Pc
PLVAA 259FS	25	5,46
PLVAA 359FS	35	6,43
PLVAB 389FS	38	6,77


ANODIZED ALUMINIUM with adhesive thermo packed - bar length 1,66 lm - pack. 20 Pcs

Article	Width mm	€/Pc
PLVAA 3516AS	35	13,26

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 1,03 lm - pack. 20 Pcs

Article	Width mm	€/Pc
PLVAA 3510AS	35	8,27

PLV... 25A
PLV... 259A
scale 1:1



PLV... 35A
PLV... 359A
PLV... 3510A
PLV... 3516A
scale 1:1




PLV... 38A
PLV... 389A
scale 1:1



PLV... 50A
PLV... 509A
scale 1:1



PLV... 25F
PLV... 259F
scale 1:1



PLV... 35F
PLV... 359F
PLV... 3510F
PLV... 3516F
scale 1:1




PLV... 38F
PLV... 389F
scale 1:1



PLV... 50F
PLV... 509F
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

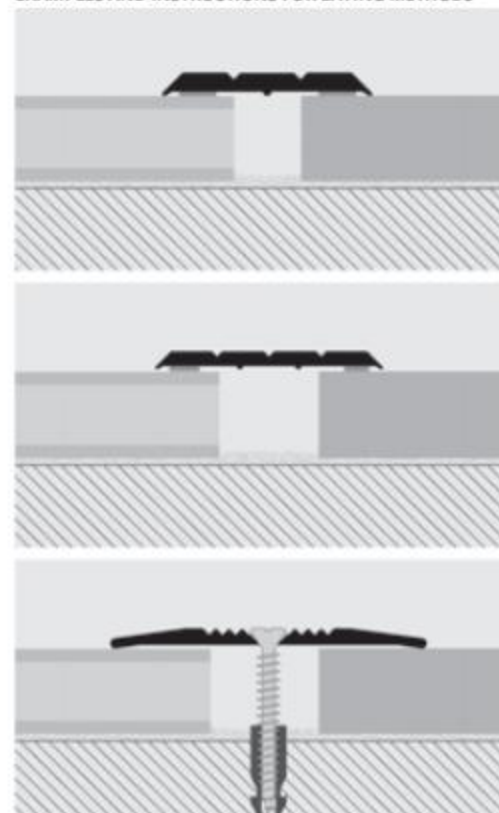

1. Choose the suitable profile and cut it to the necessary length.


Adhesive version

2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

COLOURS



PROMOQUETTE


ANODIZED ALUMINIUM
WITH OR WITHOUT SELF-ADHESIVE

carpet gripper profiles

PMQ... 12/ 126/2
scale 1:1



PMQ... 12A /127AS /128AS /129AS
scale 1:1

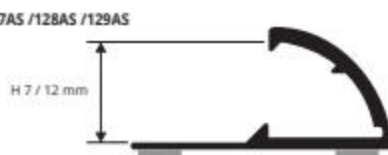

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Cut the profile to the necessary length. 2. Fix the "PROMOQUETTE" to the floor using screws/nails or double-sided adhesive tape. 3. Insert the carpeting into the curved side with the necessary tension. 4. Apply pressure evenly over the edge of the profile until it closes over and secures the carpeting.

PROMOQUETTE is an anodized aluminium rounded edging profile with tap-down edge, which is ideal for the clean-cut, elegant finishing of carpeted floors. The carpeting is inserted inside the curved/rounded section, which is then pressed down until the carpeting is secured, thereby also protecting the edge. **PROMOQUETTE** ensures a perfect finish, covering any flaws created during laying and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the floor.



ANODIZED GOLD and SILVER ALUMINIUM ADHESIVE
thermo packed - bar length 2,7 lm - pack 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PMQAA 12A	7/12	5,93	16,01
PMQAO 12A	7/12	5,93	16,01
PMQAB 12A	7/12	5,93	16,01
PMQAA 12	7/12	4,55	12,29
PMQAO 12	7/12	4,55	12,29

"A" at the end of the product code = item with adhesive

The code of the selected colour must be added to the article code.
E.g.: PMQ... 12A (chosen colour Anodized gold alum.) PMQAO 12A.

COLOURS

AA - Anodized silver alum.	AO - Anodized gold alum.	AB - Anodized bronze alum.
----------------------------	--------------------------	----------------------------

ANODIZED GOLD and SILVER ALUMINIUM
thermo packed - bar length 0,67 lm - pack 2 Pcs

Article	H mm	€/Pc
PMQAA 126/2	7/12	8,01
PMQAO 126/2	7/12	8,01

ANODIZED SILVER ALUMINIUM ADHESIVE
thermo packed - bar length 0,73 lm - pack 20 Pcs

Article	H mm	€/Pc
PMQAA 127AS	7/12	5,46
PMQAO 127AS	7/12	5,46

ANODIZED GOLD, SILVER and BRONZE ALUM. ADHESIVE
thermo packed - bar length 0,93 lm - pack 20 Pcs

Article	H mm	€/Pc
PMQAA 129AS	7/12	6,71
PMQAO 129AS	7/12	6,71

PROMOQUETTE FIX


ANODIZED SILVER ALUMINIUM
PUNCHED OR NOTCHED

carpet gripper profiles

PMF... 14D
scale 1:1



EXAMPLES OF LAYING

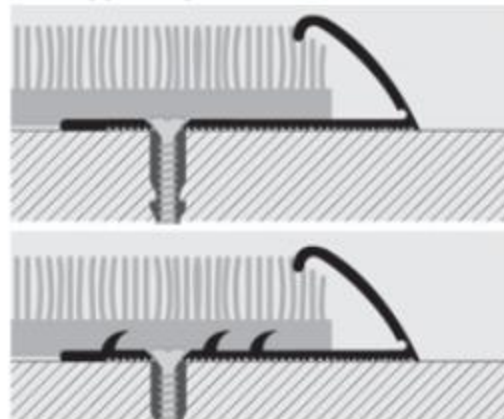

ANODIZED SILVER ALUMINIUM
thermo packed - bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PMFAA 14D	14	7,74	20,90

"D" at the end of the product code = item with notched
"P" at the end of the product code = Punched item

The code of the selected colour must be added to the article code.
E.g.: PMF... 14F (chosen colour anodized gold alum.) PMFAO 14F.

INSTRUCTIONS FOR LAYING

1. Cut the profile to the necessary length. 2. Fix the "PROMOQUETTE FIX" to the floor using screws/nails. 3. Insert the carpeting into the curved side with the necessary tension. 4. Apply pressure evenly over the edge of the profile until it closes over and secures the carpeting.

COLOURS

AA - Anodized silver alum.

PROMOQUETTE GIN is a profile in anodized aluminium with tap-down edge for edging or joining floors in carpeting, PVC, linoleum, ceramic tiles/wood, etc. Two versions are available: punched for laying under tension and then permanently fixed with screws/nails or the adhesive version for laying with glue and which can be taken up if required. **PROMOQUETTE GIN** guarantees an impeccable finish and offers the dual function of both joining and of covering any flawed edges of the floors. It speeds up laying time and the result is attractive.

PROMOQUETTE GIN

ANODIZED ALUMINIUM
WITH SELF-ADHESIVE AND PUNCHED

FLOORS



ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM ADHESIVE
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm	€/lm	€/Pc
PMGAA 813A	8/13	9,81	26,49

ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM PUNCHED
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PMGAA 813F	8/13	7,74	20,90
PMGAO 813F	8/13	7,74	20,90
PMGAB 813F	8/13	7,74	20,90
PMGAT 813F	8/13	7,74	20,90


COLOURS

AA - Anodized silver alum.	AO - Anodized gold alum.	AT - Anodized titanium alum.
AB - Anodized bronze alum.		

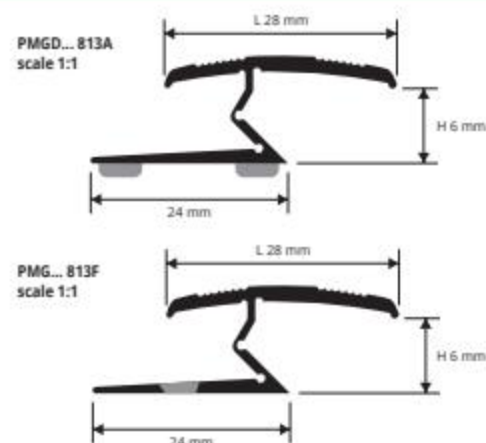

carpet gripper profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

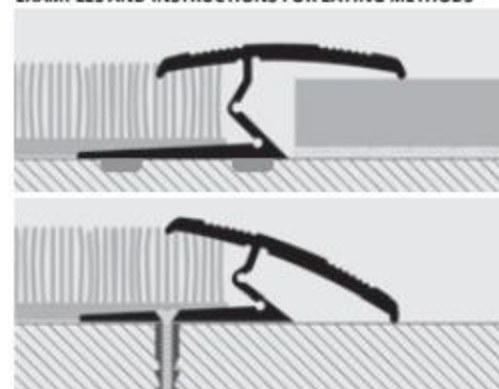

1. Cut the profile to the necessary length. 2. Fix the "PROMOQUETTE GIN" to the floor using screws/nails or two-sided adhesive tape. 3. Lay the required floor, inserting the carpeting, PVC, linoleum, ceramic tile or wood under the upper curved part. 4. Apply pressure evenly on the edges of the profile until they close and secure the flooring on both sides.





**PROENTRANCE
MATT
SYSTEM**




PROENTRANCE MATT SYSTEM

PROENTRANCE MATT SYSTEM is an entrance mat, made of aluminium guides and joined by a PVC joint. It is an effective barrier to retain dust, moisture and dirt. The strong materials used and the modern design ensure a high durability, significantly reduce the possibility of slipping. Suitable for environments subject to heavy pedestrian traffic such as airports, hotels, offices, shopping centers, shops, leisure places. Available in 4 heights: 10, 13, 17 and 22 mm.



4 HEIGHTS AVAILABLES

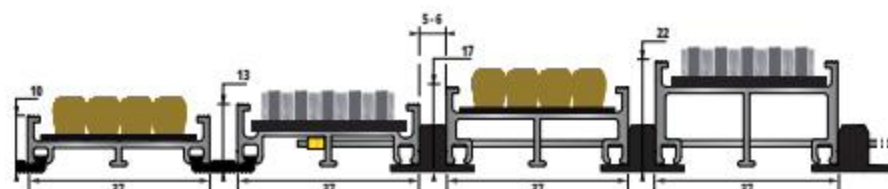

PROENTRANCE MATT BRUSH

Article	H insert mm	H total mm	Colour	€/m²
PENTSP10GC	10	15	GC	487,00 *
PENTSP10GA	10	15	GA	487,00 *
PENTSP13GC	13	17	GC	512,00 *
PENTSP13GA	13	17	GA	512,00 *
PENTSP17GC	17	21	GC	546,00 *
PENTSP17GA	17	21	GA	546,00 *
PENTSP22GC	22	26	GC	594,00 *
PENTSP22GA	22	26	GA	594,00 *



PROENTRANCE MATT BRUSH AND DRY

Article	H insert mm	H total mm	Colour	€/m²
PENTSA10GC	10	14	GC	593,00 *
PENTSA10GA	10	14	GA	593,00 *
PENTSA13GC	13	17	GC	619,00 *
PENTSA13GA	13	17	GA	619,00 *
PENTSA17GC	17	20	GC	653,00 *
PENTSA17GA	17	20	GA	653,00 *
PENTSA22GC	22	25	GC	701,00 *
PENTSA22GA	22	25	GA	701,00 *




PROENTRANCE MATT CARPET

Article	H insert mm	H total mm	Colour	€/m²
PENTMO10GC	10	14	GC	631,00 *
PENTMO10GA	10	14	GA	631,00 *
PENTMO13GC	13	17	GC	677,00 *
PENTMO13GA	13	17	GA	677,00 *
PENTMO17GC	17	20	GC	695,00 *
PENTMO17GA	17	20	GA	695,00 *
PENTMO22GC	22	25	GC	769,00 *
PENTMO22GA	22	25	GA	769,00 *



PROENTRANCE MATT SLIM SYSTEM

PROENTRANCE MATT SLIM SYSTEM is an entrance mat with raw aluminium structure glued on a polyethylene terephthalate (PET) mat. It constitutes a real cleaning barrier: it ensures optimal protection and the permanence of soils subjected to intense traffic: pedestrians, supermarket trolleys and shopping centers. Lightweight, easy to handle and easy to maintain, it is installed on the back or in a recessed position, inside or outside under shelter (as an entrance airlock).

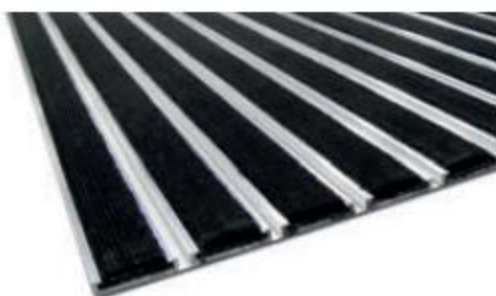

3 TYPES OF INSERT



PROENTRANCE MATT SLIM BRUSH

Article	H insert mm	H total mm	Colour	€/m²
PENTSSPGC	7,5	12	GC	504,00 *
PENTSSPGA	7,5	12	GA	504,00 *



PROENTRANCE MATT SLIM BRUSH AND DRY

Article	H insert mm	H total mm	Colour	€/m²
PENTSSAGC	7,5	11	GC	611,00 *
PENTSSAGA	7,5	11	GA	611,00 *



PROENTRANCE MATT SLIM CARPET


Article	H insert mm	H total mm	Colour	€/m²
PENTSMOGC	7,5	11	GC	643,00 *
PENTSMOGA	7,5	11	GA	643,00 *



ORDER FORM

Order form to be returned to your local agent.

Company name		Date	
First name		Ref. Building site	
Tel.		Delivery address	
E-mail		Ref. Product / Cod.Prod.	

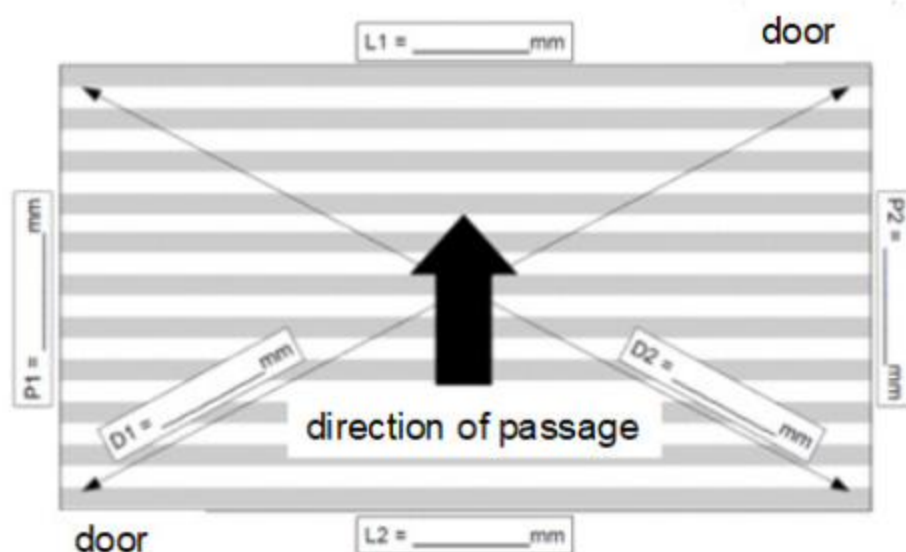

Rubber finishing profiles supplied on L1 and L2, can be cut when laying the carpet.

Please write on the floor plan the internal dimensions of the frame (we will calculate the dimensions of the carpet). Measure and write the dimensions of the 4 sides and the dimensions of the 2 diagonals of the carpet.

Legenda:

- L1 and L2 = Guide length
- P1 and P2 = Depth
- D1 and D2 = Diagonal
- Direction of passage

Important;

When the length of the rails (L1 and L2) is >3,500 mm, in case of installation of the Proentrance Matt Slim model, or >4,000 mm in case of installation of Proentrance Matt, The width of the door and its position on the floor plan must be indicated.

In case of "Irregular" dimensions or particular shapes, a cost increase of 15% will be applied on the list price.

Tolerance of production:

- Depth P1 and P2 = +/- 6 mm
- Length L1 and L2 = +/- 2 mm

Signature and stamp