




An interpretation of:

**Heydar Aliyev Cultural Center, Zaha Hadid, BAKU (Azerbaijan), 2012**

## CURVE AND BENDABLE PROFILES

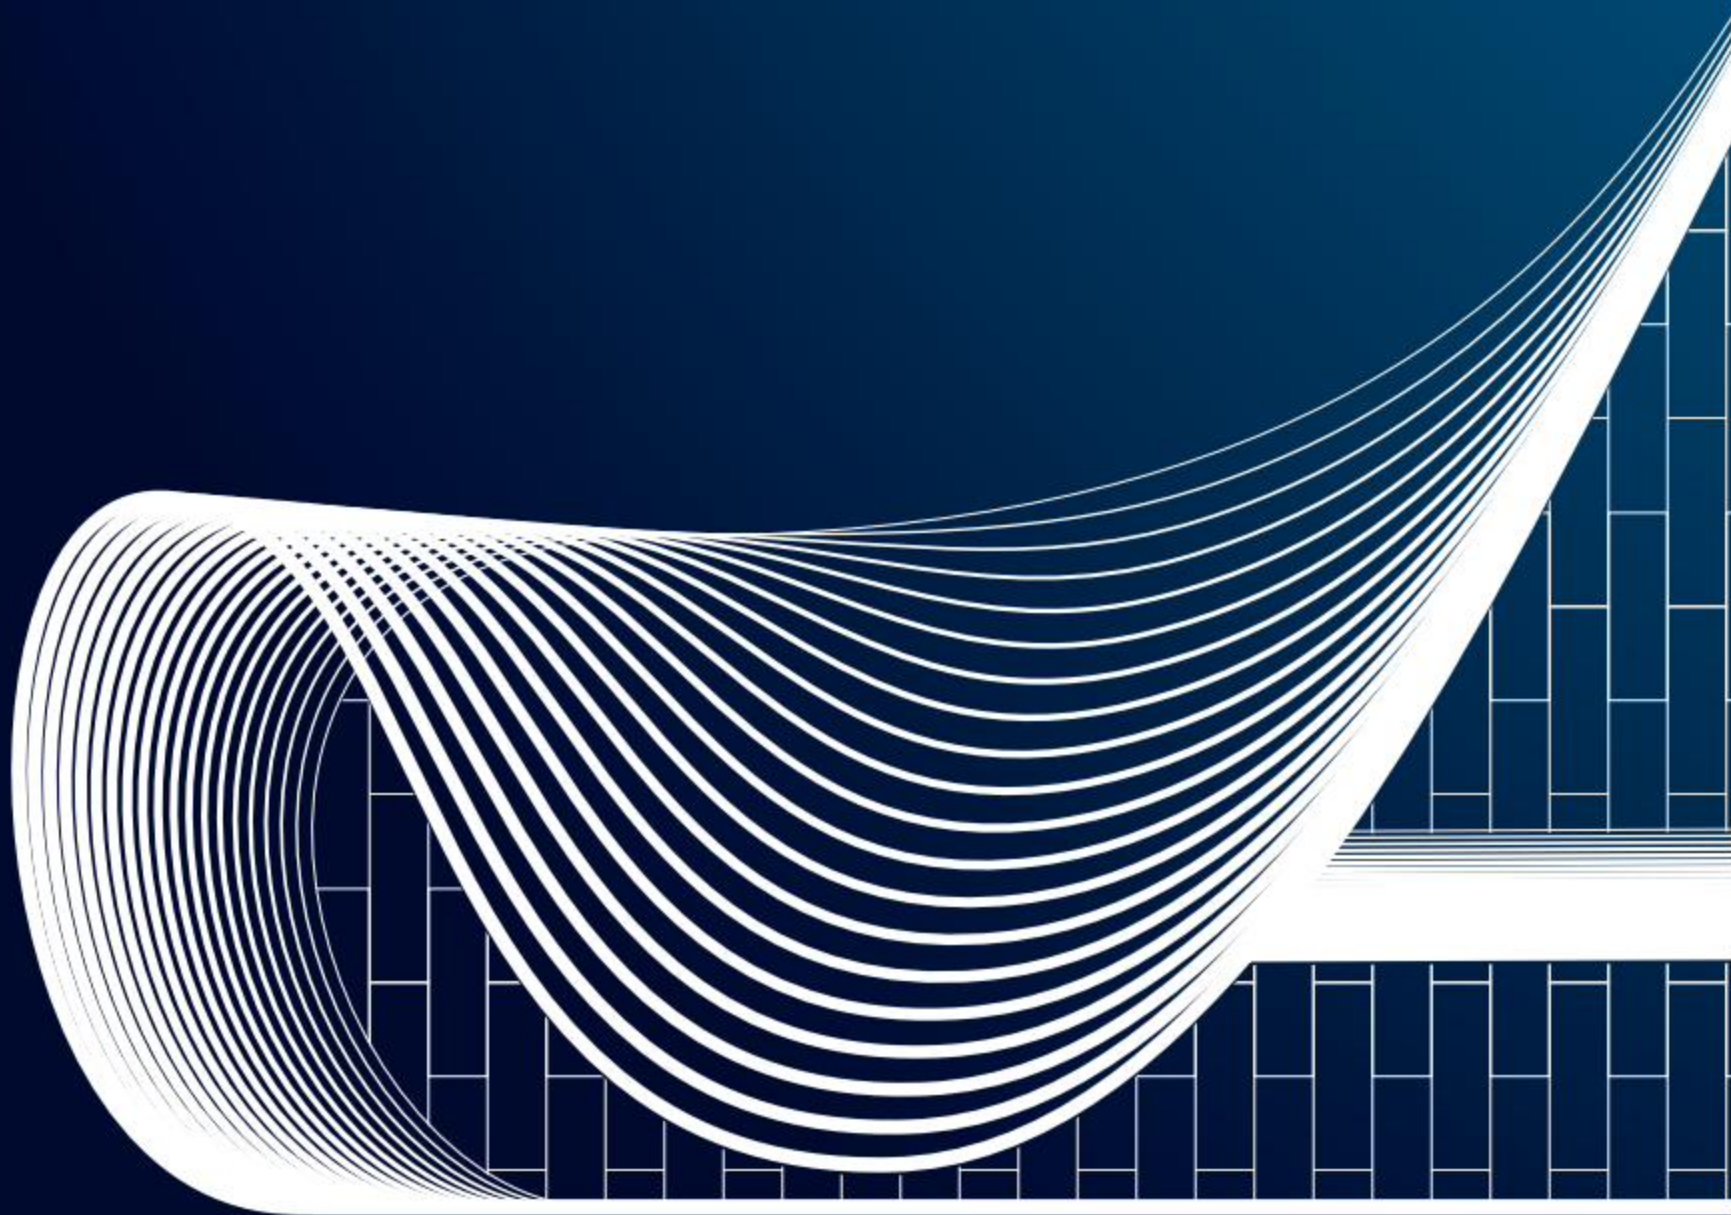

## PRO CURVE LINE


PRO CURVE LINE are a range of profiles that may be curved/shaped, with a special system of perforations allowing them to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. The profiles in the PRO CURVE LINE may be used as transition or edging profiles or to create joining and expansion joints on any type of ceramic, parquet, wood, laminate/melamine coated wood, marble, carpeted, Palladian, Venetian floor, etc. The profiles are made in AISI 304/1.4301-V2A stainless steel, aluminium and brass and may be easily shaped by using the PROCURVE MACHINE to bend the profiles mechanically.

BENDABLE


## PROTERMINAL CURVE

STAINLESS STEEL AISI 304/1.4301-V2A  
CURVABLE

PROTERMINAL CURVE are a range of edging and joining profiles that may be curved/shaped, with a special system of perforations allowing them to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm. The product is made in stainless steel AISI 304/1.4301-V2A in various heights (6, 8, 10, 12,5, 15 and 20 mm) in 2.7 m bars.

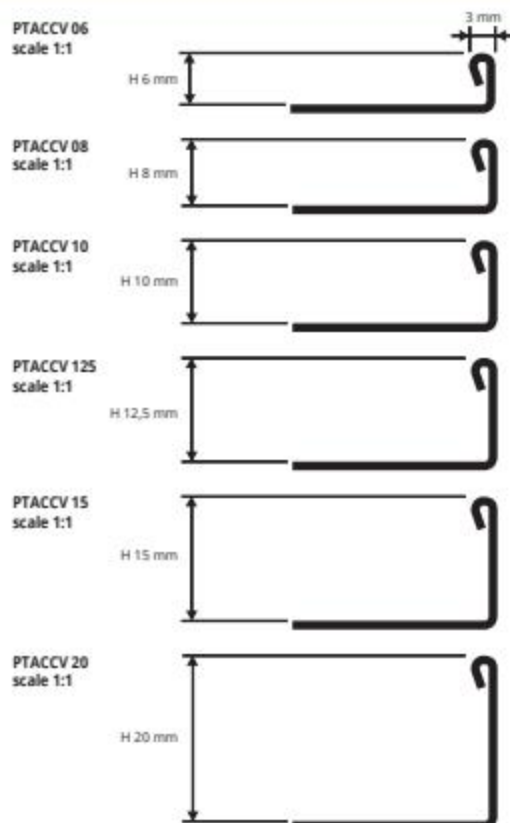

### EXAMPLES OF LAYING

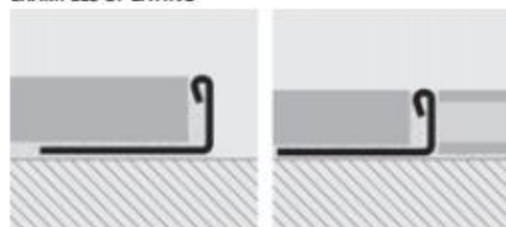

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film  
bar length 2,7 lm - pack 20 Pcs - 54 lm - 10/10 mm


| Article    | H mm | €/lm  | €/Pc  |
|------------|------|-------|-------|
| PTACCV 06  | 6    | 11,85 | 32,00 |
| PTACCV 08  | 8    | 12,17 | 32,86 |
| PTACCV 10  | 10   | 12,63 | 34,10 |
| PTACCV 125 | 12,5 | 13,10 | 35,37 |
| PTACCV 15  | 15   | 15,40 | 41,58 |
| PTACCV 20  | 20   | 16,30 | 44,01 |

### COLOURS



### LAYING INSTRUCTIONS

1. Choose the "PROTERMINAL CURVE" with the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. If it is used as a joining profile, bring each floor to the edge of the profile.

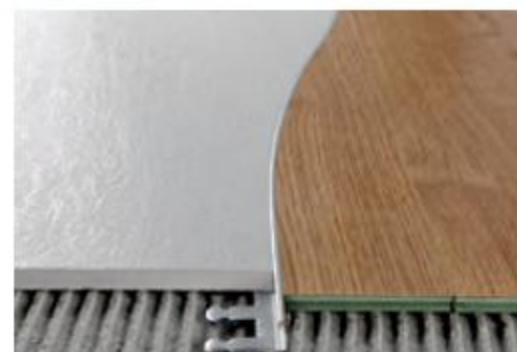

BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film  
bar length 2,7 lm - pack 20 Pcs - 54 lm - 10/10 mm

| Article     | H mm | €/lm  | €/Pc  |
|-------------|------|-------|-------|
| PTACSCV 08  | 8    | 15,83 | 42,74 |
| PTACSCV 10  | 10   | 16,43 | 44,36 |
| PTACSCV 125 | 12,5 | 17,03 | 45,98 |





SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS



**PROTERMINAL CURVE** are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm of sandable profile. The product is made in natural brass in 2.7 m bars and heights of 6, 8, 10, 12.5, 15 and 20 mm.

## PROTERMINAL CURVE


NATURAL BRASS  
CURVABLE

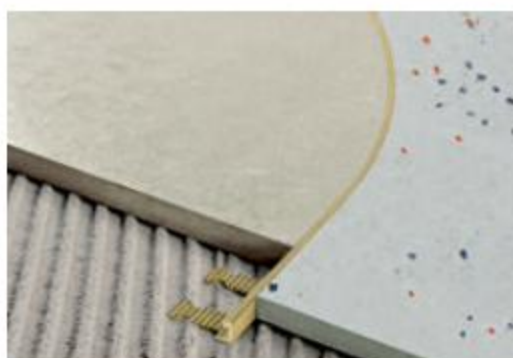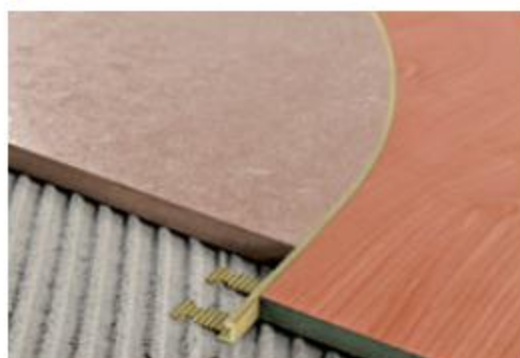

**NATURAL BRASS CURVABLE** thermo packed 10 pcs  
bar length 2,7 lm - pack. 40 Pcs - 108 lm (H:15; 20 mm - 54 lm)

| Article    | H mm | €/lm  | €/Pc  |
|------------|------|-------|-------|
| PTONCV 06  | 6    | 10,86 | 29,32 |
| PTONCV 10  | 10   | 12,02 | 32,45 |
| PTONCV 125 | 12,5 | 12,95 | 34,97 |
| PTONCV 15  | 15   | 13,89 | 37,50 |
| PTONCV 20  | 20   | 15,93 | 43,01 |

### COLOURS



ON - Natural brass



### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROTERMINAL CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidel-Smac, etc.). If it is used as a joining profile, bring each floor to the edge of the profile.

PTONCV 06  
scale 1:1



PTONCV 08  
scale 1:1



PTONCV 10  
scale 1:1




PTONCV 125  
scale 1:1



PTONCV 15  
scale 1:1



PTONCV 20  
scale 1:1


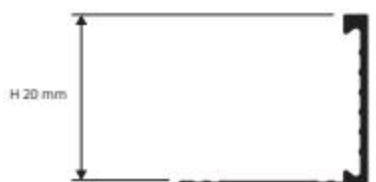


BENDABLE

**PROTERMINAL CURVE** are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm of sandable profile. The product is made in natural aluminium in 2.7 m bars and heights of 6, 8, 10, 12.5, 15 and 20 mm.

## PROTERMINAL CURVE

NATURAL ALUMINIUM  
CURVABLE

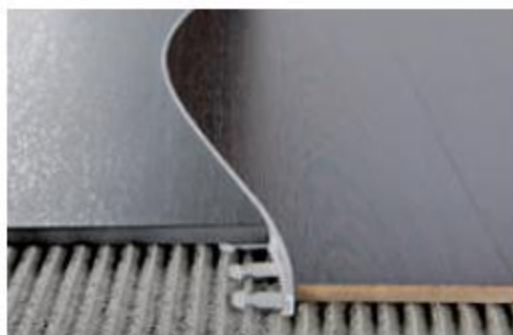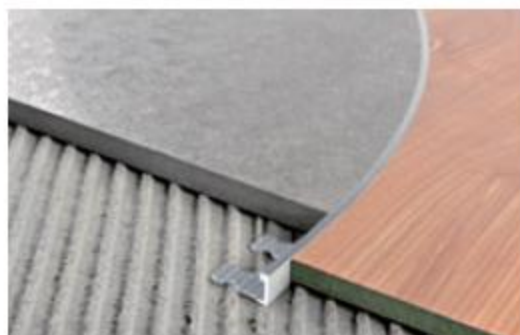

**NATURAL ALUMINIUM CURVABLE** thermo packed 10 Pcs  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article    | H mm | €/lm | €/Pc  |
|------------|------|------|-------|
| PTANCV 06  | 6    | 4,28 | 11,56 |
| PTANCV 08  | 8    | 4,50 | 12,15 |
| PTANCV 10  | 10   | 4,61 | 12,45 |
| PTANCV 125 | 12,5 | 4,77 | 12,88 |
| PTANCV 15  | 15   | 5,12 | 13,82 |
| PTANCV 20  | 20   | 5,81 | 15,69 |

### COLOURS



AN - Natural aluminium

AA - Anodized silver alum.



### EXAMPLES OF LAYING (for laying instructions, see above)



PTANCV 06  
scale 1:1



PTANCV 08  
scale 1:1



PTANCV 10  
scale 1:1



PTANCV 125  
scale 1:1



PTANCV 15  
scale 1:1



PTANCV 20  
scale 1:1




# PROLEVIGAL CURVE

BRASS, NATURAL ALUMINIUM

**PROLEVIGAL** are separating profiles used to create the technical joint in the special types of pavements such as marble- Venice- palladium ones, that must be smoothed after their laying process. The particular "L" shape with the cut/drilled base and 2,5 mm thick vertical edge consent the perfect smoothing and constant thickness as well. Available in natural aluminium and natural brass, various thickness.

BENDABLE

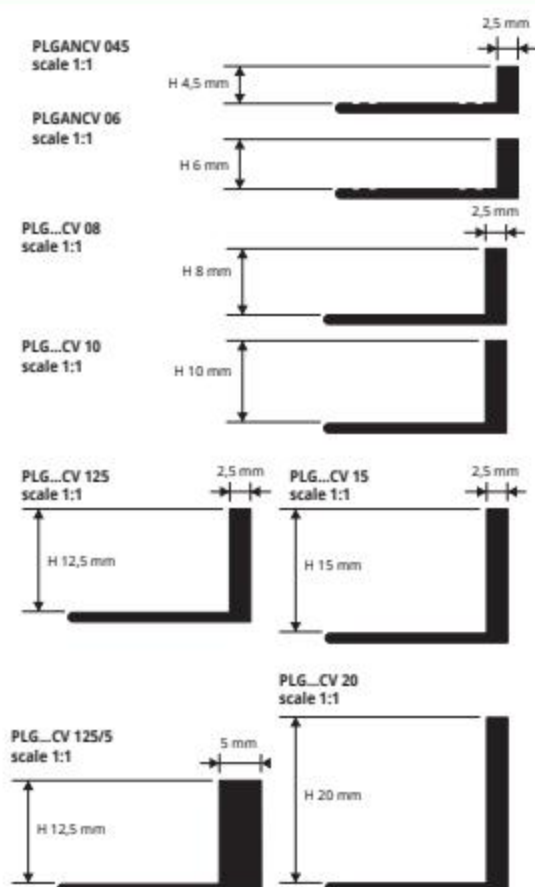

**NATURAL BRASS thermo packed 10 Pcs**  
bar length 2,7 lm - pack 20 Pcs - 54 lm

| Article       | H mm | €/lm  | €/Pc  |
|---------------|------|-------|-------|
| PLGONCV 08    | 8    | 14,14 | 38,18 |
| PLGONCV 10    | 10   | 14,73 | 39,77 |
| PLGONCV 125   | 12,5 | 15,74 | 42,50 |
| PLGONCV 125/5 | 12,5 | 30,54 | 82,46 |
| PLGONCV 15    | 15   | 17,10 | 46,17 |
| PLGONCV 20    | 20   | 20,12 | 54,32 |



**NATURAL ALUMINIUM thermo packed 10 Pcs**  
bar length 2,7 lm - pack 40 Pcs - 108 lm

| Article     | H mm | €/lm | €/Pc  |
|-------------|------|------|-------|
| PLGANCV 045 | 4,5  | 3,61 | 9,75  |
| PLGANCV 06  | 6    | 3,93 | 10,61 |
| PLGANCV 08  | 8    | 4,39 | 11,85 |
| PLGANCV 10  | 10   | 4,47 | 12,07 |
| PLGANCV 125 | 12,5 | 4,90 | 13,23 |
| PLGANCV 15  | 15   | 5,41 | 14,61 |
| PLGANCV 20  | 20   | 6,26 | 16,90 |

## COLOURS




© 2020 All rights reserved by Progress Profiles, Printed in Italy



**PROELEGANT CURVE** are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 6 mm of sandable profile. The product is made in natural brass in 2.7 m bars and heights of 8-10-12.5 and 14 mm.

## PROELEGANT CURVE

NATURAL BRASS  
CURVABLE

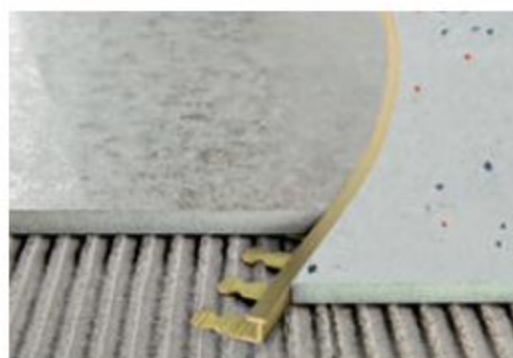

**NATURAL BRASS CURVABLE** thermo packed 5 Pcs  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

| Article     | H mm | €/lm  | €/Pc  |
|-------------|------|-------|-------|
| PELONCV 08  | 8    | 18,10 | 48,87 |
| PELONCV 10  | 10   | 18,74 | 50,60 |
| PELONCV 125 | 12,5 | 19,39 | 52,35 |
| PELONCV 14  | 14   | 20,98 | 56,65 |

### COLOURS



PELONCV 08  
scale 1:1



PELONCV 10  
scale 1:1



PELONCV 125  
scale 1:1



PELONCV 14  
scale 1:1



### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROELEGANT CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidel-Smac, etc.).

**PROELEGANT CURVE** are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 6 mm of sandable profile. The product is made in silver anodized aluminium in 2.7 m bars and heights of 8-10-12.5 mm.

## PROELEGANT CURVE

ANODIZED SILVER ALUMINIUM  
CURVABLE



**ANODIZED SILVER ALUMINIUM CURVABLE** thermo packed  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

| Article     | H mm | €/lm | €/Pc  |
|-------------|------|------|-------|
| PELAACV 08  | 8    | 8,57 | 23,14 |
| PELAACV 10  | 10   | 8,85 | 23,90 |
| PELAACV 125 | 12,5 | 9,26 | 25,00 |

### COLOURS



PELAACV 08  
scale 1:1



PELAACV 10  
scale 1:1



PELAACV 125  
scale 1:1



### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROELEGANT CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidel-Smac, etc.).

## PROFINAL CURVE

NATURAL BRASS  
CURVABLE

**PROFINAL CURVE** are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 8 mm of sandable profile. The product is made in natural brass in 2.7 m bars and heights of 8, 10 and 12.5 mm.


PRFONCV 10  
scale 1:1




PRFONCV 125  
scale 1:1



### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

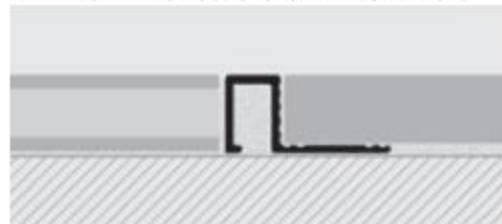

1. Choose the "PROFINAL CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidel-Smac, etc.). If it is used as a joining profile, bring each floor to the edge of the profile.

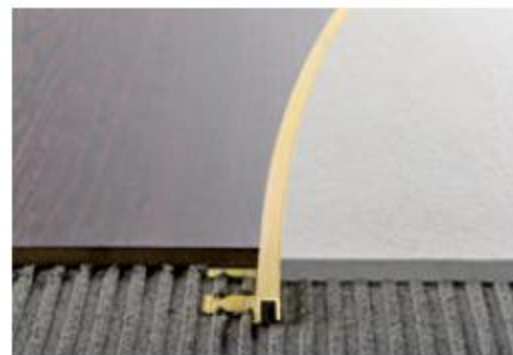

**NATURAL BRASS CURVABLE** thermo packed 5 Pcs  
bar length 2,7 lm - pack 20 Pcs - 54 lm

| Article     | H mm | €/lm  | €/Pc  |
|-------------|------|-------|-------|
| PRFONCV 10  | 10   | 21,71 | 58,62 |
| PRFONCV 125 | 12,5 | 23,74 | 64,10 |

### COLOURS



ON - Natural brass




## PROFINAL CURVE

ANODIZED SILVER ALUMINIUM  
CURVABLE

**PROFINAL CURVE** are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 8 mm of sandable profile. The product is made in silver anodized aluminium in 2.7 m bars and heights of 8, 10 and 12.5 mm.

PRFAACV 08  
scale 1:1



PRFAACV 10  
scale 1:1




PRFAACV 125  
scale 1:1



### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROFINAL CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidel-Smac, etc.). If it is used as a joining profile, bring each floor to the edge of the profile.

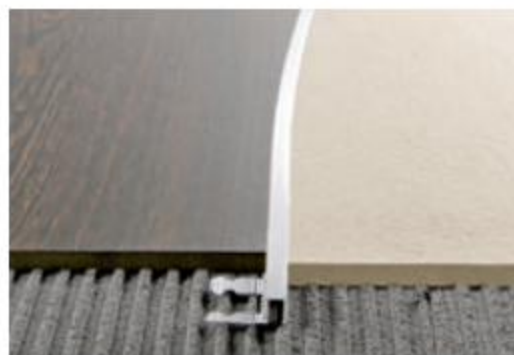

**ANODIZED SILVER ALUMINIUM CURVABLE**  
thermo packed - bar length 2,7 lm - pack 20 Pcs - 54 lm

| Article     | H mm | €/lm  | €/Pc  |
|-------------|------|-------|-------|
| PRFAACV 08  | 8    | 9,26  | 25,00 |
| PRFAACV 10  | 10   | 9,74  | 26,30 |
| PRFAACV 125 | 12,5 | 10,09 | 27,24 |

### COLOURS



AA - Anodized silver alum.






**PROJOLLY CURVE** is a range of terminal transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. It is made in natural brass, height H 8 - H 10mm, length 2.7 lm.

## PROJOLLY CURVE

NATURAL BRASS  
CURVABLE

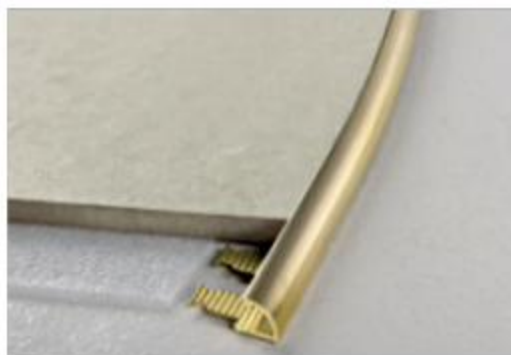

PJONCV 08  
scale 1:1



PJONCV 10  
scale 1:1



BENDABLE

**NATURAL BRASS CURVABLE** thermo packed 5 Pcs  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

| Article   | H mm | €/lm  | €/Pc  |
|-----------|------|-------|-------|
| PJONCV 08 | 8    | 20,54 | 55,46 |
| PJONCV 10 | 10   | 21,87 | 59,05 |

### COLOURS



### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROJOLLY CURVE" in the required height and material.
2. Cut the profile to the necessary length, calculating the total length.
3. Bend the profile mechanically with the PROCURVE MACHINE.
4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive.

**PROJOLLY CURVE** is a range of terminal transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. It is made in anodized aluminium, height H 8 - H 10mm, length 2.7 lm.

## PROJOLLY CURVE

ANODIZED SILVER ALUMINIUM  
CURVABLE



PJAACV 08  
scale 1:1



PJAACV 10  
scale 1:1



**ANODIZED SILVER ALUMINIUM CURVABLE** thermo packed  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

| Article   | H mm | €/lm | €/Pc  |
|-----------|------|------|-------|
| PJAACV 08 | 8    | 7,48 | 20,20 |
| PJAACV 10 | 10   | 7,95 | 21,47 |

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "PROJOLLY CURVE" in the required height and material.
2. Cut the profile to the necessary length, calculating the total length.
3. Bend the profile mechanically with the PROCURVE MACHINE.
4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive.



# TERMINAL CURVE

ANODIZED SILVER ALUMINIUM

**TERMINAL CURVE** is a range of edging and joining profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. Recommended for edging and/or joining floating floors in wood & melamine-laminated wood. It is made in anodized aluminium and in 10 wood effect finishes; it comes in various heights, length 2.7m.

PINT... CV 07  
scale 1:1



PINT... CV 11  
scale 1:1



**ANODIZED SILVER ALUMINIUM CURVABLE thermo packed**  
bar length 2,7 lm - pack 20 Pcs - 54 lm

| Article     | H mm | €/lm | €/Pc  |
|-------------|------|------|-------|
| PINTAACV 07 | 7    | 8,09 | 21,84 |
| PINTAACV 11 | 11   | 8,36 | 22,57 |

COLOURS



AA - Anodized silver alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "TERMINAL CURVE" in the required height and material. 2. Cut the profile to the necessary length, calculating the total length. 3. Bend the profile mechanically with the PROCURVE MACHINE. 4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive.

# PROSLIDER CURVE

ANODIZED SILVER ALUMINIUM CURVABLE

**PROSLIDER CURVE** is a range of transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. Recommended for joining floating floors in wood, melamine laminated wood and ceramics. It is made in anodized aluminium in various heights, length 2.7 lm.

PDAACV 08  
scale 1:1



PDAACV 10  
scale 1:1



**ANODIZED SILVER ALUMINIUM CURVABLE thermo packed**  
bar length 2,7 lm - pack 20 Pcs - 54 lm

| Article   | H mm | €/lm  | €/Pc  |
|-----------|------|-------|-------|
| PDAACV 08 | 8    | 10,17 | 27,46 |
| PDAACV 10 | 10   | 11,74 | 31,70 |

COLOURS



AA - Anodized silver alum.

# PROCURVE MACHINE

**PROCURVE MACHINE** is a manual profile bending machine for profiles of the CURVE SERIES. complete with wheels for all profiles

| Article |                  | €/Pc     |
|---------|------------------|----------|
| PCM 08  | PROCURVE MACHINE | 1.090,12 |



| Page | Items / series available for | MINIMUM INSIDE RADIUS | MINIMUM OUTSIDE RADIUS |
|------|------------------------------|-----------------------|------------------------|
| 114  | PTACCV                       | 30 cm                 | 30 cm                  |
| 115  | PTONCV                       | 30 cm                 | 30 cm                  |
| 115  | PTANCV                       | 30 cm                 | 30 cm                  |
| 117  | PELONCV                      | 150 cm                | 300 cm                 |
| 117  | PELAACV                      | 200 cm                | 300 cm                 |
| 118  | PRFONCV                      | 200 cm                |                        |
| 118  | PRFAACV                      | 200 cm                |                        |
| 119  | PJONCV                       | 200 cm                | 300 cm                 |
| 119  | PJAACV                       | 200 cm                | 300 cm                 |
| 120  | PINTAACV                     | 300 cm                |                        |
| 120  | PDAACV                       | 300 cm                |                        |
| 97   | PCRAA 149                    | 80 cm                 | 80 cm                  |
| 97   | PCRA... 149                  | 100 cm                | 100 cm                 |

