



An interpretation of:
Elbphilharmonie, Herzog & De Meuron, HAMBURG (Germany), 2017


STAIR NOSINGS PROFILES

PROSTAIR ACC

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

PROSTAIR ACC is steps protecting technical profile, designed and conceived to make the step scales made of ceramic, porcelain stoneware and others nonskid and non-slip ones ; it's to be applied before the step laying process. Manufactured in aisi 304/1.4301-V2A glazed stainless steel, with the superior side level crimped in order to increase its adhesion. It replaces special ceramic elements in refined, resistant and economic way. It is compulsory in public places for the accident prevention. It is recommended for elegant, refined industrial, commercial and private environments: available in H 4,5-6-8-10-12,5-15 mm versions. Combining with the entire series of steel profiles recommended.

STEPS

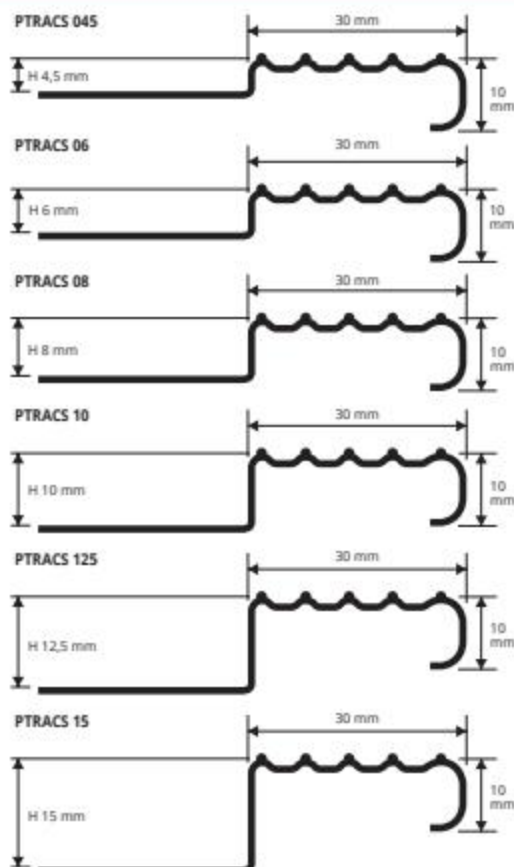

EXAMPLES OF LAYING




BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack: 15 Pcs - 40,5 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PTRACS 06	6	17,60	47,52
PTRACS 08	8	18,01	48,63
PTRACS 10	10	18,55	50,09
PTRACS 125	12,5	19,21	51,87
PTRACS 15	15	20,13	54,35



END CAP IN VARNISHED PLASTIC BRUSHED STAINLESS STEEL EFFECT
pack: 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack.
TPTRACS/1	4,5 ÷ 15	3,38

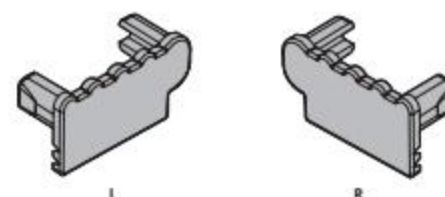


LAYING INSTRUCTIONS

1. Choose the PROSTAR ACC of the desired height and material on the basis of the tile (steps) thickness. 2. Fix the first rising part laying it down at its appropriate and definitive level. 3. Fill completely the empty spaces under the profile with the tile adhesive. 4. Spread out the adhesive on the tread, lay down the profile with its cut base immersed completely in adhesive and align it so that the profile covers the riser tile edge. 5. Lay down the tread tiles and align them with the superior grazing part of the profile by drawing its back close and filling the inner space with the adhesive.

COLOURS



ACS - Brushed stainless st. AISI 304/1.4301-V2A

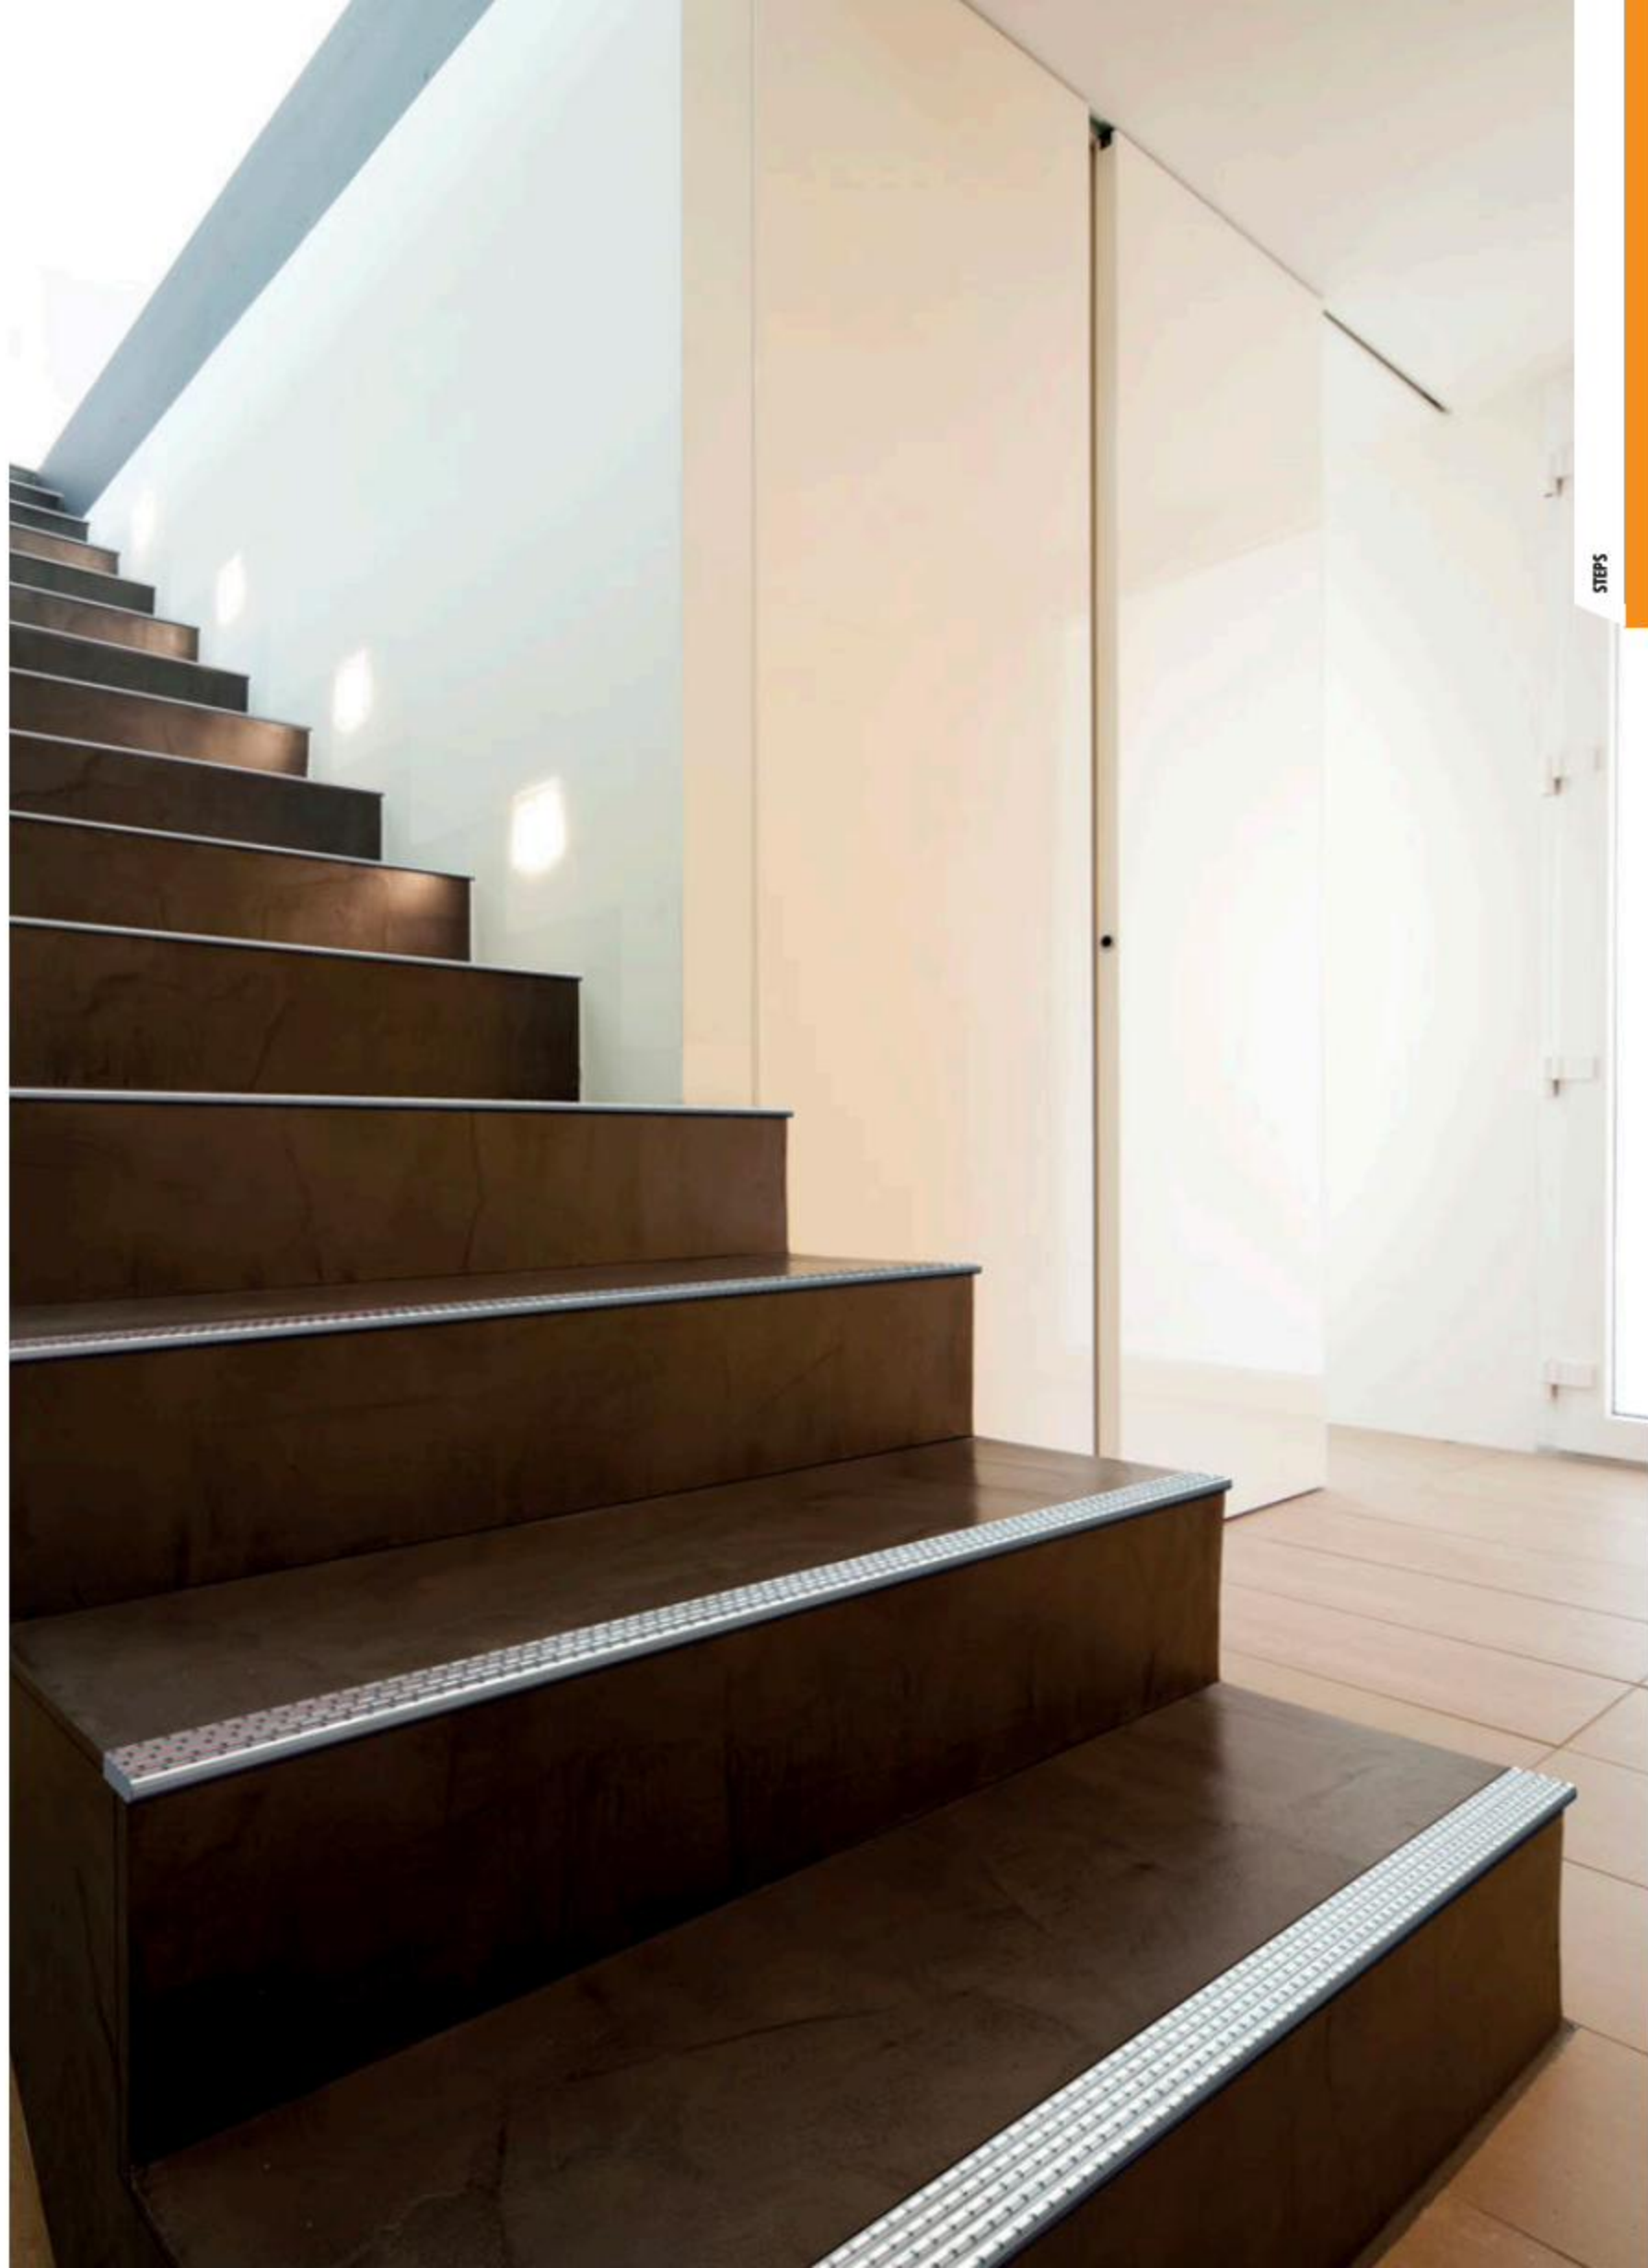




PROSTAIR GRIP ACC is an AISI 304/1.4301-V2A brushed stainless steel profile, consisting of a punched flange, ensuring perfect anchorage to the substrate, a 36,5 and 56,5mm horizontal visually exposed surface with the carborundum stripe insert and a 20mm vertical visually exposed flat surface. The profile is available in the heights 4,5/6/8/10/12,5/15/20 mm and is equipped with end caps made of varnished plastic in brushed steel-effect finish. The design of this profile together with the completing elements make it an elegant and appreciated solution also for modern stairs.

PROSTAIR GRIP ACC


BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A



PTRGRACS ...35

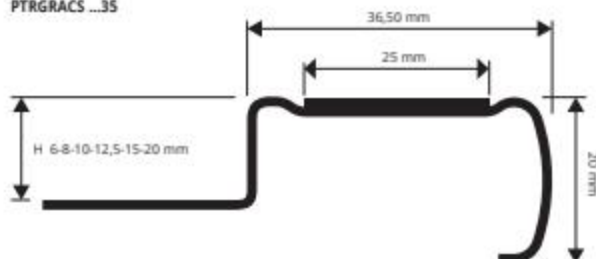

PTRGRACS ...55

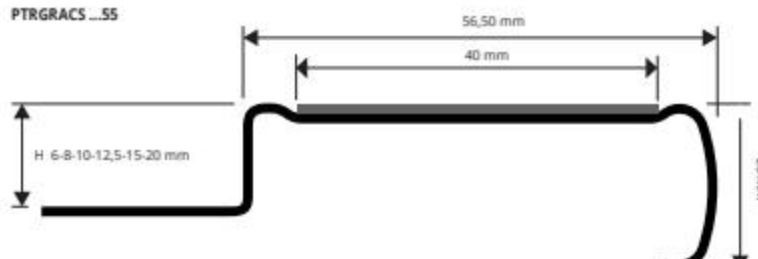

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length 2,7 lm - width 36,50 mm

Article	H mm	Pcs/Pack	€/lm	€/Pc
PTRGRACS 0635	6	20	34,40	92,88
PTRGRACS 0835	8	20	34,72	93,74
PTRGRACS 1035	10	10	36,51	98,58
PTRGRACS 12535	12,5	10	38,63	104,30
PTRGRACS 1535	15	7	40,81	110,19
PTRGRACS 2035	20	7	44,71	120,72

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length 2,7 lm - width 56,50 mm

Article	H mm	Pcs/Pack	€/lm	€/Pc
PTRGRACS 0655	6	20	41,64	112,43
PTRGRACS 0855	8	20	42,60	115,02
PTRGRACS 1055	10	10	44,20	119,34
PTRGRACS 12555	12,5	10	46,76	126,25
PTRGRACS 1555	15	7	48,68	131,44
PTRGRACS 2055	20	7	52,52	141,80

THE ADHESIVE CARBORUNDUM STRIP (PROGRIP) IS NOT INCLUDED WITH THE PROFILE.

FOR PTRGRACS ...35 ORDER PGR... 25 (SPECIFY THE CHOSEN COLOUR).

FOR PTRGRACS ...55 ORDER PGR... 40 (SPECIFY THE CHOSEN COLOUR).

COLOURS




ACS - Brushed stainless st. AISI 304/1.4301-V2A

END CAPS - R/L - pack. 2 Pcs (1 R and 1 L)

Article	H mm	L mm	€/Pack.
TPTRGRACS 55/1	4,5+20	56,5	3,21
TPTRGRACS 35/1	4,5+20	36,5	3,21



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

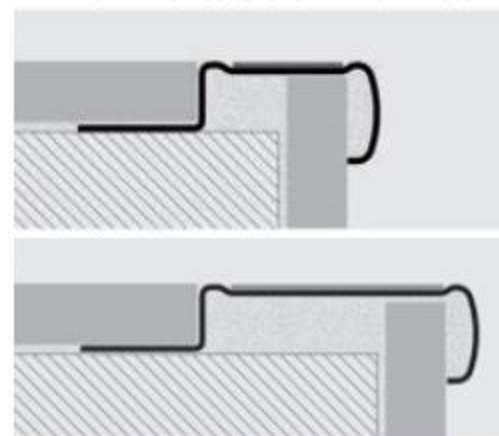

1. Choose the PROSTAIR GRIP ACC in the required height, according to the thickness of the floor covering and the desired profile width;
2. Lay the floor covering on the stair riser and apply the adhesive on the of stair tread, where the profile will be installed;
3. Fill the empty spaces under the profile with the adhesive for tiles. Lay the profile on the step tread, making sure that it is aligned with the stair riser;
4. Lay the floor covering on the stair tread and align;
5. Plaster the joints between the profile and the tiles.

PROGRIP is a carborundum adhesive stripe, consisting of an elastic film coated with high wear resistant abrasive grains. It is usually employed in public as well as in domestic environments to make stair steps non-slip. The stripe is available in different colors and widths to meet any technical and aesthetic requirement. If **PROGRIP** is applied directly on the step covering, it is advisable to apply two stripes on each step, rounding their ends.

PROGRIP

ADHESIVE CARBORUNDUM - 7 COLOURS

ADHESIVE NON-SLIP STRIP for STEPS - rolls length 18,2 lm

Article	Width mm	€/lm	€/Roll
PGRN 25	25	2,76	50,23
PGRG 25	25	4,70	85,54
PGRY 25	25	4,55	82,81
PGRN 40	40	4,14	75,35
PGRG 40	40	8,25	150,15
PGRY 40	40	8,25	150,15



COLOURS




PROSTYLE GRIP ACC

BRUSHED STAINLESS STEEL
AISI 304/1.4301-V2A


PROSTYLE GRIP ACC is a non-slip profile in AISI 304/1.4301-V2A brushed stainless steel, consisting of a 40 or 60 mm horizontal top with a groove for the insertion of a non-slip carborundum stripe and a 20mm vertical flat side. The profile can be fixed with adhesive film or with screws. The particular design of this profile makes it an elegant and appreciated solution also for modern stairs.

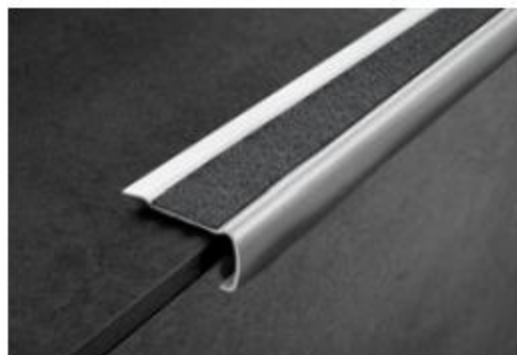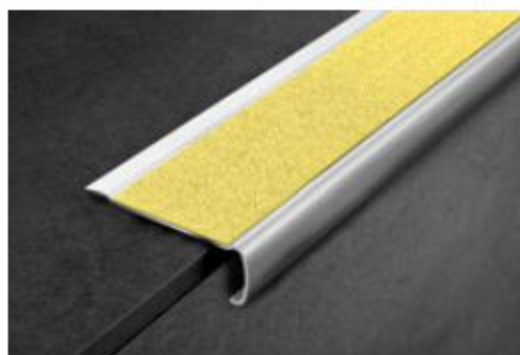


PSYGRACS 6020
scale 1:1

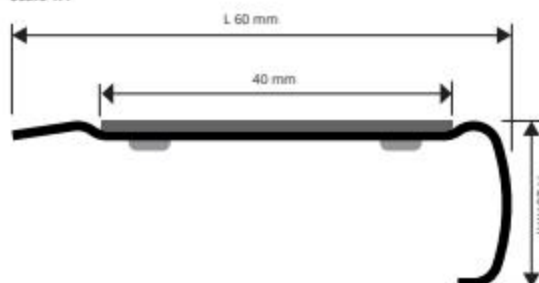

PSYGRACS 4020
scale 1:1

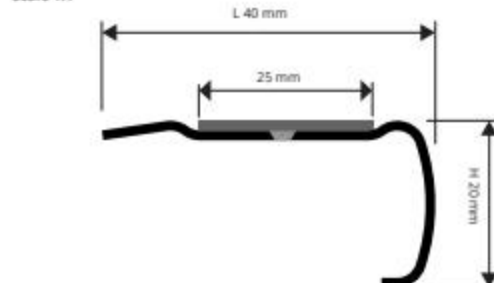

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

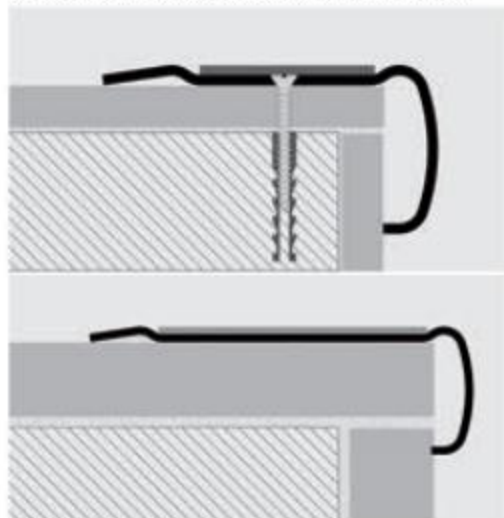

Version with adhesive

1. Choose the profile according to the desired width and cut it to the necessary length; 2. Clean the surface on which the profile is to be laid, ensuring that it is dry. Remove the protective film and place the profile, applying adequate pressure on it; 3. Apply the adhesive non-slip carborundum insert of the desired color.

Punched version

1. Choose the profile according to the desired width and cut it to the necessary length; 2. Mark the position of the holes using the existing holes on the profile as reference; 3. Drill the step using a drill with 5mm diameter and insert the 5x 25mm screws; 4. Screw the profile to the step; 5. Apply the adhesive non-slip carborundum insert of the desired color.

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSYGRACS 6020A	60	37,03	99,98
PSYGRACS 6020F	60	35,35	95,45

Without adhesive version deduct 3,00 €/LM to the gross price

The adhesive carborundum strip (PROGRIP) is not included with the profile.

For PSYGRACS 6020A/F order PGR... 40 (Specify the chosen colour).

For PSYGRACS 4020A/F order PGR... 25 (Specify the chosen colour).

COLOURS



BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSYGRACS 4020A	40	31,39	84,75
PSYGRACS 4020F	40	29,46	79,54

Without adhesive version deduct 3,00 €/LM to the gross price

END CAPS STAINLESS STEEL - R/L - pack. 2 Pcs - (1 R and 1 L)

Article	L mm	€/Pack.
TPSYGRACS 6020/1	60	3,38
TPSYGRACS 4020/1	40	3,38

Articles not for sale singly

**6020A/6020F - ITEM AVAILABLE
WHILE STOCKS LAST.**

PROGRIP

ADHESIVE CARBORUNDUM - 7 COLOURS

PROGRIP is a carborundum adhesive stripe, consisting of an elastic film coated with high wear resistant abrasive grains. It is usually employed in public as well as in domestic environments to make stair steps non-slip. The stripe is available in different colors and widths to meet any technical and aesthetic requirement. If **PROGRIP** is applied directly on the step covering, it is advisable to apply two stripes on each step, rounding their ends.



ADHESIVE NON-SLIP STRIP for STEPS - rolls length 18,2 lm

Article	Width mm	€/lm	€/Roll
PGRN 25	25	2,76	50,23
PGRG 25	25	4,70	85,54
PGRY 25	25	4,55	82,81
PGRN 40	40	4,14	75,35
PGRG 40	40	8,25	150,15
PGRY 40	40	8,25	150,15

COLOURS



PROSTAIR 50 is a technical square used to make the step nonskid and non-slip, protects the ceramic stairs steps preventing from accidents. It is made up of a rigid aluminium base equipped with a particular toothing on the vertical stem which strengthens the anchorage of the adhesive/tile to the square. The aluminium base varies according to the thickness of the tile used in the step, and to a lined insert in vinyl rubber available in several colors. The insert is already applied to the aluminium base. It is compulsory in public places in compliance with EEC norms and prevents from accidents.

PROSTAIR 50

NATURAL ALUMINIUM
+ VINYL RESIN / RUBBER INSERT



NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PTR50 10...	10	22,98	62,05
PTR50 125...	12,5	23,69	63,96
PTR50 15...	15	24,91	67,26

The code of the selected colour must be added to the article code.
E.g.: PTR50 08... (chosen colour grey) PTR50 08G.





COLOURS

G - Gray (E83)	N - Black (E85)	B - Beige (E84)
----------------	-----------------	-----------------

END CAP IN PVC - pack. 2 Pcs (1 R and 1 L)

Article	H mm	€/Pack.
TPTR 50.../1	10-12,5-15	3,38

The code of the selected colour must be added to the article code.
E.g.: TPTR50 ... (chosen colour grey) TPTR50 G.
Articles not for sale singly

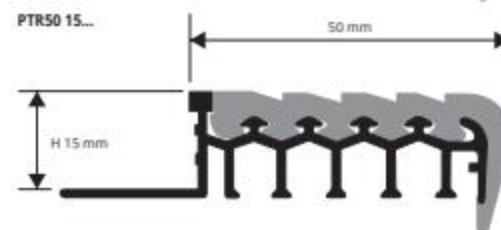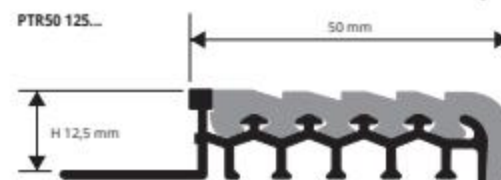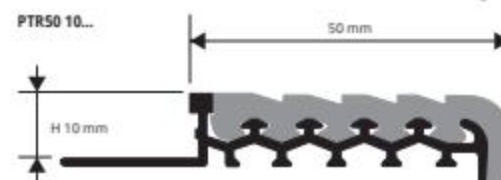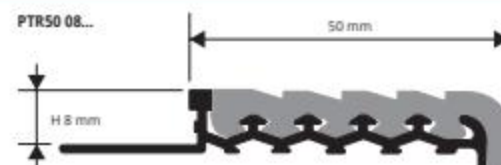

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose a PROSTAIR 50 height and color corresponding to the thickness of the tile. 2. Fix the riser laying it at the appropriate and definitive height. 3. Fill the empty spaces under the square completely with adhesive. 4. Rest the adhesive on the tread, lay the square with the base cut in the adhesive and line it up so that the square covers the tile edge of the riser. 5. Lay the tiles of the tread lining them up with upper part of the square so that it meets with the edge.

INTERCHANGEABLE INSERT for Prostair 50

VINYL RESIN / RUBBER

INTERCHANGEABLE VINYL RESIN / RUBBER INSERT
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PTG50 ...	10-12,5-15	7,66	20,68


Universal insert suitable for four profile heights.
The code of the selected colour must be added to the article code.
E.g.: PTG50... (chosen colour grey) PTG50 G.



PROSTAIR

NATURAL ALUMINIUM
+ VINYL RESIN / RUBBER INSERT

PROSTAIR is a step nosing profile used to improve slip and slide resistance on the step, to protect ceramic steps and to prevent accidents. It consists of a rigid aluminium base and a changeable vinyl rubber insert available in various colours and widths. Compulsory in public environments to comply with EEC accident-prevention standards.

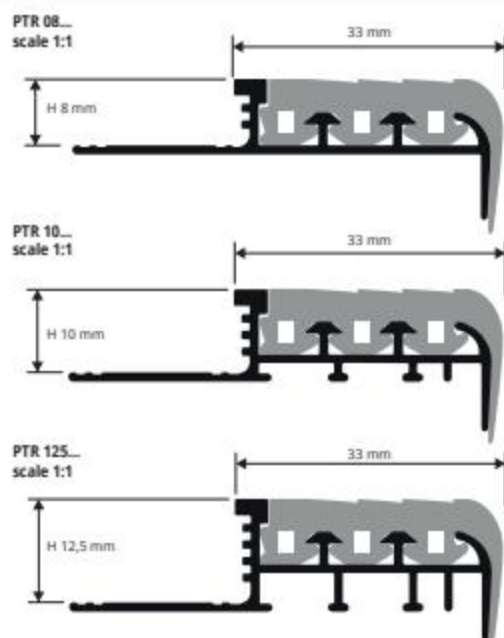

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROSTEP/PROSTAIR in the required width and colour according to the thickness of the tile. 2. First fix the riser part, placing it at the correct and final height. 3. Fill the empty spaces under the profile with the tile adhesive. 4. Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile. 5. Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile.



INTERCHANGEABLE VINYL RESIN / RUBBER INSERT

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	€/lm	€/Pc
PTGRB	4,73	12,77
PTGRN	4,73	12,77
PTGRG	4,73	12,77



COLOURS

G - Gray (E83)	N - Black (E85)	B - Beige (E84)
----------------	-----------------	-----------------

NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT

bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PTR 08...	8	13,87	37,45
PTR 10...	10	14,98	40,45
PTR 125...	12,5	15,48	41,80

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code.
E.g.: PTR 08... (chosen colour grey) PTR 08G.

END CAP IN PVC - pack. 2 Pcs (1 R and 1 L)

Article	€/Pack.
TPT .../1	3,38


Available in the colours: G - N - B.
E.g.: TPT G/1.



PROSTEP

RIGID VINYL RESIN
+ VINYL RESIN / RUBBER INSERT

PROSTEP is a step nosing profile used to improve slip and slide resistance on the step, to protect ceramic steps and to prevent accidents. It consists of a rigid base in high-strength vinyl resin and a changeable vinyl rubber insert available in various colours and widths. Compulsory in public environments to comply with EEC accident-prevention standards.

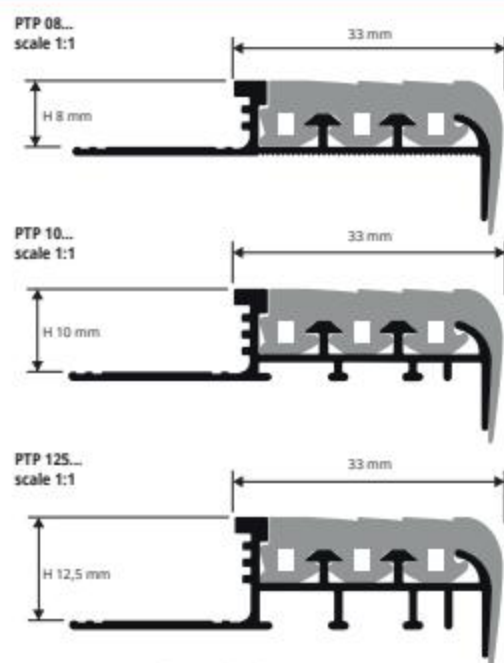

For instructions see the product above



INTERCHANGEABLE VINYL RESIN / RUBBER INSERT

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	€/lm	€/Pc
PTGRB	4,73	12,77
PTGRN	4,73	12,77
PTGRG	4,73	12,77



COLOURS

G - Gray (E83)	N - Black (E85)	B - Beige (E84)
----------------	-----------------	-----------------

IMPACT PROOF VINYL RESIN + VINYL RESIN / RUBBER INSERT

bar length 2,7 lm - pack. 10 Pcs - 27 lm (PTP 08... - 54 lm)

Article	H mm	€/lm	€/Pc
PTP 08...	8	6,94	18,74
PTP 10...	10	7,66	20,68
PTP 125...	12,5	8,34	22,52

Available in the colours: G - N - B.
The code of the selected colour must be added to the article code.
E.g.: PTP 08... (chosen colour grey) PTP 08G.

END CAP IN PVC - pack. 2 Pcs (1 R and 1 L)

Article	€/Pack.
TPT .../1	3,38


Available in the colours: G - N - B.
E.g.: TPT G/1.
Articles not for sale singly



PROBRASTEP is a very elegant step nosing profile used to improve slip and slide resistance on the step. Made in natural and polished brass or natural and anodized silver aluminium, the upper part is knurled to increase adherence. Compulsory in public buildings to comply with accident-prevention regulations. Recommended for elegant, refined surroundings and for steps in wood, tiles, melamine-coated/laminated wood, marble or natural stones. Width: 8, 10, 12.5 mm.

PROBRASTEP

KNURLED NATURAL BRASS
NATURAL AND ANODIZED SILVER ALUMINIUM

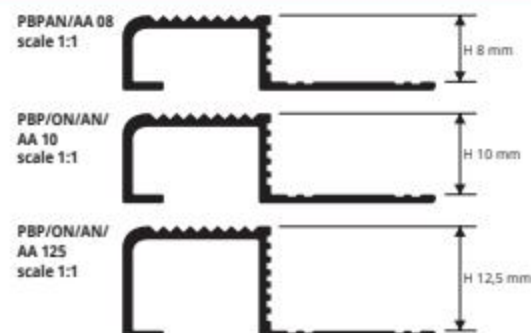

NATURAL BRASS thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PBPON 10	10	27,90	75,33
PBPON 125	12,5	29,52	79,70

NATURAL ALUMINIUM thermo packed 5 Pcs
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PBPAN 08	8	6,63	17,90
PBPAN 10	10	6,98	18,85
PBPAN 125	12,5	7,48	20,20


ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PBPAA 08	8	8,43	22,76
PBPAA 10	10	8,79	23,73
PBPAA 125	12,5	9,26	25,00

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

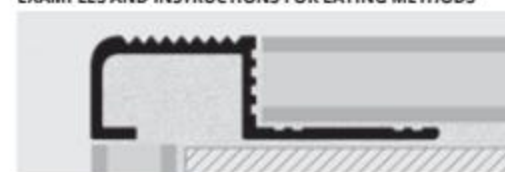

1. Choose the PROBRASTEP in the required width and colour according to the thickness of the tile (stairs). 2. First fix the riser part, placing it at the correct and final height. 3. Fill the empty spaces under the profile with the tile adhesive. 4. Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile. 5. Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive. Oxidation marks in the polished/natural brass range may be easily removed with specific chemical products (Sidel-Smac).

PROSTAIR BOTTON / STRIP are a tactile anti-slip botton/strip made in stainless steel AISI 316/1.4401-V4A. **PROSTAIR BOTTON / STRIP** has the function to realize the signaling lanes to the floor, and warning stairs, able to guide the blind and visually impaired. It is available with a length of 28.5 cm, a width of 3.5 cm and a thickness of 5mm and is provided with 3 stems, 2 cm high, for its fastening.

PROSTAIR BOTTON / STRIP

POLISHED, BRUSHED STAINLESS
STEEL AISI 316/1.4404-V4A



PROSTAIR BOTTON
POLISHED STAINLESS STEEL AISI 316/1.4404-V4A - pack. 20 Pcs

Article	Ø mm	€/pack
PTRB 3520/20	35	133,20

PROSTAIR BOTTON STRIP
BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A - pack. 10 Pcs

Article	L x H mm	€/pack
PTRB 28035/10	280 X 35	389,40


INSTRUCTIONS FOR LAYING METHODS

1. Put PROSTAIR BOTTON TEMPLATE on the desired zone. 2. Score on the support the position of the necessary holes. 3. Remove the template and drill the substrate with a tip 4 mm for a depth of approximately 2.5 cm. 4. Open the holes already made with a 8mm drill bit. 5. Remove dust residues. 6. Fill the hole with PROBAND FIX. 7. Put in the hole PROSTAIR BOTTON.


INSTRUCTIONS FOR LAYING METHODS

1. Put PROSTAIR BOTTON STRIP on the desired zone. 2. Scoring on the support in correspondence of the stems the points at which pierce. 3. Drill the substrate with a tip 4 mm for a depth of approximately 2.5 cm. 4. Open the holes already made with a 8mm drill bit. 5. Remove dust residues. 6. Fill the hole with PROBAND FIX. 7. Put in the hole PROSTAIR BOTTON STRIP.

PTRB 3520



PTRB 28035

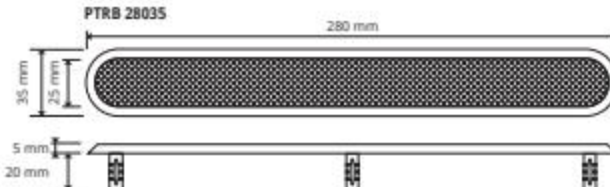

PROSTAIR BOTTON TEMPLATE for PROSTAIR BOTTON


ZINC-PLATED STEEL

PROSTAIR BOTTON TEMPLATE is a mold, made in zinc-plated steel, which allows to score the points where to drilling for the mounting of PROSTAIR BOTTON. **PROSTAIR BOTTON TEMPLATE** has a Size of 30 x 44.5 cm and is Equipped with 48 holes of a diameter 4 mm. Provided with circular joints which can be connected to other molds.

ZINC-PLATED STEEL
pack. 4 Pcs

Article	L x H mm	€/pack
PTRTEM/4	445 x 300	804,40


PTRTEM

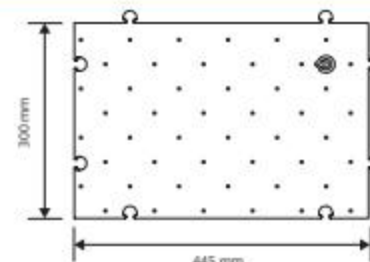

PROTERMSTEP ACC

POLISHED, BRUSHED STAINLESS
STEEL AISI 304/1.4301-V2A

PROTERMSTEP ACC is the new step cover profile made of stainless steel. Designed to protect the edge of the step and to hide the joint between the tread and the step rise. The special notched shape in the upright stem provides it with excellent anchorage between floor/glue/profile. Reversible profile.

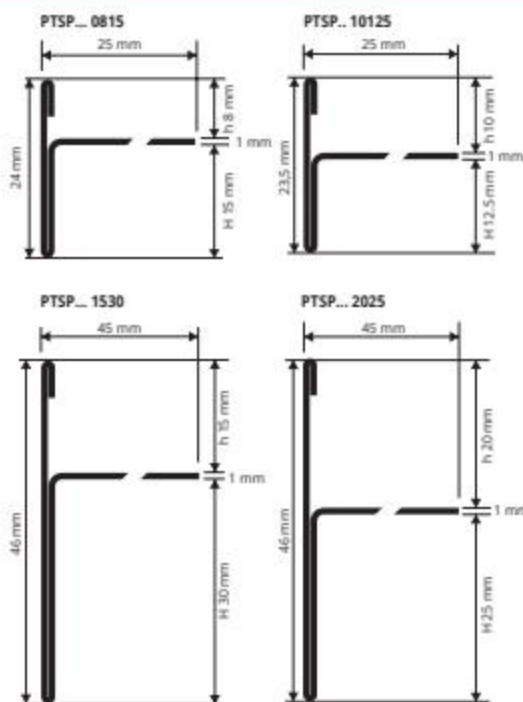

EXAMPLES OF LAYING for instructions see the product below



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	h / H mm	€/lm	€/Pc
PTSPAC 0815	08 / 15	18,42	49,73
PTSPAC 10125	10 / 12,5	18,42	49,73
PTSPAC 1530	15 / 30	35,26	95,20
PTSPAC 2025	20 / 25	35,26	95,20

EXTERNAL CORNERS - pack. 10 Pcs

Article	h / H mm	€/Pc
REPTSAC 0815/1	08 / 15	45,24
REPTSAC 10125/1	10 / 12,5	45,24
REPTSAC 1530/1	15 / 30	45,24
REPTSAC 2025/1	20 / 25	45,24

JUNCTION H 10 - 12,5 - 15 - 20 mm - pack. 10 Pcs

Article	h / H mm	€/Pc
GIPTSAC 0815/1	08 / 15	8,27
GIPTSAC 10125/1	10 / 12,5	8,27
GIPTSAC 1530/1	15 / 30	8,27
GIPTSAC 2025/1	20 / 25	8,27




BRUSHED STAINLESS ST. AISI 304/1.4301-V2A
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	h / H mm	€/lm	€/Pc
PTSPACS 0815	08 / 15	23,95	64,67
PTSPACS 10125	10 / 12,5	23,95	64,67
PTSPACS 1530	15 / 30	45,84	123,77
PTSPACS 2025	20 / 25	45,84	123,77

COLOURS



JOINT
GIPTSAC ..




EXTERNAL CORNER (WELDED)
REPTSAC ..



PROTERMSTEP ALL

NATURAL AND ANODIZED SILVER
ALUMINIUM

PROTERMSTEP ALL is the new step cover profile made of natural and anodized aluminium. Designed to protect the edge of the step and to hide the joint between the tread and the step rise. The special notched shape in the upright stem provides it with excellent anchorage between floor/glue/profile.

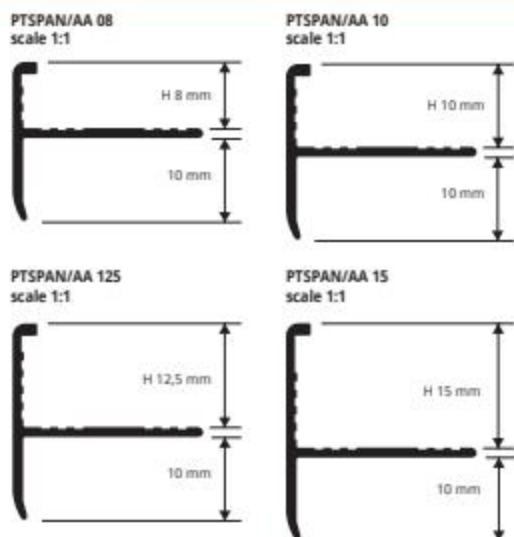


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



NATURAL ALUMINIUM
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PTSPAN 08	8	3,66	9,88
PTSPAN 10	10	3,79	10,23
PTSPAN 125	12,5	4,02	10,85
PTSPAN 15	15	4,36	11,77

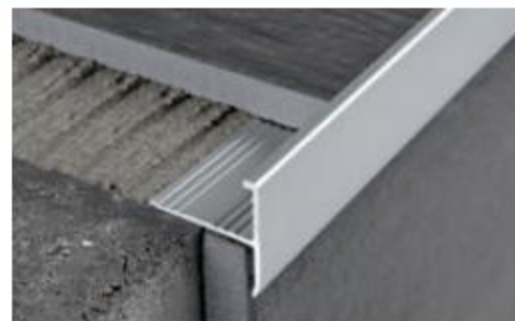

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PTSPAA 08	8	4,82	13,01
PTSPAA 10	10	4,97	13,42
PTSPAA 125	12,5	5,19	14,01
PTSPAA 15	15	5,51	14,88

COLOURS



1. Choose the PROTERMSTEP in the required width and colour according to the thickness of the tile (stairs). 2. First fix the riser part, placing it at the correct and final height. 3. Fill the empty spaces under the profile with the tile adhesive. 4. Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile. 5. Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive.

PROSTYLE KL 10 is a step protecting profile, technical and very elegant, used to keep the step made of thin ceramic tiles and kerlite/laminam non-skid and non-slip. Product in anodized aluminium with the angle portion crimped in order to increase its adhesion. Internal height 4.5 mm. It is compulsory in public buildings to comply with accident-prevention regulations.

PROSTYLE KL 10

ANODIZED SILVER ALUMINIUM



ANODIZED SILVER ALUMINIUM
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PSYKLAA 1045	4,5	9,05	24,44

COLOURS



AA - Anodized silver aluminium


CAPS - pack. 2 Pcs (1 R and 1 L)

Article	H mm	€/Pack.
TPSYKLAA 1045/1	4,5	3,38

Articles not for sale singly

1. Cut "PROSTYLE KL 10" to the desired length. 2. Lay the tiles on the step rise and apply the adhesive on the step tread where the profile will be laid. 3. Lay the profile on the step tread aligning it with the tiles of the step rise. 4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile. 5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PSYKLAA 1045
scale 1:1

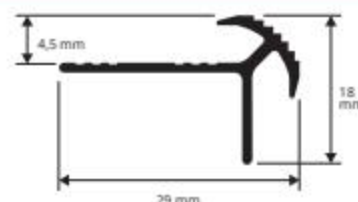

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



PROSTAIR KL 20 is a step protecting profile, technical and very elegant, used to keep the step made of thin ceramic tiles and kerlite/laminam non-skid and non-slip. Product in anodized aluminium with the upper portion crimped in order to increase its adhesion and a lower vertical tab created to cover the riser of the step. It is compulsory in public buildings to comply with accident-prevention regulations. Available height H 4.5 mm.

PROSTAIR KL 20

ANODIZED SILVER ALUMINIUM

ANODIZED SILVER ALUMINIUM
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTRKLAA 2045	4,5	7,54	20,36

COLOURS




AA - Anodized silver aluminium




1. Cut "PROSTAIR KL 20" to the desired length. 2. Lay the tiles on the step rise and apply the adhesive on the step tread where the profile will be laid. 3. Fill the cavities on back of the profile with adhesive and lay it on the step tread aligning it with the tiles of the step rise. 4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile. 5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PTRKLAA 2045
scale 1:1

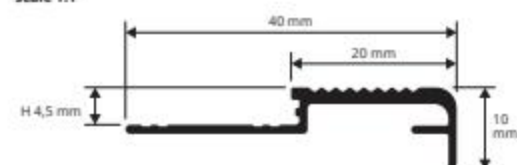

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

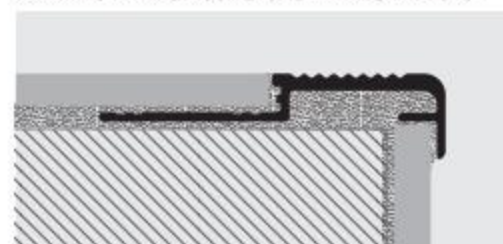


DOUBLE TERMINAL


ANODIZED ALUMINIUM
VARNISHED STONE LINE ALUMINIUM

DOUBLE TERMINAL is an aluminum profile made up of a perforated flange which guarantees perfect grip with the adhesive, and on one side a smooth vertical view. The profile is suitable as a connecting profile between riser and tread in stairs covered in ceramic and natural stones and can also be used upside down, useful for being used for two different thicknesses of tile. Its particular section, availability in different finishes and special pieces such as capsules and joints make **DOUBLE TERMINAL** in anodized or painted aluminum a highly refined profile that allows for perfect installation.

NEWS

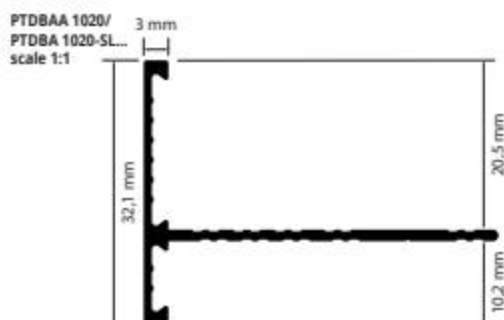

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

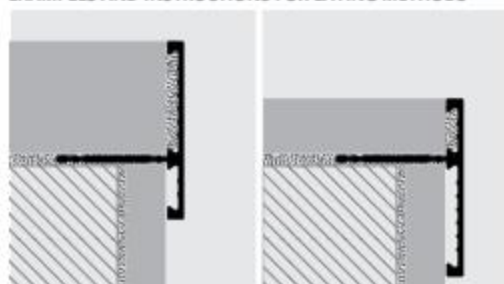


1. Choose the DOUBLE TERMINAL according to the desired finish; 2. Cut DOUBLE TERMINAL to the desired length and apply the adhesive to the support where the profile will be placed; 3. Press the DOUBLE TERMINAL flange into the adhesive; 4. Lay the tiles, taking care to align them with the profile and leave a joint of approximately 2 millimetres. Immediately remove adhesive residue from the profile surface; 5. Carefully grout the joints between the profile and the tile to avoid stagnation of any water. Immediately remove putty residues from the profile surface.



ANODIZED ALUMINIUM SILVER thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	h / H mm	€/lm	€/Pc
PTDBAA 1020	10/20	8,65	23,36

COLOURS



KALEIDOS

STONE LINE		
SL01 - Stone white	SL02 - Stone cream	SL03 - Stone greyvory
SL04 - Stone sand	SL05 - Stone gray	SL13 - Stone oyster grey
SL08 - Stone antradrak	SL18 - Stone white cement	



ALUMINIUM STONE LINE thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	h / H mm	€/lm	€/Pc
PTDBA 1020-SL...	10/20	13,83	37,35

The code of the selected colour must be added to the article code.
E.g.: PTDBA 1020-SL... (chosen colour Stone white) PTDBA 1020-SL01.

ALUMINIUM JOINTS - pack. 1 Pc

Article	h / H mm	€/Pc
GIPTDBAA 1020/1	10/20	8,76
GIPTDBA 1020-SL.../1	10/20	12,75

CAPSULES ALUMINIUM - pack. 1 Pc

Article	h / H mm	€/Pc
CPTDBAA 1020/1	10/20	8,76
CPTDBA 1020-SL.../1	10/20	12,75




NEWS

PROSHADOW STAIR & WALL is an aluminum profile, anodized or painted, consisting of a perforated flange that ensures a perfect grip with the adhesive used and a 37.6 mm vertical visible part. An LED strip can be applied to the 9mm deep cavity, 20mm-high beneath the protruding section. This profile allows for a 20 mm perimeter rabbet for step. **PROSHADOW STAIR & WALL** aluminum is suitable for any type of internal staircase with tiles, terracotta, wood and natural stone cladding.

Available from June 2026

PROSHADOW STAIR & WALL

ANODIZED ALUMINIUM, VARNISHED
STONE LINE ALUMINIUM

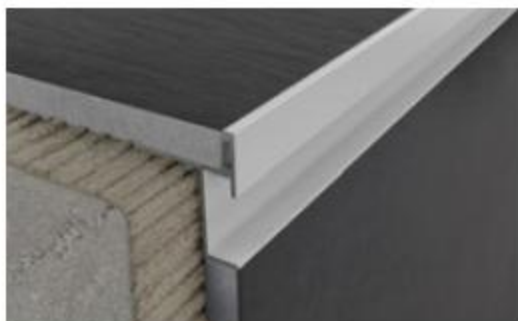


ANODIZED ALUMINIUM SILVER thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	h / H mm	€/lm	€/Pc
PSHDWSTAA 10	10	18,50	49,95

CAPS ANODIZED ALUMINIUM SILVER- pack. 1 Pc (1 R and 1 L)

Article	H mm	€/Pack.
TPSHDWSTAA 10/1	10	17,20

COLOURS



AA - Anodized silver alum.

KALEIDOS

STONE LINE		
SL01 - Stone white	SL05 - Stone gray	SL08 - Stone antiradark
SL12 - Stone black	SL18 - Stone white cement	




ALUMINIUM STONE LINE thermo packed
bar length 2 lm - pack. 20 Pcs - 40 lm


Article	h / H mm	€/lm	€/Pc
PSHDWST 10-SL01	10	29,60	59,20
PSHDWST 10-SL05	10	29,60	59,20
PSHDWST 10-SL08	10	29,60	59,20
PSHDWST 10-SL12	10	29,60	59,20
PSHDWST 10-SL18	10	29,60	59,20

CAPS ALUMINIUM STONE LINE - pack. 1 Pc (1 R and 1 L)

Article	H mm	€/Pack.
TPSHDWST 10-SL01/1	10	27,52
TPSHDWST 10-SL05/1	10	27,52
TPSHDWST 10-SL08/1	10	27,52
TPSHDWST 10-SL12/1	10	27,52
TPSHDWST 10-SL18/1	10	27,52

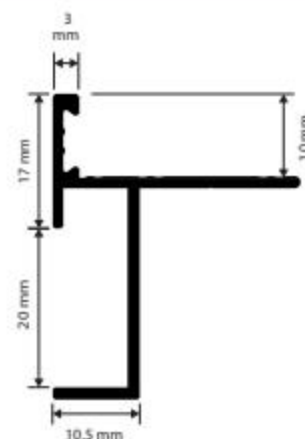

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

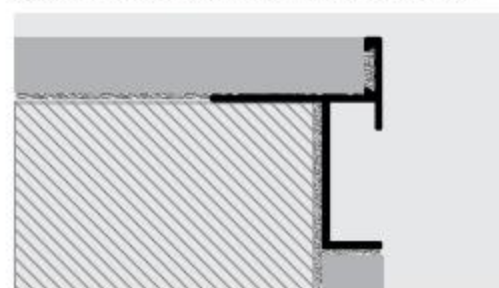

1. Choose PROSHADOW STAIR & WALL depending on the thickness of the flooring and the desired finish. 2. Cut PROSHADOW STAIR & WALL to the desired length. 3. Lay the covering on the riser and apply the glue to the tread where the profile will be laid. 4. Fill the lower cavity of the profile with adhesive and apply it to the tread taking care to align it with the previously applied riser. 5. Apply the adhesive on the tread taking care to cover and lay the covering on the tread taking care to align it with the profile. Remove adhesive residue from the profile surface immediately. 6. Carefully fill the gaps between profile and tile. Remove immediately glue residues from the surface of the profile.



PROSTYLE


ROUNDED STEP NOSING
STAINLESS STEEL AISI 304/1.4301-V2A

PROSTYLE is a technical/decorative profile in stainless steel AISI 304/1.4301-V2A for ceramic tile/wood steps. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. Elegant profile for all public/private environments. In order to perfect placing and to look after details, external angles and closing caps are available.


PSYAC 08
scale 1:1



PSYAC 10
scale 1:1

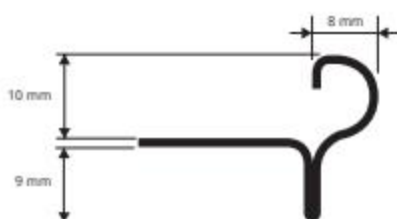

PSYAC 125
scale 1:1

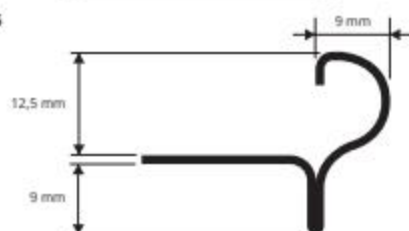

RPSYAC 08/10/125



TPSYAC 08/10/125



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack 20 Pcs - 54 lm - 10/10mm

Article	H mm	€/lm	€/Pc
PSYAC 08	8	16,06	43,36
PSYAC 10	10	16,56	44,71
PSYAC 125	12,5	17,39	46,95

COLOURS



VARNISHED PLASTIC STEEL EFFECT JOINT - pack 1 Pcs

Article	€/Pc
RPSYAC 08/1	8,29
RPSYAC 10/1	8,29
RPSYAC 125/1	8,29



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROSTYLE with suitable height for the thickness of the floor (stairs). 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

STAINLESS ST. END CAPS H 8 - 10 - 12,5 mm - pack 1 Pcs


Article	€/Pc
TPSYAC 08/11	3,82
TPSYAC 10/1	3,82
TPSYAC 125/1	3,82

PROSTYLE


KNURLED, ROUNDED STEP NOSING
NATURAL, POLISHED AND CHROMED BRASS

PROSTYLE is a technical/decorative profile in natural brass, as well as with polished or chromed finish, for ceramic tile/wood steps. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. It is knurled on the top to make the profile non-slip. Elegant profile for all public/private environments. Shrink-wrapped profile with bar code.

PSYON/OL 10
PSYOC 10
scale 1:1

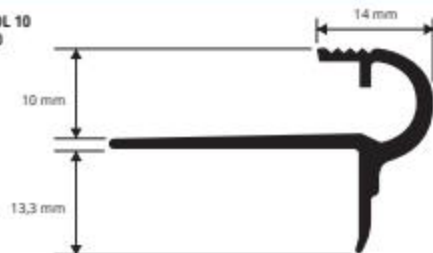

PSYON/OL 125
PSYOC 125
scale 1:1

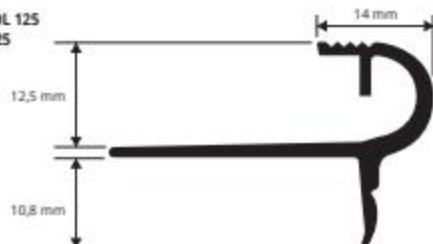

CHROMED BRASS thermo packed
bar length 2,7 lm - pack 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PSYOC 10	10	35,75	96,53
PSYOC 125	12,5	37,35	100,85

VARNISHED PLASTIC JOINT - pack 1 Pc

Article	€/Pack
RPSYOC 10-125/1	8,28
RPSYOL 10-125/1	8,28
RPSYON 10-125/1	8,28



POLISHED BRASS thermo packed
bar length 2,7 lm - pack 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PSYOL 10	10	30,67	82,81
PSYOL 125	12,5	32,28	87,16

COLOURS



PROSTYLE is a technical/decorative profile for ceramic tile/wood steps made in gold-silver anodized aluminium. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. It is knurled on the top to make the profile non-slip. Elegant profile for all public/private environments. Shrink-wrapped profile with bar code.

PROSTYLE

KNURLED, ROUNDED STEP NOSING
GOLD AND SILVER ANODIZED ALUMINIUM

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROSTYLE in the required width and colour according to the thickness of the tile. 2. First fix the riser part, placing it at the correct and final height. 3. Fill the empty spaces under the profile with the tile adhesive. 4. Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its vertical part covers the edge of the riser tile. 5. Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive. Oxidation marks in the polished/natural brass range may be easily removed with specific chemical products (Sidel-Smac).



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PSYAA 08	8	9,59	25,89
PSYAA 10	10	10,09	27,24
PSYAA 125	12,5	10,77	29,08

ANODIZED GOLD ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PSYAO 08	8	9,59	25,89
PSYAO 10	10	10,09	27,24
PSYAO 125	12,5	10,77	29,08

ALUMINIUM CAPS H 8 - 10 - 12,5 mm - pack. 1 Pcs

Article	€/Pack
TPSYAO 08/1	4,01
TPSY... 08/1	4,01
TPSY... 10/1	4,01
TPSY... 125/1	4,01

Available: AA - AO.
The code of the selected colour must be added to the article code.
E.g.: TPSY... 08 (chosen colour polished brass) TPSYOL 08/1.

COLOURS





VARNISHED PLASTIC JOINT - pack. 1 Pcs

Article	€/Pack
RPSY... 08-10-125/1	8,28

Universal, suitable for three profile heights
Available: AA - AO.
The code of the selected colour must be added to the article code.
E.g.: RPSY... 08 (chosen colour polished brass) RPSYOL 08/1

**AO - ITEM AVAILABLE
WHILE STOCKS LAST.**

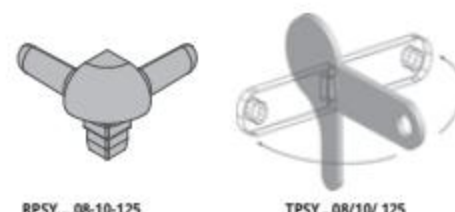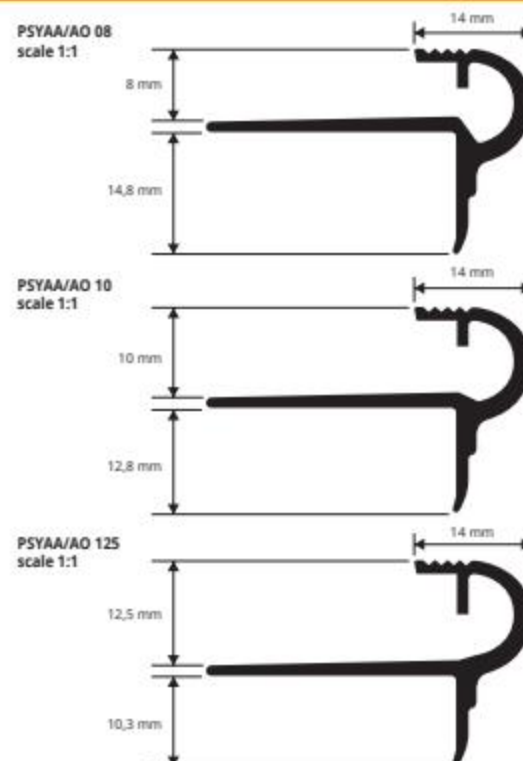

RPSY... 08-10-125

TPSY...08/10/ 125

STEPS

PROSTEP INS is a non-slip profile in aluminium that allows to connect the rise and the tread in case of stairs covered with wooden or laminate flooring. The profile has to be laid together with rise and tread. It is equipped with a punched flange that guarantees its fixing. **PROSTEP INS** in anodized aluminium is suitable for any stair covered with wooden flooring.

PROSTEP INS


ANODIZED SILVER ALUMINIUM



ANODIZED SILVER ALUMINIUM
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTSAA 105	10,5	7,06	19,06
PTSAA 16	16	7,59	20,49


COLOURS

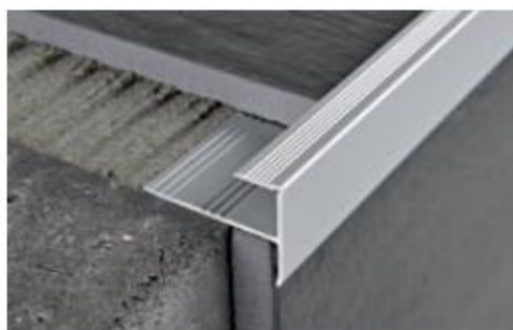

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROSTEP INS" according to the thickness of the tile. 2. Cut "PROSTEP INS" to the desired length. 3. Lay the wood or laminate on the step rise and apply adhesive on the area of the step tread, where the profile will be laid. 4. Lay the profile on the step tread, aligning it with the edge of the rise covering. 5. Lay the wood or laminate on the tread of the step taking care to insert it into the cavity.

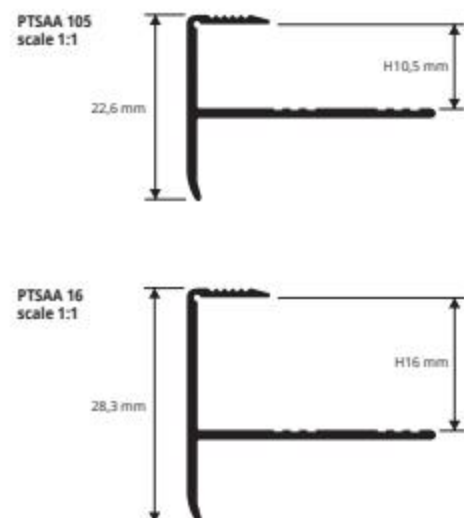


stair nosing profiles



TUBE and ACCESSORIES for runners and stair-carpet guides, available in the finishes in polished painted brass, polished gold aluminium and polished chrome aluminium.

TUBES and ACCESSORIES

GOLD AND CHROME POLISHED ALUMINIUM
POLISHED VARNISHED BRASS

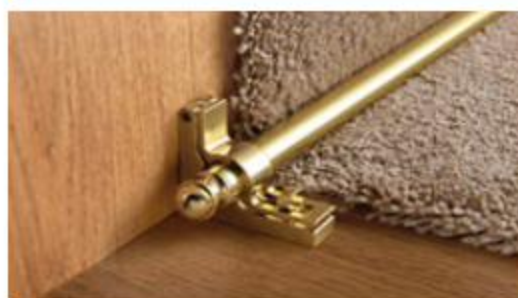

BLISTER KIT - 2 TUBES AND 4 TUBE PLUGS - POLISHED BRASS COATED
length tube 0,8 lm - pack. 60 Pcs

Article	Ø mm	€/Pc
TCTOL 118S	11	24,13

BLISTER KIT - 2 TUBES AND 4 TUBE PLUGS - POLISHED BRASS COATED
length tube 0,9 lm - pack. 60 Pcs

Article	Ø mm	€/Pc
TCTOL 119S	11	26,39



BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED ALUM.
length tube 0,8 lm - pack. 60 Pcs

Article	Ø mm	€/Pc
TCTBO 128S	12	16,80


BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED ALUM.
length tube 0,9 lm - pack. 60 Pcs

Article	Ø mm	€/Pc
TCTBO 129S	12	18,30

TCTOL 11/13S

TCTBO 12S

TCTBC 12S

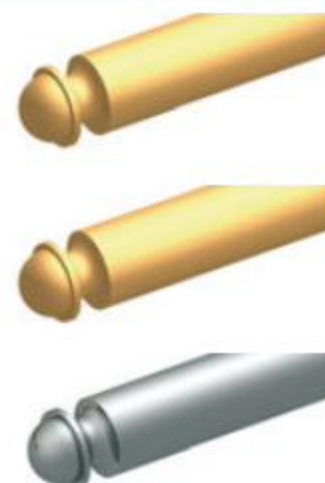

tube and accessories for stairs

Varnished polished brass is not suitable for places subject to heavy foot-traffic and / or abrasion.

COLOURS



TUBE for runners and stair-carpet guides

GOLD AND CHROME POLISHED ALUMINIUM, POLISHED VARNISHED BRASS

POLISHED BRASS COATED
bar length 2 lm - pack. 40 Pcs - 80 lm

Article	Ø mm	€/ml	€/Pc
TGSOL 112	11	19,04	38,08
TGSOL 132	13	22,31	44,62

For different size bars, contact the sales office.

POLISHED ALUMINIUM
bar length 2 lm - pack. 40 Pcs - 80 lm

Article	Ø mm	€/ml	€/Pc
TGSBO 122	12	7,12	14,24
TGSBC 122	12	7,12	14,24

TGSOL 11/13

TGSBO 12

TGSBC 12



TUBE PLUGS/END CAPS for tube

POLISHED BRASS AND CHROMED BRASS

POLISHED BRASS AND CHROMED BRASS - pack. 60 Pcs

Article	Ø mm	€/Pack.
TETOL 11	11	45,60
TETOC 12	12	120,00
TETOL 12	12	54,60
TETOL 13	13	62,40

TETOL 11
TETOL 12
TETOL 13

TETOC 12



SUPPORT / EYELET for tube with screw

POLISHED BRASS AND CHROMED BRASS

POLISHED BRASS AND CHROMED BRASS - pack. 20 Pcs

Article	Ø mm	€/Pack.
SOOL 12	12	50,60
SOOC 12	12	85,20
SOOL 14	14	53,60

SOOL 12
SOOL 14

SOOC 12



HINGE SUPPORT for tube

POLISHED BRASS

POLISHED BRASS - pack. 20 Pcs

Article	Ø mm	€/Pack.
SCOL 11	11	168,00
SCOL 13	13	178,20

Articles without bar code.
For bar code add the letter "C" after the article code. E.g.: SCOL 11C and add € 0,40 x Pc (+ 0,20 x lm) to the gross price.
For cutting to required length 1 lm + 5 % x lm.

SCOL 11
SCOL 13




PROWALK ACC

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
PUNCHED OR SELF ADHESIVE

PROWALK ACC is steps protecting steel profile for existing scales. Its superior side level is crimped in order to increase its adhesion. Available in version or with holes either with adhesive. Available sizes: 30 x 10, 30 x 20, and 30 x 30 mm. All profiles are protected with protective film. It's ideal for the edges protection and screening as well as of the corner between the rising and the tread which is the point of the greatest strain.

stair nosing for existing steps

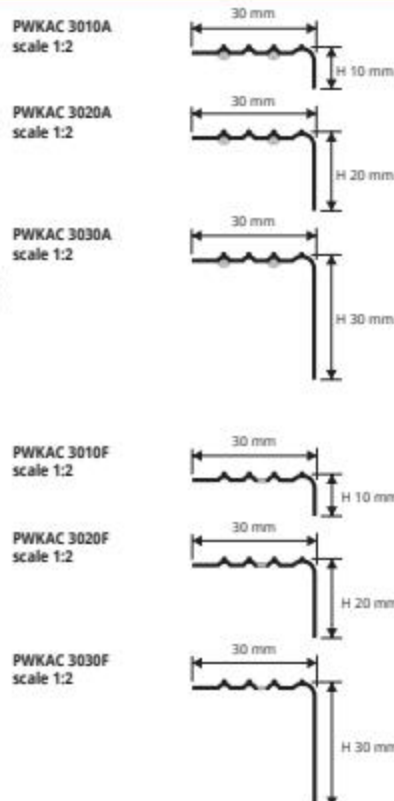

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with adhesive
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10mm

Article	L x H mm	€/lm	€/Pc
PWKAC 3010A	30 X 10	19,01	51,33
PWKAC 3020A	30 X 20	21,58	58,27
PWKAC 3030A	30 X 30	24,22	65,39

INSTRUCTIONS FOR LAYING METHODS

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A punched - with protective film - bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10mm

Article	L x H mm	€/lm	€/Pc
PWKAC 3010F	30 X 10	17,04	46,01
PWKAC 3020F	30 X 20	19,60	52,92
PWKAC 3030F	30 X 30	22,24	60,05

COLOURS



AC - Polished stainless st.
AISI 304/1.4301-V2A


PROEND

GOLD, SILVER AND BRONZE ANOD. ALUMINIUM
WITH/ WITHOUT ADHESIVE AND PUNCHED


PROEND is a step nosing profile in anodized aluminium with silver-gold-bronze finish, available with self-adhesive backing or punched. Ideal for protecting existing steps and with knurled flat surface, it guarantees excellent safety features to prevent accidents in public and private environments.

PROEND ensures a perfect finish, covering laying defects and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the step or using screws and screw anchors in the punched version.

stair nosing for existing steps

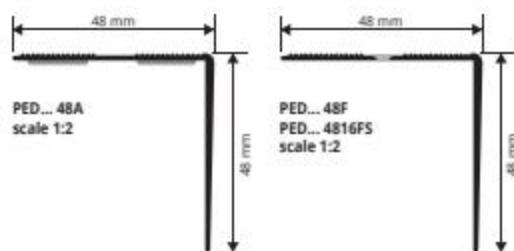

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

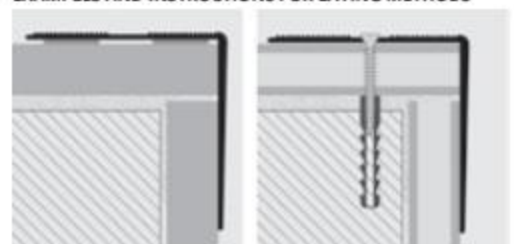

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.



ANOD. ALUMINIUM with and without adhesive thermo packed
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H x L mm	€/lm	€/Pc
PED... 48A	48 X 48	11,27	30,43
PED... 48	48 X 48	9,68	26,14

A at the end of the product code = item with adhesive

COLOURS



AA - Anodized silver alum. AO - Anodized gold alum. AB - Anodized bronze alum.



ANODIZED ALUMINIUM punched thermo packed
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H x L mm	€/lm	€/Pc
PED... 48F	48 X 48	9,68	26,14

ANOD. ALU. punched with screws and screw anchors
thermo packed - bar length 1,65 lm - pack. 20 Pcs

Article	H x L mm	€/lm	€/Pc
PED... 4816FS	48 X 48		19,75

Available in the colours: AA - AO - AB. The code of the selected colour must be added to the article code.
E.g.: PED... 48A (chosen colour anodized gold) PEDAO 48A.

PROWALK is a step nosing profile in polished brass and anodized aluminium for existing steps. The upper part is knurled to increase slip and slide resistance and is applied after laying. Available with holes or without holes. Available in the widths 22 x 22 and 30 x 30 mm. All the profiles are shrink-wrapped. Ideal for protecting and shielding the edges and corner between riser and tread, which are the areas subjected to most stress.

PROWALK

POLISHED BRASS and ANODIZED ALUMINIUM
ADHESIVE and PUNCHED



KNURLED POLISHED BRASS with adhesive thermo packed
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	H x L mm	€/lm	€/Pc
PWKOL 22A	22 X 22	26,19	70,71
PWKOL 30A	30 X 30	33,73	91,07



KNURLED POLISHED BRASS punched thermo packed
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	H x L mm	€/lm	€/Pc
PWKOL 22F	22 X 22	23,30	62,91
PWKOL 30F	30 X 30	30,84	83,27

KNURLED POLISHED BRASS without holes thermo packed
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	H x L mm	€/lm	€/Pc
PWKOL 22	22 X 22	23,01	62,13
PWKOL 30	30 X 30	30,23	81,62

COLOURS



OL - Polished brass



KNURLED ANODIZED ALUMINIUM with adhesive thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PWK... 22A	22 X 22	8,62	23,27
PWK... 30A	30 X 30	12,48	33,70



KNURLED ANODIZED ALUMINIUM punched thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PWK... 22F	22 X 22	6,50	17,55
PWK... 30F	30 X 30	9,45	25,52

KNURLED ANODIZED ALUM. WITHOUT HOLES thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PWK... 22	22 X 22	6,28	16,96
PWK... 30	30 X 30	9,12	24,62


Available in the colours: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code. E.g.: PWK... 22A (chosen colour anodized gold) PWKAO 22A.

COLOURS




AO - Anodized gold alum. AA - Anodized silver alum. AB - Anodized bronze alum.


PWK... 22A
PWK... 229AS
scale 1:1




PWK... 30A
PWK... 309AS
scale 1:1



PWK... 22F
PWK... 229FS
scale 1:1




PWK... 30F
PWK... 309FS
scale 1:1



stair nosing for existing steps

STEPS

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

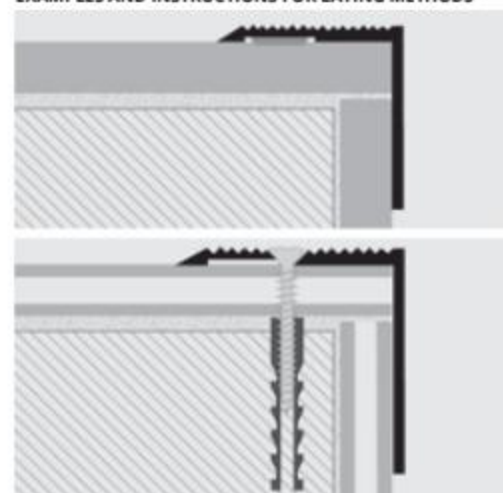

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.


PROWALK 2510 PROWALK 2520

ALUMINIUM 30 WOOD FINISHES AND 6
ANODIZED FINISHES PUNCHED OR SELF ADHESIVE


PROWALK 2510 e 2520 are new stair-nosing profiles for existing stairways. Designed to protect and restore stair steps made of wood, laminate, ceramic, etc. Made with anodized aluminium with silver, gold and bronze finish and available in self-adhesive or perforated versions. Sizes available: 2.7 m lengths and 0.9 m & 1.35 m Self-Pack.

STEPS

stair nosing for existing steps

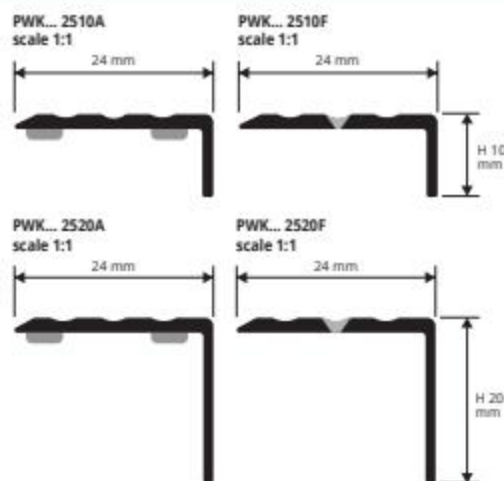

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

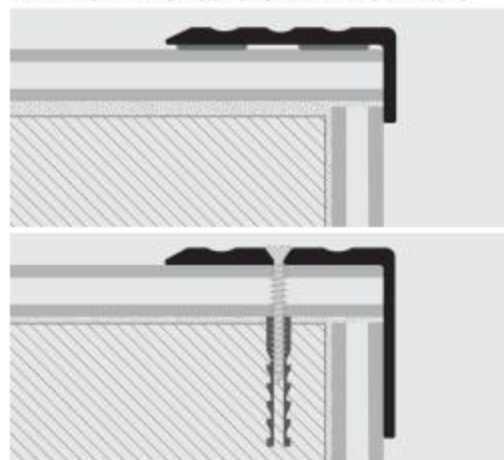

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.



ANODIZED ALUMINIUM with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PWK... 2510A	24 X 10	6,43	17,36
PWK... 2520A	24 X 20	7,06	19,06

ANODIZED ALUMINIUM with adhesive
thermo packed - bar length 0,90 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PWK... 25109AS	24 X 10		6,91
PWK... 25209AS	24 X 20		7,96



SELF
PACK



ANODIZED ALUMINIUM punched thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PWK... 2510F	24 X 10	4,82	13,01
PWK... 2520F	24 X 20	5,54	14,96

ANODIZED ALUM. punched, screws and screw anchors
thermo packed - bar length 0,90 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PWK... 25109FS	24 X 10		5,81
PWK... 25209FS	24 X 20		6,68



SELF
PACK

ANODIZED ALUM. punched, screws and screw anchors
thermo packed - bar length 1,35 lm - pack. 20 Pcs

Article	L x H mm	€/lm	€/Pc
PWK... 251013FS	24 X 10		8,43



SELF
PACK

Available in the finishes: AO - AA - AB.

The code of the selected finish must be added to the article code. E.g.: PWK... 2510A (chosen finish anodized silver) PWKAA 2510A.

COLOURS

ANODIZED		
AO - Anodized gold alum.	AA - Anodized silver alum.	AB - Anodized bronze alum.


© 2020 All rights reserved by Progress Profiles. Printed in Italy

PROEND INS 75 is a step nosing profile in anodized aluminium with interchangeable rubber insert: the upper part is knurled to increase slip and slide resistance and is applied after laying. Available anodized with gold, bronze or silver finish and with adhesive or punched.

PROEND INS 75 ensures a perfect finish, covering laying defects and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the step or with screws and screw anchors in the punched version.

PROEND INS 75

SILVER ANOD. ALUMINIUM
ADHESIVE AND PUNCHED

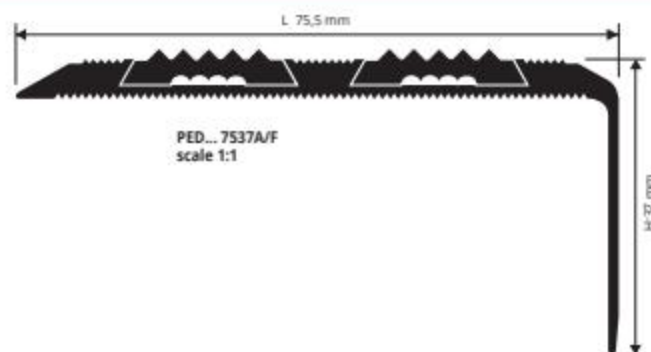

stair nosing for existing steps

STEPS

ANODIZED ALUMINIUM with DOUBLE INSERT
thermo packed - with adhesive

bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H x L mm	€/lm	€/Pc
PEDAA 7537A	37 X 75,5	27,79	75,03

ANODIZED ALUMINIUM with DOUBLE INSERT
thermo packed - punched

bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H x L mm	€/lm	€/Pc
PEDAA 7537F	37 X 75,5	23,77	64,18

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS


Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.


Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

COLOURS



AA - Anodized silver alum.

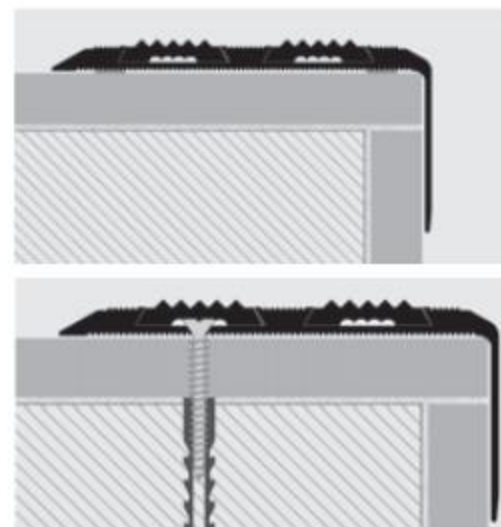


PROEND INS is a step nosing profile in anodized aluminium with interchangeable rubber insert: the upper part is knurled to increase slip and slide resistance and is applied after laying. Available anodized with gold, bronze or silver finish and with adhesive or punched.

PROEND INS ensures a perfect finish, covering laying defects and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the step or with screws and screw anchors in the punched version.

PROEND INS

GOLD, SILVER AND BRONZE ANOD. ALUMINIUM
ADHESIVE AND PUNCHED

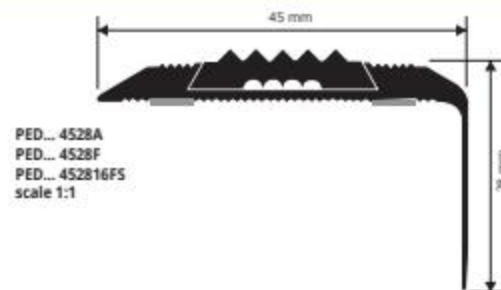

ANODIZED ALUM. with adhesive WITH INSERT thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PED... 4528A	28 X 45	17,61	47,55

AN. ALUM. punched WITH INSERT, screws and screw anchors
thermo packed - bar length 1,65 lm - pack. 20 Pcs



Article	H x L mm	€/lm	€/Pc
PED... 452816FS	28 X 45		31,99

ANODIZED ALUM. punched WITH INSERT thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H x L mm	€/lm	€/Pc
PED... 4528F	28 X 45	12,71	34,32

COLOURS



AA - Anodized silver alum. AO - Anodized gold alum. AB - Anodized bronze alum.

EXAMPLES OF LAYING

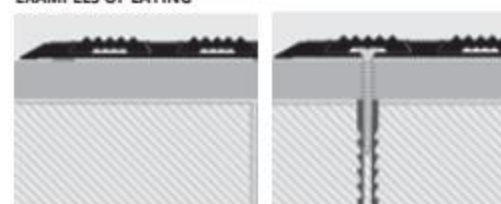

For instructions see the product above


BLACK INTERCHANGEABLE INSERT

VINYL RESIN / RUBBER

VINYL RESIN / RUBBER

bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	€/lm	€/Pc
IIN 12	2,28	6,16



PROEND GRIP 70

SILVER ANOD. ALUMINIUM
+ NON-SLIP INSERT ADHESIVE AND PUNCHED

PROEND GRIP 70 is a non-slip step nosing profile in anodized aluminium with adhesive non-slip 50mm thick insert in black carborundum to be fitted in the relative groove in the top of the profile upon completion of laying. The profile may be laid with fixing screws hidden afterwards by the adhesive carborundum, or with silicone and/or adhesive to be applied on the bottom of the profile, which is designed to ensure an excellent grip. It is made in anodized aluminium with silver, gold or bronze finish with anodizing coat of approx. 15/20 micron.

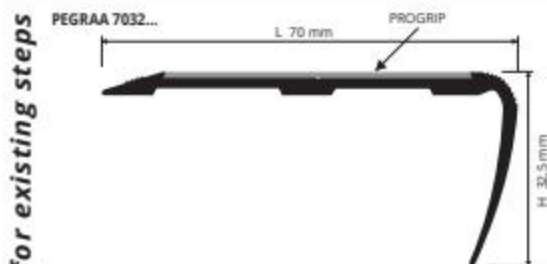

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.



SILVER, GOLD AND BRONZE ANODIZED ALUM. with adhesive
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PEGRAA 7032A	32,5 X 70	19,78	53,41

SILVER, GOLD AND BRONZE ANODIZED ALUM. punched
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PEGRAA 7032F	32,5 X 70	16,19	43,71



COLOURS




The adhesive carborundum strip (PROGRIP) is not included with the profile.
For PEGRAA 7032... order PGR... 50 (Specify the chosen colour).

PROEND 5050


ANODIZED SILVER ALUMINIUM
+ NON-SLIP INSERT ADHESIVE AND PUNCHED

PROEND 5050 is a non-slip profile for stairs in anodized silver aluminium, with a visible surface of 50x50 mm. The profile, available in the adhesive or punched version, is characterized of a horizontal surface partially milled, equipped with a specific groove where the non-slip adhesive Progrid in carborundum could be applied. The profile has also a vertical inclined of 83-degrees surface completely smooth. The ease of application and the availability of the carborundum in different colours, make it a much-sought profile.

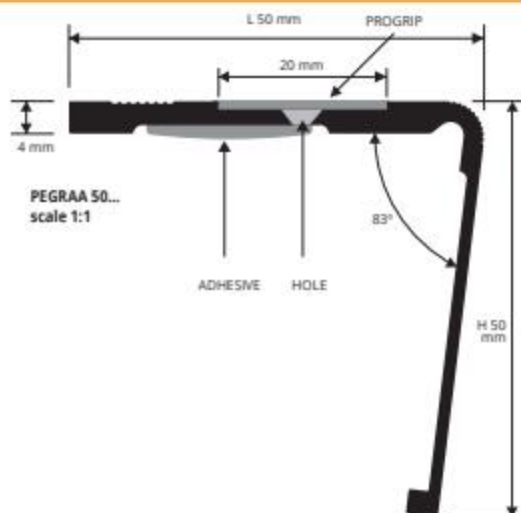

ANODIZED SILVER ALUMINIUM punched / with adhesive
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	HxL mm	€/lm	€/Pc
PEGRAA 50F	50 X 50	13,85	37,40
PEGRAA 50A	50 X 50	16,55	44,69

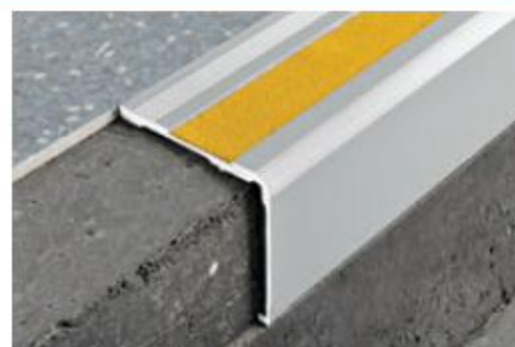

COLOURS



The adhesive carborundum strip (PROGRIP) is not included with the profile.
For PEGRAA 50... order PGR... 20 (Specify the chosen colour).

INSTRUCTIONS FOR LAYING METHODS


Adhesive version

1. Cut PROEND 5050 to the desired length; 2. Remove all the remains of oil, grease and dirt from the surface where the profile will be laid; 3. When the surface is perfectly dry, remove the protective film and press the profile exerting the appropriate pressure; 4. Apply the non-slip strip in carborundum in the desired colour.

Punched version

1. Cut PROEND 5050 to the correct size; 2. Mark on the support the position of the holes present on the profile; 3. Drill holes in the bracket with a 5 mm diameter bit and insert the 5 x 25 mm rawplugs; 4. Align the profiles over the holes and screw it to support; 5. Apply the non-slip carborundum adhesive insert in the desired color.

EXAMPLES OF LAYING

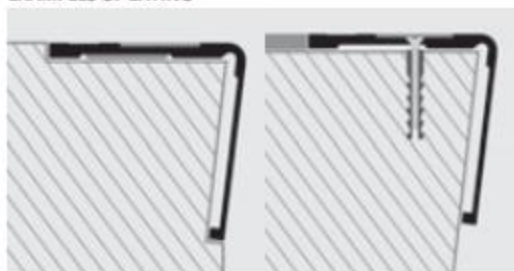

ITEM AVAILABLE WHILE STOCKS LAST.

PROEND GRIP is a non-slip step nosing profile in anodized aluminium with adhesive non-slip 20mm thick insert in black carborundum to be fitted in the relative groove in the top of the profile upon completion of laying. The profile may be laid with fixing screws hidden afterwards by the adhesive carborundum, or with silicone and/or adhesive to be applied on the bottom of the profile, which is designed to ensure an excellent grip. It is made in anodized aluminium with silver, gold or bronze finish with anodizing coat of approx. 15/20 micron.

PROEND GRIP

SILVER, GOLD AND BRONZE ANOD. ALUMINIUM
+ NON-SLIP INSERT ADHESIVE AND PUNCHED



ANODIZED SILVER, GOLD AND BRONZE ALUM. with adhesive thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm	€/lm	€/Pc
PEGR... 5230A	30 X 52	16,70	45,09



ANODIZED SILVER, GOLD AND BRONZE ALUM. punched thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H x L mm	€/lm	€/Pc
PEGR... 5230F	30 X 52	14,02	37,85

Available in the finishes: AA - AO - AB


The code of the selected finish must be added to the article code. E.g.: PEGR... 523016AS (chosen finish anodized silver) PEGRAA 523016AS.

The adhesive carborundum strip (PROGRIP) is not included with the profile.
For PEGR... 5230... order PGR... 20 (Specify the chosen colour).

COLOURS

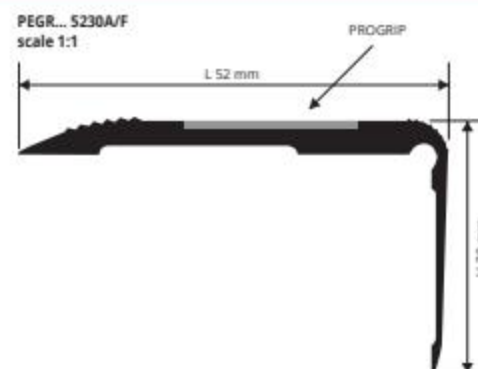

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

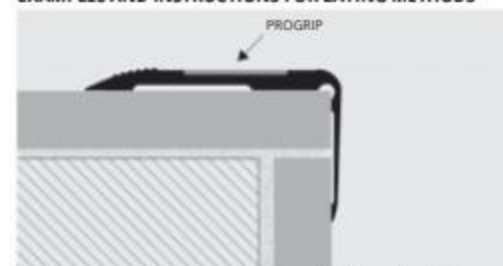

1. Choose the suitable profile for covering the edge of the step.
 2. Clean the surface on which the profile is to be laid, ensuring that it is grease-free and dry. Do not apply the strips at temperatures below 15°.
 3. Remove the protective paper from the adhesive and lay correctly by applying pressure evenly over the whole profile without using a hammer.
- If the punched PROEND GRIP has been chosen, screw the profile to the step and apply the adhesive carborundum to hide the screws.

STEPS

PROGRIP is a self-adhesive product in carborundum consisting of a plastic film plus abrasive granules with high resistance to wear. It is normally used to guarantee safety on steps in public and private environments, as required by accident-prevention laws. Available in various colours and widths to meet all technical and aesthetic requirements. It is advisable to apply 2 strips on each step, rounding off the ends.

PROGRIP

ADHESIVE CARBORUNDUM - 6 COLOURS

COLOURS



ADHESIVE CARBORUNDUM NON-SLIP STRIP for STEPS

rolls length 18,2 lm

Article	Width mm	€/lm	€/Roll
PGRN 20	20	2,08	37,86
PGRG 20	20	4,12	74,98
PGRY 20	20	4,12	74,98
PGRN 25	25	2,76	50,23
PGRG 25	25	4,70	85,54
PGRY 25	25	4,55	82,81
PGRN 50	50	5,67	103,19
PGRG 50	50	9,32	169,62
PGRY 50	50	9,26	168,53



LAYING INSTRUCTIONS

1. Thoroughly clean and degrease the surface of application.
2. Round the ends of the strips.
3. Remove the protective paper from the adhesive and lay the PROGRIP using a roller.
4. Do not apply the strips at temperatures below 15°, otherwise heat the strips and the step.
5. When necessary clean away impurities with a brush and preserve the PROGRIP.
6. When laying on tiles, cut and round the corners of the strips on the inner part of the tile.
7. Carefully seal the outer edges of the strips to prevent water infiltration.