

An interpretation of:
**Grande Arche De la Défense, J. Otto von Spreckelsen,
PARIS (France), 1989**

SKIRTING BOARDS



PROSKIRTING FLAT is the new innovative skirting designed with an integrated system for plasterboard walls, and devised to create a skirting flush to the wall for a modern and contemporary touch.

PROSKIRTING FLAT

ANODIZED,
VARNISHED ALUMINIUM



ORDER THE SUPPORT AND THE TOP YOU WISH



ORDER THE SUPPORT AND THE TOP YOU WISH

VISIBLE TOP
ANODIZED ALUMINIUM thermo packed
bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm	€/lm	€/Pc
PKFLAA 60	60	11,09	22,18

VISIBLE TOP
ALUMINIUM STONE LINE thermo packed
bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm	€/lm	€/Pc
PKFLA 60-SL05	60	17,74	35,48
PKFLA 60-SL18	60	17,74	35,48

VISIBLE TOP
ALUMINIUM EASY LINE thermo packed
bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm	€/lm	€/Pc
PKFLA 60-EYP01	60	13,12	26,24
PKFLA 60-EYP11	60	13,12	26,24

SUPPORT/ PERFORATED BASE
ANODIZED ALUMINIUM thermo packed
bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm	€/lm	€/Pc
PKGCFAA 75	75	11,43	22,86

COLOURS




KALEIDOS

STONE LINE


SL05 - Stone gray	SL18 - Stone white cement
-------------------	---------------------------

EASY LINE

EYP01 - MATT white varnished (RAL 9016)	EYP11 - MATT black varnished
---	------------------------------

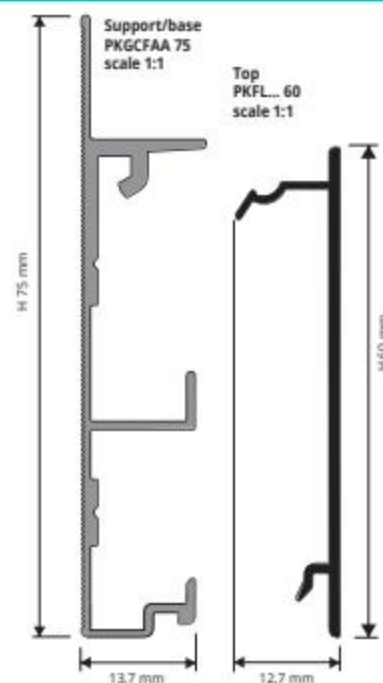

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

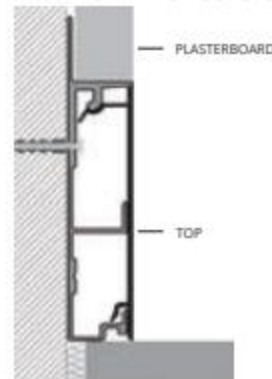

1. Fix the substrate/perforated base to the wall before laying the plasterboard, calculating all the heights and distances. 2. Lay the plasterboard aligning the lower part flush to the PROSKIRTING FLAT. 3. Plaster and carry out the surface finishing on the plasterboard. 4. Choose the required Top finish, cut and lay the profile fitting the lower part and then the upper part by pressing gently. **IMPORTANT:** Pay attention to the external edges of the aluminium Proskirting. They must be protected against agents such as adhesives and sealants and against grinding or scraping actions.

INTERNAL and EXTERNAL CORNERS, END CAPS

ANODISED SILVER AND VARNISHED ALUMINIUM

EXTERNAL / INTERNAL CORNER
ANODIZED ALUMINIUM - pack. 1 Pc

Article	H mm	€/Pack
REPFLAA 60/1	60	10,97

EXTERNAL / INTERNAL CORNER
ALUMINIUM STONE LINE - pack. 1 Pc

Article	H mm	€/Pack
REPFLA 60-SL05/1	60	17,55
REPFLA 60-SL18/1	60	17,55

EXTERNAL / INTERNAL CORNER
ALUMINIUM EASY LINE - pack. 1 Pc

Article	H mm	€/Pack
REPFLA 60-EYP01/1	60	12,86
REPFLA 60-EYP11/1	60	12,86

END CAPS
ANODIZED ALUMINIUM - pack. 1 Pc

Article	H mm	€/Pack
TPKCHAA 55/1	60	9,08

END CAPS
ALUMINIUM STONE LINE - pack. 1 Pc

Article	H mm	€/Pack
TPKCHA 55-SL05/1	60	14,56
TPKCHA 55-SL18/1	60	14,56

END CAPS
ALUMINIUM EASY LINE - pack. 1 Pc

Article	H mm	€/Pack
TPKCHA 55-EYP01/1	60	10,92
TPKCHA 55-EYP11/1	60	10,92

REPFLA.../1



TPKCHA.../1




PROSKIRTING INS

ANODISED SILVER AND VARNISHED ALUMINIUM


PROSKIRTING INS is the new innovative skirting designed with an integrated system for plasterboard walls, and devised to create a recessed skirting for a modern and minimalist design in line with the latest trends.

NEWS
KALEIDOS

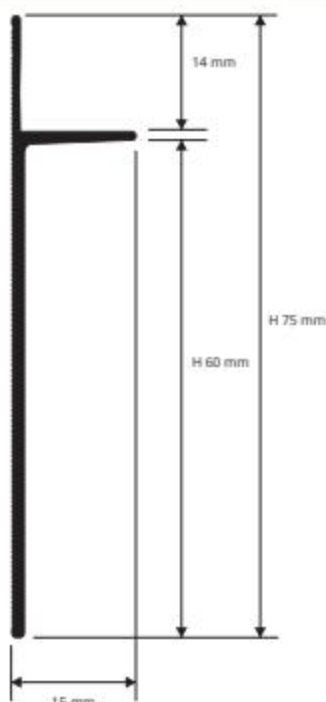

PKINSA... 60
scale 1:1

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

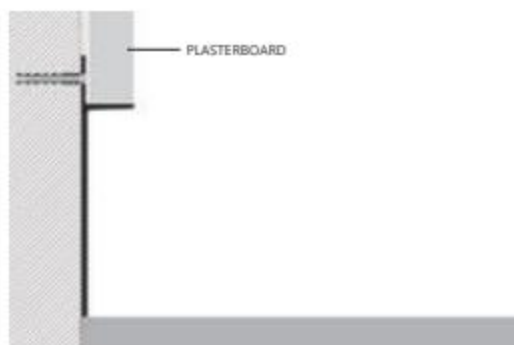

1. Fix "PROSKIRTING INS" using screws (concealed part) and glue/silicone (exposed side), before laying the plasterboard, calculating all the heights and distance. 2. Lay the plasterboard aligning the lower part flush to the "PROSKIRTING INS". 3. Plaster and carry out the surface finishing on the plasterboard.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



ANODIZED ALUMINIUM thermo packed
bar length 2 lm - pack. 30 Pcs - 60 lm

Article	H x L mm	€/lm	€/Pc
PKINSA 60	60 X 15	12,25	24,50

ANODIZED STONE LINE thermo packed
bar length 2 lm - pack. 30 Pcs - 60 lm

Article	H x L mm	€/lm	€/Pc
PKINSA 60-SL05	60 X 15	19,60	39,20
PKINSA 60-SL18	60 X 15	19,60	39,20

ANODIZED EASY LINE thermo packed
bar length 2 lm - pack. 30 Pcs - 60 lm

Article	H x L mm	€/lm	€/Pc
PKINSA 60-EYP01	60 X 15	14,70	29,40
PKINSA 60-EYP11	60 X 15	14,70	29,40

COLOURS



AA - Anod. silver aluminium

KALEIDOS

STONE LINE



SL05 - Stone gray



SL18 - Stone white cement

EASY LINE



EYP01 - MATT white varnished (RAL 9016)




EYP11 - MATT black varnished

PROSKIRTING LINE

ANODISED SILVER AND VARNISHED ALUMINIUM

PROSKIRTING LINE is a skirting board made of silver anodized aluminum, or varnished aluminium consisting of a vertical part with rear grooves that improve adhesion and a horizontal part positioned at the top of the profile. The profile is fixed to the support using PROBAND FIX. Once installed, the upper part of the profile is flush with the wall. PROSKIRTING LINE in aluminum is suitable as a skirting board for any interior environment.

NEWS
KALEIDOS

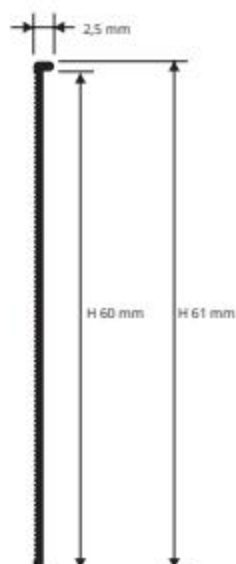

PKLIA... 60
scale 1:1



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H x L mm	€/lm	€/Pc
PKLIAA 60	61 x 2,5	10,63	21,26




ALUMINIUM EASY LINE thermo packed
bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H x L mm	€/lm	€/Pc
PKLIA 60-EYP01	61 x 2,5	12,76	25,52
PKLIA 60-EYP11	61 x 2,5	12,76	25,52

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Fix the "PROSKIRTING LINE" using glue/silicone (exposed side), before making the required coat, calculating all the heights and distances. 2. Carry out the surface finishing aligning the lower part flush to the "PROSKIRTING LINE".

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



COLOURS



AA - Anod. silver aluminium

KALEIDOS

EASY LINE



EYP01 - MATT white varnished (RAL 9016)



EYP11 - MATT black varnished

NEWS
KALEICOS

PROSKIRTING INS 202060 is an anodized or painted aluminium skirting board, composed of a 60 mm vertical part, equipped with horizontal stripes to facilitate bonding and a horizontal protruding 20 mm part on which to lay the plasterboard. The cavity that is created can also be used for laying any skirting flush with the wall or left exposed. PROSKIRTING INS 202060 aluminum is suitable as baseboards in any interior environment.

PROSKIRTING INS 202060

ANODIZED SILVER, VARNISHED ALUMINIUM



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm	H1 mm	H2 mm	€/ml	€/Pc
PKINSAA 202060	60	20	39	10,25	27,68



ALUMINIUM EASY LINE EASY LINE thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	H1 mm	H2 mm	€/ml	€/Pc
PKINS 202060-EYP11	60	20	39	12,30	33,21
PKINS 202060-EYP01	60	20	39	12,30	33,21

PKINS..
scale 1:1

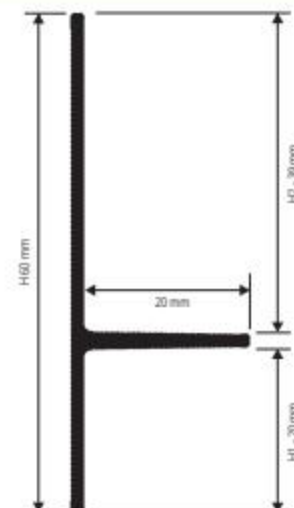

COLOURS



AA - Anod. silver aluminium

KALEICOS®

EASY LINE



EYP01 - MATT white varnished
(RAL 9016)

EYP11 - MATT black varnished

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Fix to the wall with adhesive "PROSKIRTING INS 202060" 2. Lay the plasterboard taking care to align it below with the horizontal section 3. Apply the desired finish 4. Immediately remove product residues from the profile surface.




PROSHADOW GAP 25

ANODISED SILVER AND VARNISHED ALUMINIUM

NEWS

PROSHADOW GAP 25 is an aluminium skirting board, anodised or painted, composed of a 34 mm vertical part, equipped with horizontal grooves to facilitate bonding and a 13 mm protruding horizontal part on which to place the plasterboard. An LED strip can be applied to the cavity created under the protruding part. The profile allows for a 25mm perimeter rabbet on the floor. PROSHADOW GAP 25 made of aluminum is suitable as a skirting board in any indoor environment.

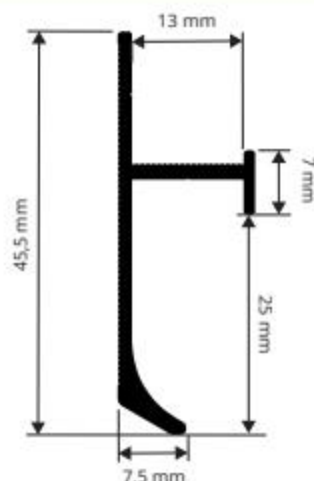

PSHDWSK 25...
scale 1:1



ALUMINIUM STONE LINE thermo packed
bar length 2 ml - pack 20 PCS - 40 ml


Article	H mm	€/ml	€/Pcs
PSHDWSK 25-SL05	25	22,40	44,80
PSHDWSK 25-SL08	25	22,40	44,80
PSHDWSK 25-SL18	25	22,40	44,80



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2 ml - pack 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PSHDWSKAA 25	25	14,00	28,00

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

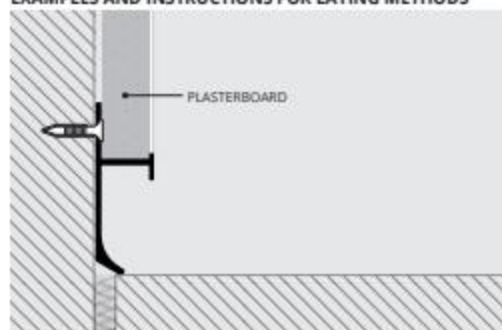

1. Choose PROSHADOW GAP 25 depending on the desired finish.
2. Cut PROSHADOW GAP 25 to the desired length.
3. Secure the profile to the wall with screws or adhesive.
4. Lay the gypsum board taking care to align it at the bottom with the horizontal section.
5. Immediately remove product residue from the profile surface.

ALUMINIUM EASY LINE thermo packed
bar length 2 ml - pack 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PSHDWSK 25-EYP01	25	16,80	33,60
PSHDWSK 25-EYP11	25	16,80	33,60

COLOURS

KALEIDOS



AA - Anod. silver aluminium



SL05 - Stone gray



SL08 - Stone antrdark



SL18 - Stone white cement

EASY LINE



EYP01 - MATT white varnished (RAL 9016)



EYP11 - MATT black varnished

END CAPS

ANODISED SILVER AND VARNISHED ALUMINIUM

Available from June 2026

END CAPS R / L - ANODISED SILVER ALUMINIUM
pack 2 Pcs (1 right and 1 left)


Article	H mm	€/Pack
TPSHDWSKAA 25/1	25	13,00

END CAPS R / L - ALUMINIUM STONE LINE
pack 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack
TPSHDWSK 25-SL05/1	25	20,80
TPSHDWSK 25-SL08/1	25	20,80
TPSHDWSK 25-SL18/1	25	20,80

END CAPS R / L - ALUMINIUM EASY LINE
pack 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack
TPSHDWSK 25-EYP01/1	25	15,60
TPSHDWSK 25-EY011/1	25	15,60

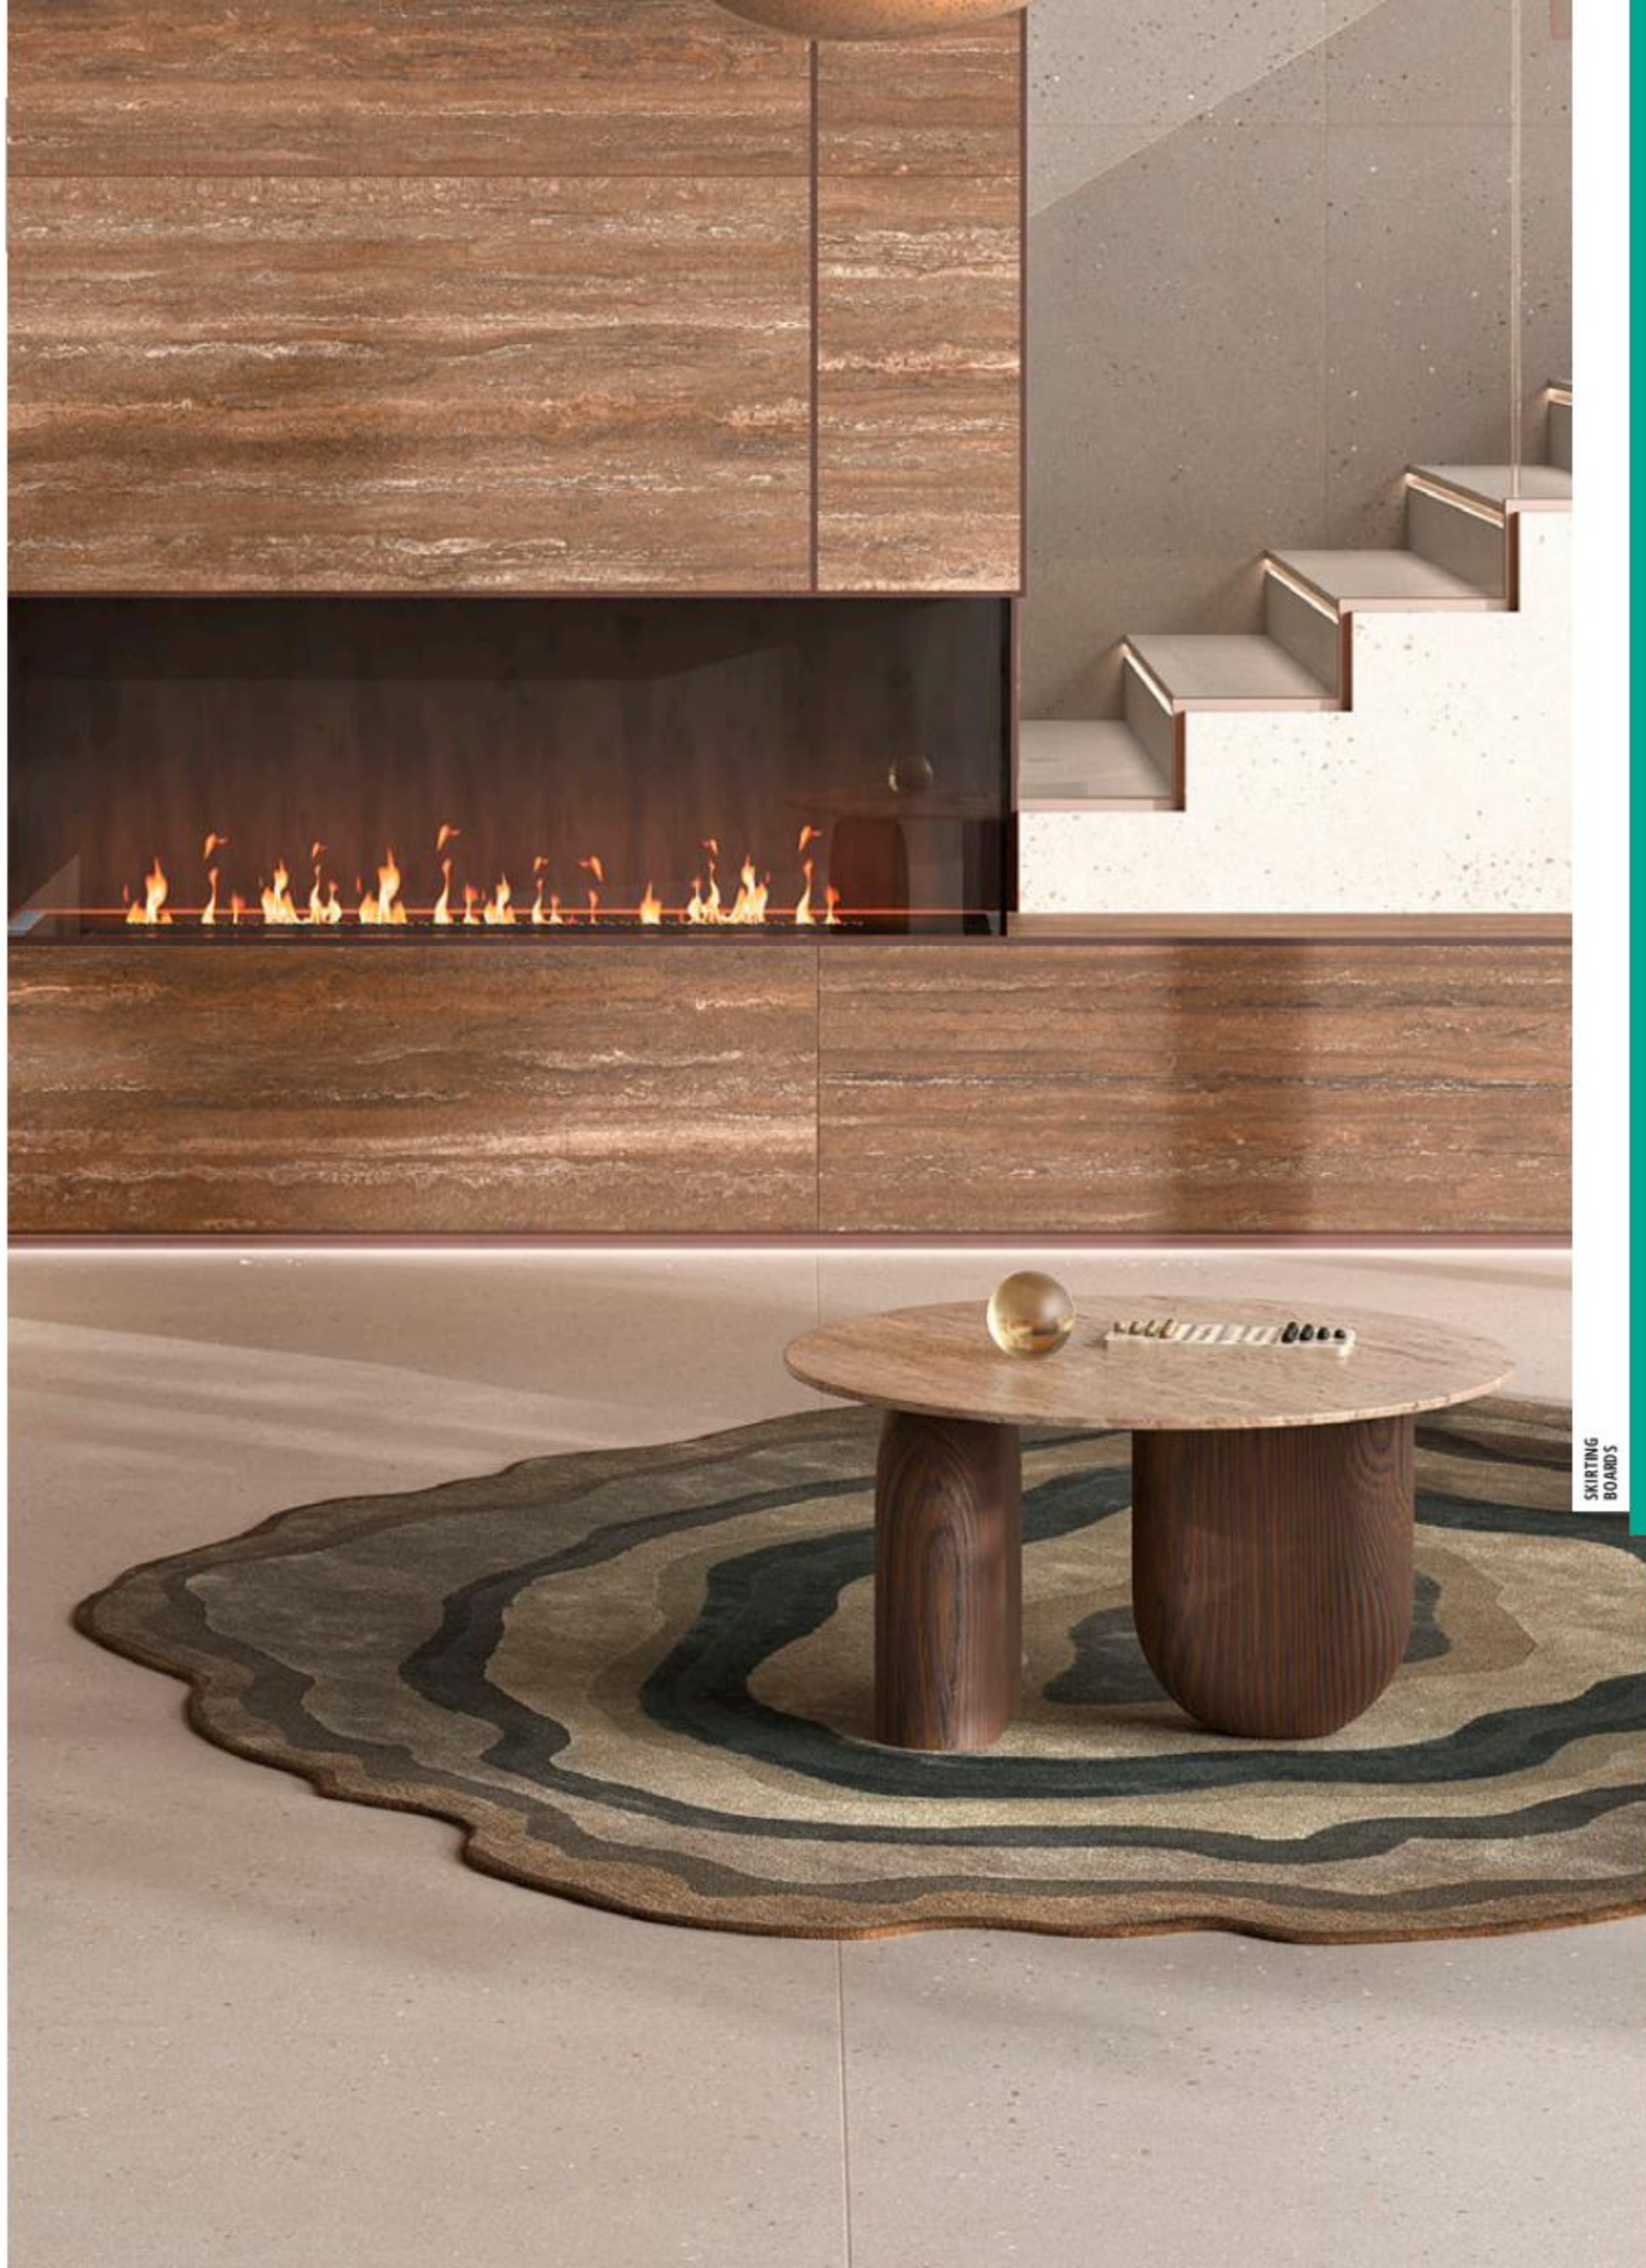


PROSHADOW GAP 2520

VARNISHED ALUMINIUM

PROSHADOW GAP 2520 is an aluminum skirting board, anodized or painted, composed of a 53 mm vertical part, equipped with horizontal grooves to facilitate bonding and a 20 mm protruding horizontal part on which to rest the gypsum board. In the cavity that is created under the protruding part, an LED strip can be applied and possibly closed with a polycarbonate plate. The profile allows for a 25 mm perimeter rabbet on the floor. PROSHADOW GAP 2520 made of aluminum is suitable as a skirting board in any indoor environment.

NEWS

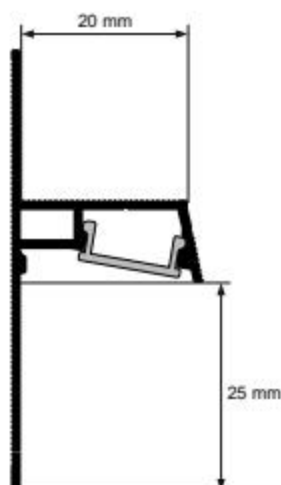

PSHDWSK 2520...
scale 1:1



ALUMINIUM EASY LINE thermo packed
bar length 2 ml - pack 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PSHDWSK 2520-EYP01	25	21,84	43,68
PSHDWSK 2520-EYP11	25	21,84	43,68




POLYCARBONATE COVER LED PROFILE
bar length 2 ml

Article	€/ml	€/Pcs
PSHDWPIAO	5,39	10,78



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

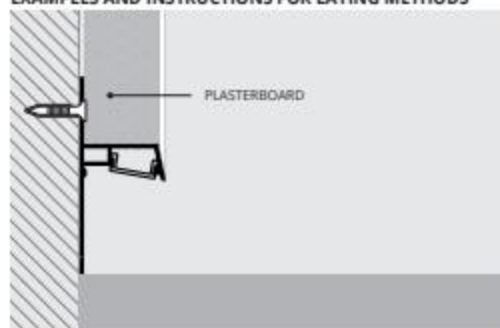

1. Choose PROSHADOW GAP 2520 depending on the desired finish.
2. Cut PROSHADOW GAP 2520 to the desired length.
3. Secure the profile to the wall with screws or adhesive.
4. Lay the gypsum board taking care to align it at the bottom with the horizontal section.
5. Immediately remove product residue from the profile surface.

COLOURS KALEIDOS

EASY LINE

EYP01 - MATT white varnished (RAL 9016)	EYP11 - MATT black varnished

END CAPS

VARNISHED ALUMINIUM

Available from June 2026

END CAPS R / L - ALUMINIUM EASY LINE

pack 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack
TPSHDWSK 2520-EYP01/1	25	20,28
TPSHDWSK 2520-EYP11/1	25	20,28

NEWS

PROSHADOW GAP 2513 is an aluminum skirting board, anodized or painted, composed of a 53 mm vertical part, equipped with horizontal grooves to facilitate bonding and a 13 mm protruding horizontal part on which to rest the gypsum board. In the cavity that is created under the protruding part, an LED strip can be applied and possibly closed with a polycarbonate plate. The profile allows for a 25 mm perimeter rabbet on the floor. PROSHADOW GAP 2513 made of aluminum is suitable as a skirting board in any indoor environment.

PROSHADOW GAP 2513

VARNISHED ALUMINIUM



ALUMINIUM EASY LINE thermo packed
bar lenght 2 ml - pack. 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PSHDWSK 2513-EYP01	25	19,32	38,64
PSHDWSK 2513-EYP11	25	19,32	38,64




POLYCARBONATE COVER LED PROFILE
bar lenght 2 ml

Article	€/ml	€/Pcs
PSHDWPIAO	5,39	10,78




PSHDWSK 2513...
scale 1:1

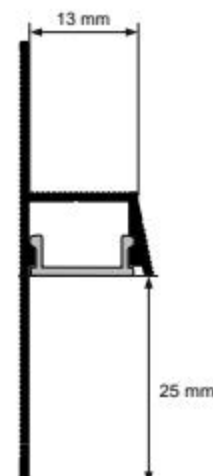

COLOURS KALEICOS® EASY LINE

EYP01 - MATT white varnished (RAL 9016)	EYP11 - MATT black varnished

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

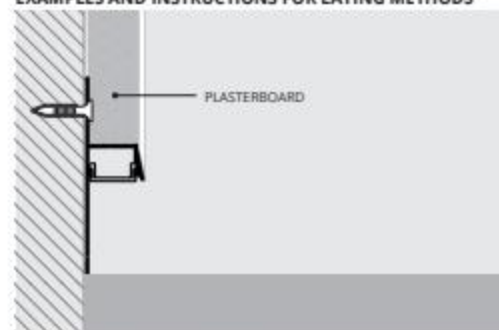

1. Choose PROSHADOW GAP 2513 depending on the desired finish.
2. Cut PROSHADOW GAP 2513 to the desired length.
3. Secure the profile to the wall with screws or adhesive.
4. Lay the gypsum board taking care to align it at the bottom with the horizontal section.
5. Immediately remove product residue from the profile surface.

END CAPS

VARNISHED ALUMINIUM

Available from June 2026

END CAPS R / L - ALUMINIUM EASY LINE
pack. 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack
TPSHDWSK 2513-EYP01/1	25	17,94
TPSHDWSK 2513-EYP11/1	25	17,94


PROSKIRTING ROUND 40

ANODISED SILVER AND VARNISHED ALUMINIUM


PROSKIRTING ROUND 40 is an anodized, polished, brushed and painted aluminum skirting board profile in various versions, 60 mm high and 10 mm wide which can be fixed directly to the wall with adhesive or via an aluminum support. The aluminum support is 20 mm long and is fixed with dowels to the wall, approximately every 50 cm. PROSKIRTING ROUND 40 in aluminum is suitable as a skirting board in any internal environment.

Available from June 2026

NEWS

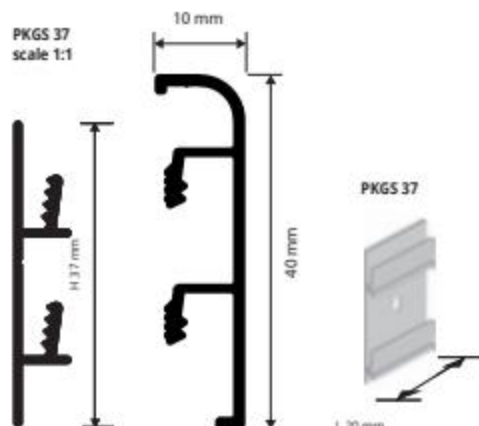

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

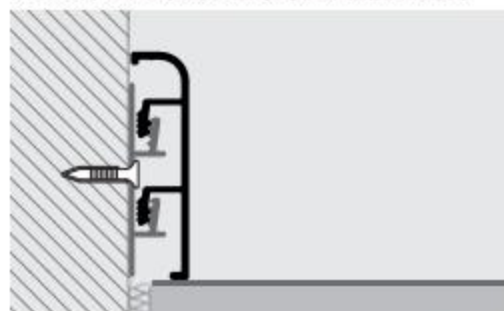

1. Choose "PROSKIRTING ROUND 40" according to the desired finish. 2. Fix the perforated support to the wall with the dowels every approximately 50 cm. 3. If applicable, install low voltage electrical cables such as network, telephone, TV and satellite cables. 4. Fix "PROSKIRTING ROUND 40" to the supports.



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2 ml - pack. 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PKRAA 40	40	9,80	19,60



ALUMINIUM STONE LINE thermo packed
bar length 2 ml - pack. 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PKRA 40-SL01	40	15,68	31,36
PKRA 40-SL05	40	15,68	31,36
PKRA 40-SL18	40	15,68	31,36

PUNCHED SUPPORT - Natural aluminium
bar length 2 cm - pack. 1 PCS

Article	H mm	€/pack.
PKGS 37	37	0,35

ALUMINIUM EASY LINE thermo packed
bar length 2 ml - pack. 20 PCS - 40 ml


Article	H mm	€/ml	€/Pcs
PKRA 40-EYP01	40	11,62	23,24
PKRA 40-EYP11	40	11,62	23,24

COLOURS

KALEIDOS



AA - Anod, silver aluminium



SL01 - Stone white



SL05 - Stone gray



SL18 - Stone white cement



EYP01 - MATT white varnished (RAL 9016)



EYP11 - MATT black varnished

INTERNAL and EXTERNAL CORNERS, END CAPS

ANODISED SILVER AND VARNISHED ALUMINIUM

EXTERNAL CORNER - ANODISED SILVER ALUMINIUM
pack. 1 PCS

Article	H mm	€/Pack
REPKRAA 40/1	40	8,49

EXTERNAL CORNER - ALUMINIUM STONE LINE
pack. 1 PCS

Article	H mm	€/Pack
REPKRA 40-SL01/1	40	13,58
REPKRA 40-SL05/1	40	13,58
REPKRA 40-SL18/1	40	13,58

EXTERNAL CORNER - ALUMINIUM EASY LINE
pack. 1 PCS

Article	H mm	€/Pack
REPKRA 40-EYP01/1	40	10,19
REPKRA 40-EYP11/1	40	10,19

INTERNAL CORNER - ANODISED SILVER ALUMINIUM
pack. 1 PCS

Article	H mm	€/Pack
RIPKRAA 40/1	40	8,49

INTERNAL CORNER - ALUMINIUM STONE LINE
pack. 1 PCS

Article	H mm	€/Pack
RIPKRA 40-SL01/1	40	13,58
RIPKRA 40-SL05/1	40	13,58
RIPKRA 40-SL18/1	40	13,58

INTERNAL CORNER - ALUMINIUM EASY LINE
pack. 1 PCS

Article	H mm	€/Pack
RIPKRA 40-EYP01/1	40	10,19
RIPKRA 40-EYP11/1	40	10,19

END CAPS R / L - ANODISED SILVER ALUMINIUM
pack. 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack
TPKRAA 40/1	40	16,34

END CAPS R / L - ALUMINIUM STONE LINE
pack. 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack
TPKRA 40-SL01/1	40	26,14
TPKRA 40-SL05/1	40	26,14
TPKRA 40-SL18/1	40	26,14

END CAPS R / L - ALUMINIUM EASY LINE
pack. 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack
TPKRA 40-EYP01/1	40	19,6
TPKRA 40-EYP11/1	40	19,6

NEWS

PROSKIRTING ROUND 60 is an anodized, polished, brushed and painted aluminum skirting board profile in various versions, 60 mm high and 10 mm wide which can be fixed directly to the wall with adhesive or via an aluminum support. The aluminum support is 20 mm long and is fixed with dowels to the wall, approximately every 50 cm. PROSKIRTING ROUND 60 in aluminum is suitable as a skirting board in any internal environment.

Available from June 2026

PROSKIRTING ROUND 60

ANODISED SILVER AND VARNISHED ALUMINIUM

Available from June 2026



ANODIZED SILVER ALUMINIUM thermo packed
bar lenght 2 ml - pack. 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PKRAA 60	60	12,23	24,46



ALUMINIUM STONE LINE thermo packed
bar lenght 2 ml - pack. 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PKRA 60-SL01	60	19,57	39,14
PKRA 60-SL05	60	19,57	39,14
PKRA 60-SL08	60	19,57	39,14
PKRA 60-SL18	60	19,57	39,14

PUNCHED SUPPORT - Natural aluminium
bar lenght 2 cm - pack. 1 PCS

Article	H mm	€/pack.
PKGS 37	37	0,35

ALUMINIUM EASY LINE thermo packed
bar lenght 2 ml - pack. 20 PCS - 40 ml


Article	H mm	€/ml	€/Pcs
PKRA 60-EYP01	60	14,68	29,36
PKRA 60-EYP11	60	14,68	29,36

COLOURS


KALEIDOS

STONE LINE

EASY LINE




AA - Anod. silver aluminium



SL01 - Stone white



SL05 - Stone gray




SL08 - Stone antiradark




SL18 - Stone white cement



EYP01 - MATT white varnished (RAL 9016)



EYP11 - MATT black varnished

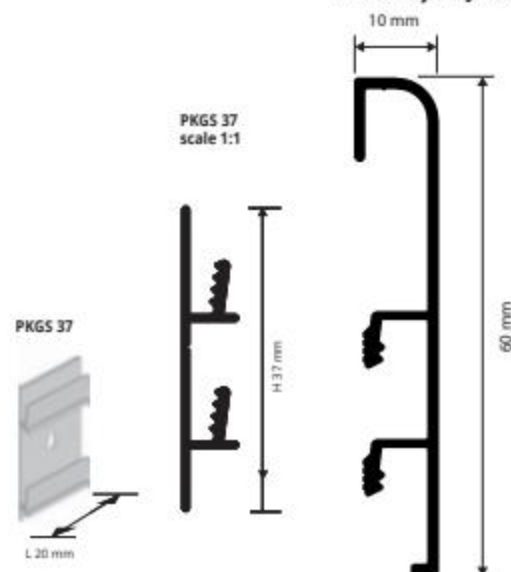

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROSKIRTING ROUND 60" according to the desired finish.
2. Fix the perforated support to the wall with the dowels every approximately 50 cm.
3. If applicable, install low voltage electrical cables such as network, telephone, TV and satellite cables.
4. Fix "PROSKIRTING ROUND 60" to the supports.

INTERNAL and EXTERNAL CORNERS, END CAPS

ANODISED SILVER AND VARNISHED ALUMINIUM

EXTERNAL CORNER - ANODISED SILVER ALUMINIUM
pack. 1 PCS

Article	H mm	€/Pack
REPKRAA 60/1	60	10,60

EXTERNAL CORNER - ALUMINIUM STONE LINE
pack. 1 PCS

Article	H mm	€/Pack
REPKRA 60-SL01/1	60	16,96
REPKRA 60-SL05/1	60	16,96
REPKRA 60-SL08/1	60	16,96
REPKRA 60-SL18/1	60	16,96

EXTERNAL CORNER - ALUMINIUM EASY LINE
pack. 1 PCS

Article	H mm	€/Pack
REPKRA 60-EYP01/1	60	12,72
REPKRA 60-EYP11/1	60	12,72

INTERNAL CORNER - ANODISED SILVER ALUMINIUM
pack. 1 PCS

Article	H mm	€/Pack
RIPKRAA 60/1	60	10,60

INTERNAL CORNER - ALUMINIUM STONE LINE
pack. 1 PCS

Article	H mm	€/Pack
RIPKRA 60-SL01/1	60	16,96
RIPKRA 60-SL05/1	60	16,96
RIPKRA 60-SL08/1	60	16,96
RIPKRA 60-SL18/1	60	16,96

INTERNAL CORNER - ALUMINIUM EASY LINE
pack. 1 PCS

Article	H mm	€/Pack
RIPKRA 60-EYP01/1	60	12,72
RIPKRA 60-EYP11/1	60	12,72

END CAPS R / L - ANODISED SILVER ALUMINIUM
pack. 2 Pcs (1 right and 1 left)


Article	H mm	€/Pack
TPKRAA 60/1	60	17,32

END CAPS R / L - ALUMINIUM STONE LINE
pack. 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack
TPKRA 60-SL01/1	60	27,72
TPKRA 60-SL05/1	60	27,72
TPKRA 60-SL08/1	60	27,72
TPKRA 60-SL18/1	60	27,72

END CAPS R / L - ALUMINIUM EASY LINE
pack. 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack
TPKRA 60-EYP01/1	60	20,78
TPKRA 60-EYP11/1	60	20,78

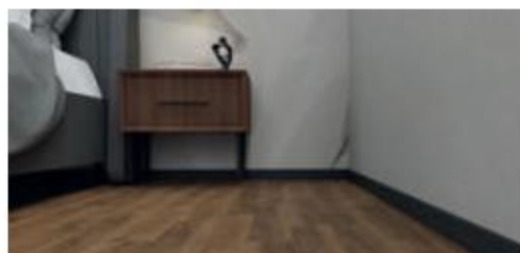

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


PROSKIRTING ROUND 80

ANODISED SILVER AND VARNISHED ALUMINIUM


PROSKIRTING ROUND 80 is an anodized, polished, brushed and painted aluminum skirting board profile in various versions, 80 mm high and 10 mm wide which can be fixed directly to the wall with adhesive or via an aluminum support. The aluminum support is 20 mm long and is fixed with dowels to the wall, approximately every 50 cm. PROSKIRTING ROUND 80 in aluminum is suitable as a skirting board in any internal environment.

Available from June 2026

NEWS

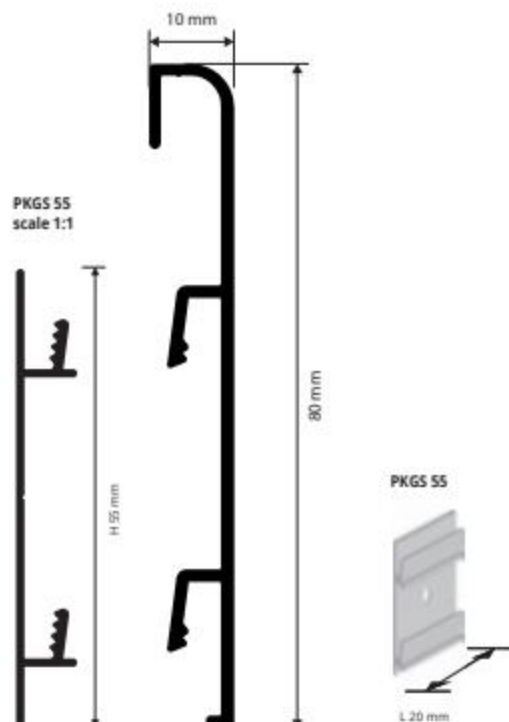

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

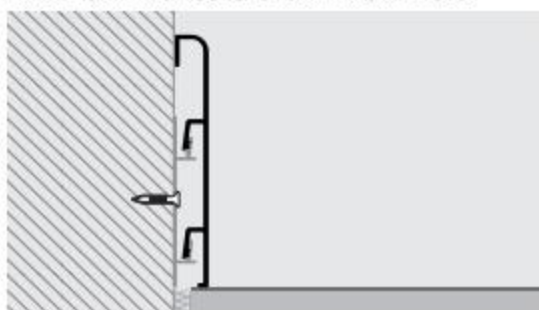

1. Choose "PROSKIRTING ROUND 40" according to the desired finish. 2. Fix the perforated support to the wall with the dowels every approximately 50 cm. 3. If applicable, install low voltage electrical cables such as network, telephone, TV and satellite cables. 4. Fix "PROSKIRTING ROUND 40" to the supports.



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2 ml - pack. 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PKRAA 80	80	14,08	28,16

PUNCHED SUPPORT - Natural aluminium
bar length 2 cm - pack. 1 PCS

Article	H mm	€/pack.
PKGS 55	55	0,37



ALUMINIUM STONE LINE thermo packed
bar length 2 ml - pack. 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PKRA 80-SL01	80	22,88	45,76
PKRA 80-SL05	80	22,88	45,76
PKRA 80-SL18	80	22,88	45,76

ALUMINIUM EASY LINE thermo packed
bar length 2 ml - pack. 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PKRA 80-EYP01	80	16,90	33,80
PKRA 80-EYP11	80	16,90	33,80

COLOURS

KALEIDOS

AA - Anod. silver aluminium	STONE LINE			EASY LINE	
	SL01 - Stone white	SL05 - Stone gray	SL18 - Stone white cement	EYP01 - MATT white varnished (RAL 9016)	EYP11 - MATT black varnished

INTERNAL and EXTERNAL CORNERS, END CAPS

ANODISED SILVER AND VARNISHED ALUMINIUM

EXTERNAL CORNER - ANODISED SILVER ALUMINIUM
pack. 1 PCS

Article	H mm	€/Pack
REPKRAA 80/1	80	11,42

EXTERNAL CORNER - ALUMINIUM STONE LINE
pack. 1 PCS

Article	H mm	€/Pack
REPKRA 80-SL01/1	80	18,27
REPKRA 80-SL05/1	80	18,27
REPKRA 80-SL18/1	80	18,27

EXTERNAL CORNER - ALUMINIUM EASY LINE
pack. 1 PCS

Article	H mm	€/Pack
REPKRA 80-EYP01/1	80	13,71
REPKRA 80-EYP11/1	80	13,71

INTERNAL CORNER - ANODISED SILVER ALUMINIUM
pack. 1 PCS

Article	H mm	€/Pack
RIPKRAA 80/1	40	11,42

INTERNAL CORNER - ALUMINIUM STONE LINE
pack. 1 PCS

Article	H mm	€/Pack
RIPKRA 80-SL01/1	80	18,27
RIPKRA 80-SL05/1	80	18,27
RIPKRA 80-SL18/1	80	18,27

INTERNAL CORNER - ALUMINIUM EASY LINE
pack. 1 PCS

Article	H mm	€/Pack
RIPKRA 80-EYP01/1	80	13,71
RIPKRA 80-EYP11/1	80	13,71

END CAPS R / L - ANODISED SILVER ALUMINIUM
pack. 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack
TPKRAA 80/1	80	18,30

END CAPS R / L - ALUMINIUM STONE LINE
pack. 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack
TPKRA 80-SL01/1	80	29,28
TPKRA 80-SL05/1	80	29,28
TPKRA 80-SL18/1	80	29,28

END CAPS R / L - ALUMINIUM EASY LINE
pack. 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack
TPKRA 80-EYP01/1	80	21,94
TPKRA 80-EYP11/1	80	21,94

NEWS
KALEIDOS

PROSKIRTING LIST is a skirting/baseboard profile in different finishes anodized and varnished aluminium, 40 mm high and 10 mm wide which can be fixed directly to the wall with adhesive (PKLT ... 40A non-inspectable version) or with aluminum supports (inspectable version PKLT ... 40). The aluminum supports, 20 mm long, are fixed with plugs to the wall, every about 50 cm. PROSKIRTING LIST 40 in aluminum is suitable in any indoor environment.

PROSKIRTING LIST 40

ANODISED SILVER AND VARNISHED ALUMINIUM



ANODISED SILVER ALUMINIUM thermo packed
bar length 2 ml - pack. 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PKLTAA 40	40	9,80	19,60
PKLTAA 40A	40	12,73	25,46

*"A" at the end of the product code = Item with adhesive

PUNCHED SUPPORT - Natural aluminium
bar length 2 cm - pack. 1 PCS

Article	H mm	€/pack.
PKGS 37	37	0,35



VARNISHED ALUMINIUM thermo packed
bar length 2 ml - pack. 20 PCS - 40 ml


Article	H mm	€/ml	€/Pcs
PKLTA 40-SL01	40	15,68	31,36
PKLTA 40-SL01A	40	20,38	40,76
PKLTA 40-SL05	40	15,68	31,36
PKLTA 40-SL05A	40	20,38	40,76
PKLTA 40-SL18	40	15,68	31,36
PKLTA 40-SL18A	40	20,38	40,76

*"A" at the end of the product code = Item with adhesive

ALUMINIUM EASY LINE thermo packed
bar length 2 ml - pack. 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PKLTA 40-EYP01	40	11,62	23,24
PKLTA 40-EYP01A	40	15,11	30,22
PKLTA 40-EYP11	40	11,62	23,24
PKLTA 40-EYP11A	40	15,11	30,22

*"A" at the end of the product code = Item with adhesive

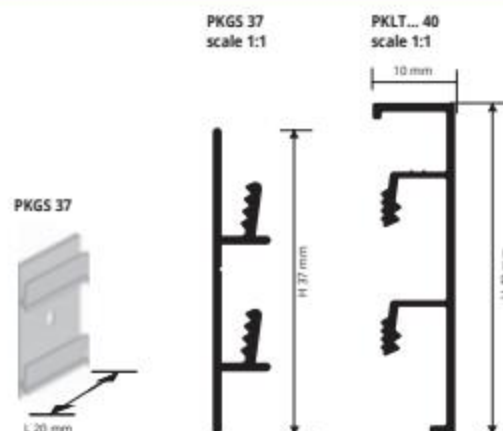

LAYING EXAMPLE



LAYING INSTRUCTIONS

1. Choose "PROSKIRTING LIST" in the desired finish and height. 2. Fix the punched support to the wall with screws every 50 cm. 3. If expected, laying the low-voltage electric cables like web, computer, telephone and satellite TV. 4. Attach the profile to the support applying low pressure.

COLOURS

KALEIDOS

STONE LINE



AA - Anod. silver aluminium



SL01 - Stone white



SL05 - Stone gray



SL18 - Stone white cement

EASY LINE



EYP01 - Matt white varnished (RAL 9016)



EYP11 - Matt black varnished

INTERNAL and EXTERNAL CORNERS, END CAPS

ANODISED SILVER AND VARNISHED ALUMINIUM

INTERNAL / EXTERNAL CORNER - ANODISED SILVER ALUMINIUM
pack. 1 PCS

Article	H mm	€/Pack
REPKLTA 40/1	40	8,49

INTERNAL / EXTERNAL CORNER - ALUMINIUM STONE LINE
pack. 1 PCS

Article	H mm	€/Pack
REPKLTA 40-SL01/1	40	13,25
REPKLTA 40-SL05/1	40	13,25
REPKLTA 40-SL18/1	40	13,25

INTERNAL / EXTERNAL CORNER - ALUMINIUM EASY LINE
pack. 1 PCS

Article	H mm	€/Pack
REPKLTA 40-EYP01/1	40	10,19
REPKLTA 40-EYP11/1	40	10,19

REPKLTA... 40/1



END CAPS - ANODISED SILVER ALUMINIUM
pack. 1 PCS

Article	H mm	€/Pack
TPKLTA 40/1	40	8,17

END CAPS - ALUMINIUM STONE LINE
pack. 1 PCS

Article	H mm	€/Pack
TPKLTA 40-SL01/1	40	13,07
TPKLTA 40-SL05/1	40	13,07
TPKLTA 40-SL18/1	40	13,07

END CAPS - ALUMINIUM EASY LINE
pack. 1 PCS

Article	H mm	€/Pack
TPKLTA 40-EYP01/1	40	9,80
TPKLTA 40-EYP11/1	40	9,80

TPKLTA... 40/1



PROSKIRTING LIST 60

ANODISED SILVER AND VARNISHED ALUMINIUM


PROSKIRTING LIST is a skirting/baseboard profile in different finishes anodized and varnished aluminium, 60 mm high and 10 mm wide which can be fixed directly to the wall with adhesive (PKLT .. 60A non-inspectable version) or with aluminum supports (inspectable version PKLT .. 60). The aluminum supports, 20 mm long, are fixed with plugs to the wall, every about 50 cm. PROSKIRTING LIST 60 in aluminum is suitable in any indoor environment.

Available from June 2026


NEWS

PKGS 37
scale 1:1

PKLT... 60
scale 1:1

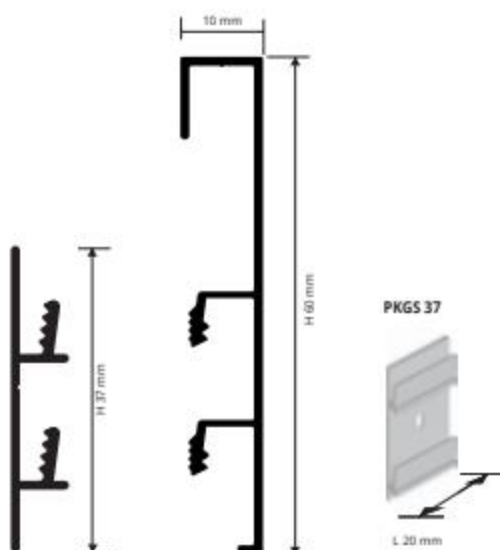

LAYING EXAMPLE

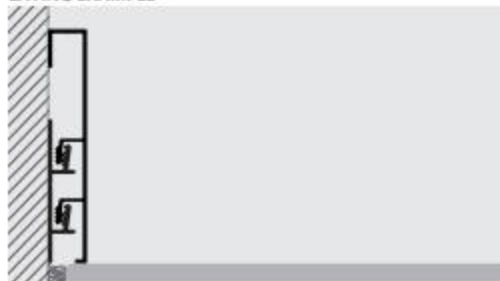

LAYING INSTRUCTIONS

1. Choose "PROSKIRTING LIST" in the desired finish and height.
2. Fix the punched support to the wall with screws every 50 cm.
3. If expected, laying the low-voltage electric cables like web, computer, telephone and satellite TV.
4. Attach the profile to the support applying low pressure.



ANODISED SILVER ALUMINIUM thermo packed
bar lenght 2 ml - pack. 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PKLTAA 60	60	12,23	24,46
PKLTAA 60A	60	15,90	31,80

"A" at the end of the product code = item with adhesive

PUNCHED SUPPORT - Natural aluminium

bar lenght 2 cm - pack. 1 PCS

Article	H mm	€/pack.
PKGS 37	37	0,35



VARNISHED ALUMINIUM thermo packed
bar lenght 2 ml - pack. 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PKLTA 60-SL01	60	19,57	39,14
PKLTA 60-SL01A	60	25,44	50,88
PKLTA 60-SL05	60	19,57	39,14
PKLTA 60-SL05A	60	25,44	50,88
PKLTA 60-SL08	60	19,57	39,14
PKLTA 60-SL08A	60	25,44	50,88
PKLTA 60-SL018	60	19,57	39,14
PKLTA 60-SL018A	60	25,44	50,88

"A" at the end of the product code = item with adhesive

ALUMINIUM EASY LINE thermo packed

bar lenght 2 ml - pack. 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PKLTA 60-EYP01	60	14,68	29,36
PKLTA 60-EYP01A	60	19,08	38,16
PKLTA 60-EYP11	60	14,68	29,36
PKLTA 60-EYP11A	60	19,08	38,16


"A" at the end of the product code = item with adhesive

COLOURS

KALEIDOS



AA - Anod. silver aluminium



SL01 - Stone white

STONE LINE



SL05 - Stone gray



SL08 - Stone antracite

EASY LINE



EYP01 - MATT white varnished (RAL 9016)



EYP11 - MATT black varnished



SL18 - Stone white cement

INTERNAL and EXTERNAL CORNERS, END CAPS

ANODISED SILVER AND VARNISHED ALUMINIUM

End caps
TPKLT... 60/1

Internal / external corners
REP... 60/1



INTERNAL / EXTERNAL CORNER - ANODISED SILVER ALUMINIUM pack. 1 PCS

Article	H mm	€/Pack
REP... 60/1	60	10,60

INTERNAL / EXTERNAL CORNER - ALUMINIUM STONE LINE pack. 1 PCS

Article	H mm	€/Pack
REP... 60-SL01/1	60	16,96
REP... 60-SL05/1	60	16,96
REP... 60-SL08/1	60	16,96
REP... 60-SL18/1	60	16,96

INTERNAL / EXTERNAL CORNER - ALUMINIUM EASY LINE pack. 1 PCS

Article	H mm	€/Pack
REP... 40-EYP01/1	40	12,72
REP... 40-EYP11/1	40	12,72

END CAPS - ANODISED SILVER ALUMINIUM pack. 1 PCS

Article	H mm	€/Pack
TPK... 60/1	60	8,66

END CAPS - ALUMINIUM STONE LINE pack. 1 PCS

Article	H mm	€/Pack
TPK... 60-SL01/1	60	13,86
TPK... 60-SL05/1	60	13,86
TPK... 60-SL08/1	60	13,86
TPK... 60-SL18/1	60	13,86

END CAPS - ALUMINIUM EASY LINE pack. 1 PCS

Article	H mm	€/Pack
TPK... 60-EYP01/1	60	10,39
TPK... 60-EYP11/1	60	10,39

PROSKIRTING LIST is a skirting/baseboard profile in different finishes anodized and varnished aluminium, 80 mm high and 10 mm wide which can be fixed directly to the wall with adhesive (PKLT .. 80A non-inspectable version) or with aluminum supports (inspectable version PKLT .. 80). The aluminum supports, 20 mm long, are fixed with plugs to the wall, every about 50 cm. PROSKIRTING LIST 80 in aluminum is suitable in any indoor environment.

PROSKIRTING LIST 80

ANODISED SILVER AND VARNISHED ALUMINIUM



ANODISED SILVER ALUMINIUM thermo packed
bar lenght 2 ml - pack. 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PKLTAA 80	80	14,30	28,60
PKLTAA 80A	80	18,61	37,22

"A" at the end of the product code = Item with adhesive

PUNCHED SUPPORT - Natural aluminium
bar lenght 2 cm - pack. 1 PCS

Article	H mm	€/pack.
PKGS 55	55	0,37



VARNISHED ALUMINIUM thermo packed
bar lenght 2 ml - pack. 20 PCS - 40 ml


Article	H mm	€/ml	€/Pcs
PKLTA 80-SL01	80	22,88	45,76
PKLTA 80-SL01A	80	29,74	59,48
PKLTA 80-SL05	80	22,88	45,76
PKLTA 80-SL05A	80	29,74	59,48
PKLTA 80-SL018	80	22,88	45,76
PKLTA 80-SL018A	80	29,74	59,48

"A" at the end of the product code = Item with adhesive


ALUMINIUM EASY LINE thermo packed
bar lenght 2 ml - pack. 20 PCS - 40 ml

Article	H mm	€/ml	€/Pcs
PKLTA 80-EYP01	80	16,90	33,80
PKLTA 80-EYP01A	80	21,94	43,88
PKLTA 80-EYP11	80	16,90	33,80
PKLTA 80-EYP11A	80	21,94	43,88

"A" at the end of the product code = Item with adhesive

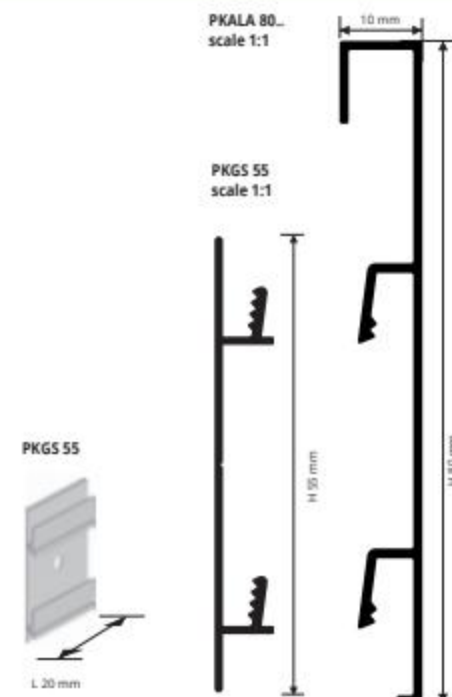

EXAMPLE FOR THE LAYING

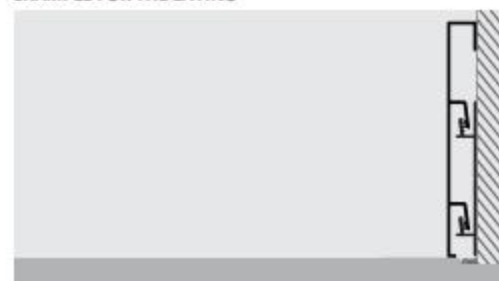

ISTRUZIONI TECNICHE DI POSA



1. Choose "PROSKIRTING LIST" in the desired finish and height.
2. Fix the punched support to the wall with screws every 50 cm.
3. If expected, laying the low-voltage electric cables like web, computer, telephone and satellite TV.
4. Attach the profile to the support applying low pressure.

COLOURS

KALEIDOS

STONE LINE

EASY LINE



INTERNAL and EXTERNAL CORNERS, END CAPS

ANODISED SILVER AND VARNISHED ALUMINIUM

INTERNAL / EXTERNAL CORNER - ANODISED SILVER ALUMINIUM
pack. 1 PCS

Article	H mm	€/Pack
REPCLTAA 80/1	80	11,42

INTERNAL / EXTERNAL CORNER - ALUMINIUM STONE LINE
pack. 1 PCS

Article	H mm	€/Pack
REPCLTA 80-SL01/1	80	18,27
REPCLTA 80-SL05/1	80	18,27
REPCLTA 80-SL18/1	80	18,27

INTERNAL / EXTERNAL CORNER - ALUMINIUM EASY LINE
pack. 1 PCS

Article	H mm	€/Pack
REPCLTA 80-EYP01/1	80	13,71
REPCLTA 80-EYP11/1	80	13,71

END CAPS - ANODISED SILVER ALUMINIUM
pack. 1 PCS

Article	H mm	€/Pack
TPKLTA 80/1	80	9,15

END CAPS - ALUMINIUM STONE LINE
pack. 1 PCS

Article	H mm	€/Pack
TPKLTA 80-SL01/1	80	14,64
TPKLTA 80-SL05/1	80	14,64
TPKLTA 80-SL18/1	80	14,64

END CAPS - ALUMINIUM EASY LINE
pack. 1 PCS

Article	H mm	€/Pack
TPKLTA 80-EYP01/1	80	10,97
TPKLTA 80-EYP11/1	80	10,97

End caps
TPKLT... 80/1




Internal / external corners
REPCLT... 80/1



PROSKIRTING

ANODIZED SILVER ALUMINIUM

PROSKIRTING is an innovative patented "cable channel" skirting in anodized aluminium. Studied and designed to resolve various problems related to the installation of skirting and to the laying of electrical, computer and telephone cables and other service systems. **PROSKIRTING** has been designed to offer a dual function: 1- **PROSKIRTING** complete PKAA 80 is a snap-on inspectable skirting consisting of a support PKGS 66 to be screwed to the wall and the visible profile **PROSKIRTING** PKAA 80. 2- **PROSKIRTING** PKAA 80 is the visible skirting profile to be fixed directly with silicone/adhesive. It is not inspectable like **PROSKIRTING** complete; it is also available in a self-adhesive version (PKAA 80A).

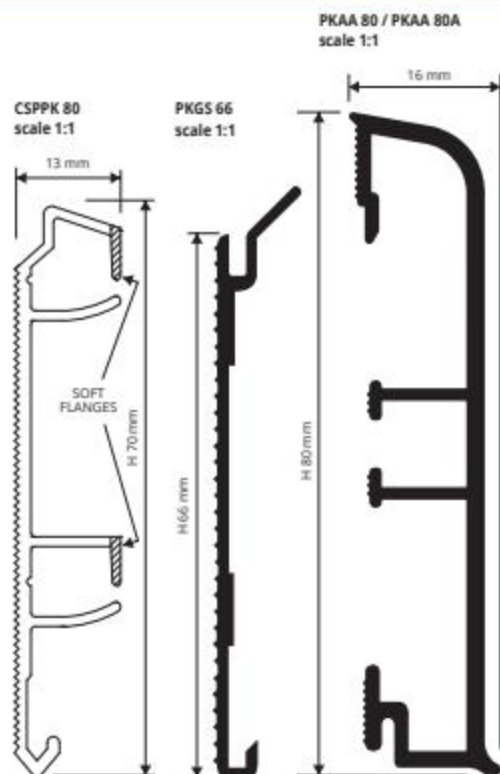

ONLY SKIRTING (for sale singly) - ANODIZED SILVER ALUMINIUM
thermo packed - bar length 2 lm - pack. 10 Pcs - 20 lm

Article	H mm	€/lm	€/Pc
PKAA 80	80	15,70	31,40
PKAA 80A	80	20,63	41,26

*"A" at the end of the product code = item with adhesive

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



Advantages: profile to be glued. Aesthetically superior thanks to the HI-TECH design with rounded shell-shape top and bottom edges that are easy to clean. **PROSKIRTING** is made in anodized aluminium with silver finish; the anodizing layer is approx. 15/20 micron. Recommended for indoor and outdoor use thanks to its good anti-oxidation properties.

- Single visible skirting profile, which may be inspectable or fixed.
- Minimum stock investment with just 2 products for three functions.
- Easy to install and clean.
- Patented innovative HI-TECH design.
- Inside-outside corners-end caps and joints varnished in the same finish as the profile.
- The **PROSKIRTING** profile is antistatic and stops electromagnetic and electrostatic discharge.



CABLE RACEWAY/ SUPPORT - COEXTRUDED PVC
bar length 2 lm - pack. 20 Pcs - 40 lm

Article	€/lm	€/Pc
CSPPK 80	5,86	11,72

PUNCHED SUPPORT - NATURAL ALUMINIUM
support length 2 cm - pack. 1 Pcs

Article	H mm	€/Pack.
PKGS 66	66	0,37


ARTICLES NOT FOR SALE SINGLY




COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

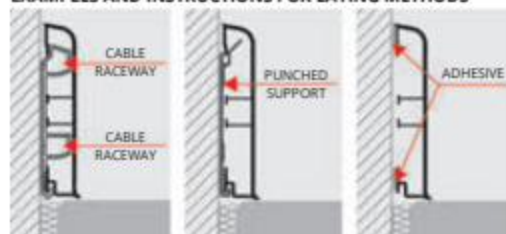

1. Choose the system with or without support 2. Fix the support to the wall with screws and screw anchors at 50 cm intervals (recommended). 3. When laying without support, thoroughly clean the surface ensuring that it is grease-free and dry, apply the silicone on the knurled sides of the profiles and lay correctly by applying pressure evenly over the whole profile without using a hammer. 4. For the "PROSKIRTING" with adhesive, application is recommended at a temperature of at least 15°. Always use the inside/outside corner linking elements and end caps for impeccable, faultless laying.




POWER SUPPLY BOX
SOCKET with FASTENING BASIS

Article	€/Pc
SPA 1820	22,08

SWITCH BOX
with BOX BASIS

Article	€/Pc
SI 1410	18,64



JUNCTION BOX
with FASTENING BASIS

Article	€/Pc
SD 1210	16,57

VERTICAL CABLE DUCT PROFILE
bar length 2,7 lm

Article	€/lm
PSPV	12,44

It matches with CSPPK 80

CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC SILVER FINISH.



PKAGI 80/1
internal corner



PKAGE 80/1
external corner



PKGIN 80/1
JOINT



PKTDSAA 80/1
end caps

IN/EXTERNAL CORNER - VARNISHED PLASTIC (silver finish.)

pack. 1 Pcs

Article	H x L mm	€/Pack.
PKAGI 80/1	80 x 40	5,08
PKAGE 80/1	80 x 40	5,08

JOINTS - VARNISHED PLASTIC (silver finish.) - pack. 1 Pcs

Article	H mm	€/Pack.
PKGIN 80/1	80	4,13

END CAPS R / L - VARNISHED PLASTIC (silver finish.)

pack. 2 Pcs (1 right and 1 left)


Article	H mm	€/Pack.
PKTDSAA 80/1	80	8,25





SKIRTING 40

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

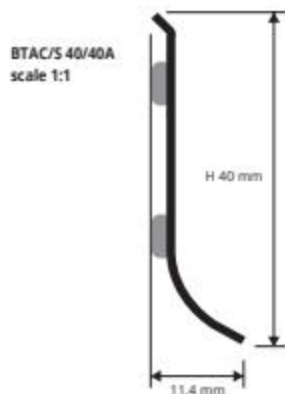

SKIRTING 40 made in stainless steel AISI 304/1.4301-V2A in height 40 mm. Available with or without adhesive. Superior aesthetic quality, extremely strong and easy to lay, it is ideal for all public and private environments that require high standards of hygiene and image. Used increasingly more often in contrast combinations with wood, carpeted floors, etc. for an unmistakable hi-tech effect. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm	€/lm	€/Pc
BTAC 40A	40	10,38	20,76
BTAC 40	40	9,47	18,94

"A" at the end of the product code = item with adhesive



BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - 2 lm - pack. 25 Pcs - 50 lm

Article	H mm	€/lm	€/Pc
BTACS 40A	40	12,10	24,20
BTACS 40	40	11,05	22,10

"A" at the end of the product code = item with adhesive

EXAMPLES OF LAYING



LAYING INSTRUCTIONS

1. Choose the "SKIRTING 40" also choose with or without adhesive.
2. Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints. 3. For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.). 4. Use the corner linking elements-joints and right and left end caps to facilitate laying.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



COLOURS

AC - Polished stainless steel AISI 304/1.4301-V2A	ACS - Brushed stainless steel AISI 304/1.4301-V2A
--	--

CORNERS, END CAPS AND JOINTS

STEEL and VARNISHED METAL

EDGE COVER VARNISHED METAL



RIZCT... 40/1
internal corner



REZCT... 40/1
external corner



GIZCT... 40/1
joint




TPZCT... 40/1
end caps

PRE-WELDED



RI... 40/1
internal corner



RE... 40/1
external corner

VARNISHED METAL - EDGE COVER CORNERS

INTERNAL/EXTERNAL CORNER - EDGE COVER

VARNISHED METAL POLISHED STEEL EFFECT - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTAC 40/1	40 x 20	14,70
REZCTAC 40/1	40 x 20	14,70

JOINT - EDGE COVER

VARNISHED METAL POLISHED STEEL EFFECT - pack. 1Pc

Article	H mm	€/Pc
GIZCTAC 40/1	40	14,27

END CAPS R / L - EDGE COVER - VARNISHED METAL POLISHED STEEL EFFECT - pack. 2Pcs (1 R + 1 L)

Article	H mm	€/pack.
TPZCTAC 40/1	40	28,54

INTERNAL/EXTERNAL CORNER - EDGE COVER

VARNISHED METAL BRUSHED STAINLESS ST. EFFECT - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTACS 40/1	40 x 20	14,70
REZCTACS 40/1	40 x 20	14,70

JOINT - EDGE COVER

VARNISHED METAL BRUSHED STAINLESS ST. EFFECT - pack. 1Pc

Article	H mm	€/Pc
GIZCTACS 40/1	40	14,27

END CAPS R / L - EDGE COVER - VARNISHED METAL BRUSHED STAINLESS ST. EFFECT - pack. 2Pcs (1 R + 1 L)

Article	H mm	€/pack.
TPZCTACS 40/1	40	28,54

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS

INTERNAL/EXTERNAL CORNER

FLUSH PRE-WELDED - POLISHED STEEL EFFECT - pack. 1Pc

Article	HxL mm	€/Pc
RIAC 40/1	40 x 50	23,39
REAC 40/1	40 x 50	23,39

INTERNAL/EXTERNAL CORNER

FLUSH PRE-WELDED - BRUSHED STAINLESS STEEL - pack. 1Pc

Article	HxL mm	€/Pc
RIACS 40/1	40 x 50	24,78
REACS 40/1	40 x 50	24,78

SKIRTING 40 made in anodized, polished and brushed aluminium in height 40 mm. Available with or without adhesive. Superior aesthetic quality and easy to lay, it is ideal for all public and private environments. Can be used with all types of flooring. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended. Please contact the technical department for informations concerning the skirting bending radius.

SKIRTING 40

ANODIZED AND VARNISHED ALUMINIUM



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H mm	€/lm	€/Pc
BTAA 40A	40	8,69	17,38
BTAA 40	40	7,59	15,18

A at the end of the product code = item with adhesive

VARNISHED SEMIGLOSSY WHITE ALUMINIUM thermo packed
bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H mm	€/lm	€/Pc
BTA 40-01A	40	10,43	20,86
BTA 40-01	40	9,12	18,24

A at the end of the product code = item with adhesive

STONE LINE ALUMINIUM thermo packed
bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H mm	€/lm	€/Pc
BTA 40-SL01A	40	13,59	27,18
BTA 40-SL01	40	11,85	23,70
BTA 40-SL05A	40	13,59	27,18
BTA 40-SL05	40	11,85	23,70
BTA 40-SL08A	40	13,59	27,18
BTA 40-SL08	40	11,85	23,70
BTA 40-SL18A	40	13,59	27,18
BTA 40-SL18	40	11,85	23,70

A at the end of the product code = item with adhesive

VARNISHED SEMIGLOSSY WHITE ALUMINIUM thermo packed
bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H mm	€/lm	€/Pc
BTA 40-EYP01A	40	10,43	20,86
BTA 40-EYP01	40	9,12	18,24
BTA 40-EYP11A	40	10,43	20,86
BTA 40-EYP11	40	9,12	18,24

A at the end of the product code = item with adhesive

BT... 40/40A
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "SKIRTING 40" also choose with or without adhesive.
2. Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints.
3. For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.).
4. Use the corner linking elements-joints and right and left end caps to facilitate laying.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL




COLOURS

KALEIDOS

STONE LINE

EASY LINE



CORNERS, END CAPS AND JOINTS

VARNISHED METAL and VARNISHED PLASTIC

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL ANODIZED - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTAA 40/1	40 x 20	7,09
REZCTAA 40/1	40 x 20	7,09

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL SEMIGLOSSY WHITE - pack. 1Pc

Article	HxL mm	€/Pc
RIZCT01 40/1	40 x 20	14,27
REZCT01 40/1	40 x 20	14,27

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL STONE LINE - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTA 40-SL.../1	40 x 20	18,55
REZCTA 40-SL.../1	40 x 20	18,55

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL EASY LINE - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTA 40-EYP.../1	40 x 20	14,27
REZCTA 40-EYP.../1	40 x 20	14,27

JOINT - EDGE COVER
VARNISHED METAL ANODIZED - pack. 1Pc

Article	H mm	€/Pc
GIZCTAA 40/1	40	7,09

JOINT - EDGE COVER
VARNISHED METAL SEMIGLOSSY WHITE - pack. 1Pc

Article	H mm	€/Pc
GIZCT01 40/1	40	14,27

JOINT - EDGE COVER
VARNISHED METAL STONE LINE - pack. 1Pc

Article	H mm	€/Pc
GIZCTA 40-SL.../1	40	18,55

JOINT - EDGE COVER
VARNISHED METAL EASY LINE - pack. 1Pc

Article	H mm	€/Pc
GIZCTA 40-EYP.../1	40	14,27

END CAPS R / L - EDGE COVER

Article	H mm	€/pack.
TPZCTAA 40/1	40	14,17

END CAPS R / L - EDGE COVER

Article	H mm	€/pack.
TPZCT01 40/1	40	28,54

END CAPS R / L - EDGE COVER

Article	H mm	€/pack.
TPZCTA 40-SL.../1	40	37,09

END CAPS R / L - EDGE COVER

Article	H mm	€/pack.
TPZCTA 40-EYP.../1	40	28,54

METAL EDGE COVER



PLASTIC EDGE COVER



INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED PLASTIC ANODIZED - pack. 1Pc

Article	HxL mm	€/Pc
RICTAA 40/1	40 x 20	4,63
RECTAA 40/1	40 x 20	4,63

JOINT - EDGE COVER
VARNISHED PLASTIC ANODIZED - pack. 1Pc

Article	H mm	€/Pc
GICTAA 40/1	40	4,63

END CAPS R / L - EDGE COVER

Article	H mm	€/pack.
TPCTAA 40/1	40	9,26

SKIRTING 60

POLISHED and Brushed
STAINLESS STEEL AISI 304/1.4301-V2A

SKIRTING 60 made in stainless steel AISI 304/1.4301-V2A in height 60 mm. Available with or without adhesive. Superior aesthetic quality, extremely strong and easy to lay, it is ideal for all public and private environments that require high standards of hygiene and image. Used increasingly more often in contrast combinations with wood, carpeted floors, etc. for an unmistakable hi-tech effect. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.

BTAC/S 60/60A
scale 1:2



POLISHED STAINLESS STEEL AISI 304/1.4301-V2
with protective film - bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm	€/lm	€/Pc
BTAC 60A	60	15,34	30,68
BTAC 60	60	12,50	25,00

A at the end of the product code = item with adhesive



Brushed STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm	€/lm	€/Pc
BTACS 60A	60	18,14	36,28
BTACS 60	60	15,73	31,46

A at the end of the product code = item with adhesive

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

EXAMPLES OF LAYING



LAYING INSTRUCTIONS

1. Choose the "SKIRTING 60" also choose with or without adhesive. 2. Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints. 3. For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.). 4. Use the corner linking elements-joints and right and left end caps to facilitate laying.

COLOURS

AC - Polished stainless steel AISI 304/1.4301-V2A	ACS - Brushed stainless steel AISI 304/1.4301-V2A

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



CORNERS, END CAPS AND JOINTS

STEEL and VARNISHED METAL

EDGE COVER VARNISHED METAL



RIZCT... 60/1
internal corner



REZCT... 60/1
external corner



GIZCT... 60/1
joint



TPZCT... 60/1
end caps

PRE-WELDED



RI... 60/1
internal corner



RE... 60/1
external corner

VARNISHED METAL - EDGE COVER CORNERS

INTERNAL/EXTERNAL CORNER - **EDGE COVER**

VARNISHED METAL POLISHED STEEL EFFECT - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTAC 60/1	60 x 20	14,70
REZCTAC 60/1	60 x 20	14,70

JOINT - **EDGE COVER**

VARNISHED METAL POLISHED STEEL EFFECT - pack. 1Pc

Article	H mm	€/Pc
GIZCTAC 60/1	60	14,27

END CAPS R / L - **EDGE COVER** - VARNISHED METAL POLISHED STEEL EFFECT - pack. 2Pcs (1 R + 1 L)

Article	H mm	€/pack.
TPZCTAC 60/1	60	28,54

INTERNAL/EXTERNAL CORNER - **EDGE COVER**

VARNISHED METAL BRUSHED STAINLESS ST. EFFECT - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTACS 60/1	60 x 20	14,70
REZCTACS 60/1	60 x 20	14,70

JOINT - **EDGE COVER**

VARNISHED METAL BRUSHED STAINLESS ST. EFFECT - pack. 1Pc

Article	H mm	€/Pc
GIZCTACS 60/1	60	14,27

END CAPS R / L - **EDGE COVER** - VARNISHED METAL BRUSHED STAINLESS ST. EFFECT - pack. 2Pcs (1 R + 1 L)

Article	H mm	€/pack.
TPZCTACS 60/1	60	28,54

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS

INTERNAL/EXTERNAL CORNER

FLUSH PRE-WELDED - POLISHED STEEL EFFECT - pack. 1Pc

Article	HxL mm	€/Pc
RIAC 60/1	60 x 50	25,01
REAC 60/1	60 x 50	25,01

INTERNAL/EXTERNAL CORNER

FLUSH PRE-WELDED - BRUSHED STAINLESS STEEL - pack. 1Pc

Article	HxL mm	€/Pc
RIACS 60/1	60 x 50	26,41
REACS 60/1	60 x 50	26,41

SKIRTING 60 made in anodized, polished and brushed aluminium in height 60 mm. Available with or without adhesive. Superior aesthetic quality and easy to lay, it is ideal for all public and private environments. Can be used with all types of flooring. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended. Please contact the technical department for informations concerning the skirting bending radius.

SKIRTING 60

ANODIZED AND VARNISHED ALUMINIUM



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H mm	€/lm	€/Pc
BTAA 60A	60	11,39	22,78
BTAA 60	60	9,32	18,64

A at the end of the product code = Item with adhesive



STONE LINE ALUMINIUM thermo packed
bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H mm	€/lm	€/Pc
BTA 60-SL01A	60	17,76	35,52
BTA 60-SL01	60	14,53	29,06
BTA 60-SL05A	60	17,76	35,52
BTA 60-SL05	60	14,53	29,06
BTA 60-SL08A	60	17,76	35,52
BTA 60-SL08	60	14,53	29,06
BTA 60-SL18A	60	17,76	35,52
BTA 60-SL18	60	14,53	29,06

A at the end of the product code = Item with adhesive

VARNISHED SEMIGLOSSY WHITE ALUMINIUM thermo packed
bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H mm	€/lm	€/Pc
BTA 60-01A	60	13,66	27,32
BTA 60-01	60	11,18	22,36

A at the end of the product code = Item with adhesive

VARNISHED SEMIGLOSSY WHITE ALUMINIUM thermo packed
bar length 2 lm - pack. 40 Pcs - 80 lm

Article	H mm	€/lm	€/Pc
BTA 60-EYP01A	60	13,66	27,32
BTA 60-EYP01	60	11,18	22,36
BTA 60-EYP11A	60	13,66	27,32
BTA 60-EYP11	60	11,18	22,36

A at the end of the product code = Item with adhesive

COLOURS


KALEIDOS

STONE LINE


EASY LINE



BT... 60/60A

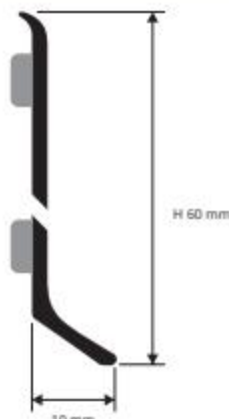

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

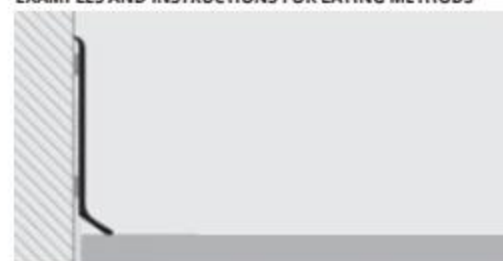

1. Choose the "SKIRTING 60" also choose with or without adhesive.
2. Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints.
3. For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.).
4. Use the corner linking elements-joints and right and left end caps to facilitate laying.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



CORNERS, END CAPS AND JOINTS

VARNISHED METAL and VARNISHED PLASTIC

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL ANODIZED - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTAA 60/1	60 x 20	7,09
REZCTAA 60/1	60 x 20	7,09

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL SEMIGLOSSY WHITE - pack. 1Pc

Article	HxL mm	€/Pc
RIZCT01 60/1	60 x 20	14,27
REZCT01 60/1	60 x 20	14,27

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL STONE LINE - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTA 60-SL.../1	60 x 20	18,55
REZCTA 60-SL.../1	60 x 20	18,55

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL EASY LINE - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTA 60-EYP.../1	60 x 20	14,27
REZCTA 60-EYP.../1	60 x 20	14,27

JOINT - EDGE COVER
VARNISHED METAL ANODIZED - pack. 1Pc

Article	H mm	€/Pc
GIZCTAA 60/1	60	7,09

JOINT - EDGE COVER
VARNISHED METAL SEMIGLOSSY WHITE - pack. 1Pc

Article	H mm	€/Pc
GIZCT01 60/1	60	14,27

JOINT - EDGE COVER
VARNISHED METAL STONE LINE - pack. 1Pc

Article	H mm	€/Pc
GIZCTA 60-SL.../1	60	18,55

JOINT - EDGE COVER
VARNISHED METAL EASY LINE - pack. 1Pc

Article	H mm	€/Pc
GIZCTA 60-EYP.../1	60	14,27

END CAPS R / L - EDGE COVER

Article	H mm	€/pack.
TPZCTAA 60/1	60	14,17

END CAPS R / L - EDGE COVER

Article	H mm	€/pack.
TPZCT01 60/1	60	28,54

END CAPS R / L - EDGE COVER

Article	H mm	€/pack.
TPZCTA 60-SL.../1	60	37,09

END CAPS R / L - EDGE COVER

Article	H mm	€/pack.
TPZCTA 60-EYP.../1	60	28,54

METAL EDGE COVER



PLASTIC EDGE COVER



INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED PLASTIC ANODIZED - pack. 1Pc

Article	HxL mm	€/Pc
RICTAA 60/1	60 x 20	4,63
RECTAA 60/1	60 x 20	4,63

JOINT - EDGE COVER

Article	H mm	€/Pc
GICTAA 60/1	60	4,63


END CAPS R / L - EDGE COVER

Article	H mm	€/pack.
TPCTAA 60/1	60	9,26

SKIRTING 80

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

SKIRTING 80 made in stainless steel AISI 304/1.4301-V2A in height 80 mm. Available with or without adhesive. Superior aesthetic quality, extremely strong and easy to lay, it is ideal for all public and private environments that require high standards of hygiene and image. Used increasingly more often in contrast combinations with wood, carpeted floors, etc. for an unmistakable hi-tech effect. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.

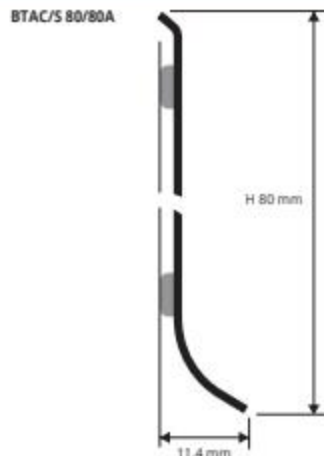

EXAMPLES OF LAYING



POLISHED STAINLESS STEEL AISI 304/1.4301-V2
with protective film - bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm	€/lm	€/Pc
BTAC 80A	80	19,88	39,76
BTAC 80	80	17,76	35,52

A at the end of the product code = item with adhesive



Brushed STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm	€/lm	€/Pc
BTACS 80A	80	22,70	45,40
BTACS 80	80	20,98	41,96


A at the end of the product code = item with adhesive

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

LAYING INSTRUCTIONS

1. Choose the "SKIRTING 80" also choose with or without adhesive. 2. Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints. 3. For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.). 4. Use the corner linking elements-joints and right and left end caps to facilitate laying.

COLOURS

	
AC - Polished stainless steel AISI 304/1.4301-V2A	ACS - Brushed stainless steel AISI 304/1.4301-V2A

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



CORNERS, END CAPS AND JOINTS

STEEL and VARNISHED METAL

EDGE COVER VARNISHED METAL



RIZCT... 80/1
internal corner



REZCT... 80/1
external corner



GIZCT... 80/1
joint



TPZCT... 80/1
end caps

PRE-WELDED



RI... 80/1
internal corner



RE... 80/1
external corner

VARNISHED METAL - EDGE COVER CORNERS

INTERNAL/EXTERNAL CORNER - EDGE COVER

VARNISHED METAL POLISHED STEEL EFFECT - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTAC 80/1	80 x 20	14,70
REZCTAC 80/1	80 x 20	14,70

JOINT - EDGE COVER

VARNISHED METAL POLISHED STEEL EFFECT - pack. 1Pc

Article	H mm	€/Pc
GIZCTAC 80/1	80	14,27

END CAPS R / L - EDGE COVER - VARNISHED METAL POLISHED STEEL EFFECT - pack. 2Pcs (1 R + 1 L)

Article	H mm	€/pack.
TPZCTAC 80/1	80	28,54

INTERNAL/EXTERNAL CORNER - EDGE COVER

VARNISHED METAL BRUSHED STAINLESS ST. EFFECT - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTACS 80/1	80 x 20	14,70
REZCTACS 80/1	80 x 20	14,70

JOINT - EDGE COVER

VARNISHED METAL BRUSHED STAINLESS ST. EFFECT - pack. 1Pc

Article	H mm	€/Pc
GIZCTACS 80/1	80	14,27

END CAPS R / L - EDGE COVER - VARNISHED METAL BRUSHED STAINLESS ST. EFFECT - pack. 2Pcs (1 R + 1 L)

Article	H mm	€/pack.
TPZCTACS 80/1	80	28,54

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS

INTERNAL/EXTERNAL CORNER

FLUSH PRE-WELDED - POLISHED STEEL EFFECT - pack. 1Pc

Article	HxL mm	€/Pc
RIAC 80/1	80 x 50	27,97
REAC 80/1	80 x 50	27,97

INTERNAL/EXTERNAL CORNER

FLUSH PRE-WELDED - BRUSHED STAINLESS STEEL - pack. 1Pc

Article	HxL mm	€/Pc
RIACS 80/1	80 x 50	29,36
REACS 80/1	80 x 50	29,36

SKIRTING 80 made in anodized, polished and brushed aluminium in height 80 mm. Available with or without adhesive. Superior aesthetic quality and easy to lay, it is ideal for all public and private environments. Can be used with all types of flooring. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended. Please contact the technical department for informations concerning the skirting bending radius.

SKIRTING 80

ANODIZED AND VARNISHED ALUMINIUM



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 30 Pcs - 60 lm

Article	H mm	€/lm	€/Pc
BTAA 80A	80	14,02	28,04
BTAA 80	80	11,87	23,74

A at the end of the product code = item with adhesive

VARNISHED SEMIGLOSSY WHITE ALUMINIUM thermo packed
bar length 2 lm - pack. 30 Pcs - 60 lm

Article	H mm	€/lm	€/Pc
BTA 80-01A	80	16,82	33,64
BTA 80-01	80	14,27	28,54

A at the end of the product code = item with adhesive

STONE LINE ALUMINIUM thermo packed
bar length 2 lm - pack. 30 Pcs - 60 lm

Article	H mm	€/lm	€/Pc
BTA 80-SL01A	80	21,33	42,66
BTA 80-SL01	80	18,55	37,1
BTA 80-SL05A	80	21,33	42,66
BTA 80-SL05	80	18,55	37,1
BTA 80-SL08A	80	21,33	42,66
BTA 80-SL08	80	18,55	37,1
BTA 80-SL18A	80	21,33	42,66
BTA 80-SL18	80	18,55	37,1


A at the end of the product code = item with adhesive

VARNISHED SEMIGLOSSY WHITE ALUMINIUM thermo packed
bar length 2 lm - pack. 30 Pcs - 60 lm

Article	H mm	€/lm	€/Pc
BTA 80-EYP01A	80	16,82	33,64
BTA 80-EYP01	80	14,27	28,54
BTA 80-EYP11A	80	16,82	33,64
BTA 80-EYP11	80	14,27	28,54

A at the end of the product code = item with adhesive

BT... 80/80A

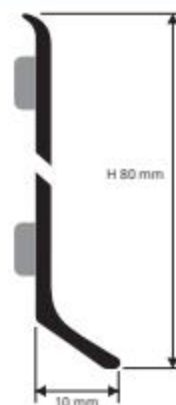

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "SKIRTING 80" also choose with or without adhesive.
2. Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints.
3. For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.).
4. Use the corner linking elements-joints and right and left end caps to facilitate laying.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL




COLOURS

KALEIDOS

STONE LINE

EASY LINE



CORNERS, END CAPS AND JOINTS

VARNISHED METAL and VARNISHED PLASTIC

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL ANODIZED - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTAA 80/1	80 x 20	7,09
REZCTAA 80/1	80 x 20	7,09

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL SEMIGLOSSY WHITE - pack. 1Pc

Article	HxL mm	€/Pc
RIZCT01 80/1	80 x 20	14,27
REZCT01 80/1	80 x 20	14,27

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL STONE LINE - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTA 80-SL.../1	80 x 20	18,55
REZCTA 80-SL.../1	80 x 20	18,55

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL EASY LINE - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTA 80-EYP.../1	80 x 20	14,27
REZCTA 80-EYP.../1	80 x 20	14,27

JOINT - EDGE COVER
VARNISHED METAL ANODIZED - pack. 1Pc

Article	H mm	€/Pc
GIZCTAA 80/1	80	7,09

JOINT - EDGE COVER
VARNISHED METAL SEMIGLOSSY WHITE - pack. 1Pc

Article	H mm	€/Pc
GIZCT01 80/1	80	14,27

JOINT - EDGE COVER
VARNISHED METAL STONE LINE - pack. 1Pc

Article	H mm	€/Pc
GIZCTA 80-SL.../1	80	18,55

JOINT - EDGE COVER
VARNISHED METAL EASY LINE - pack. 1Pc

Article	H mm	€/Pc
GIZCTA 80-EYP.../1	80	14,27

END CAPS R / L - EDGE COVER

Article	H mm	€/pack.
TPZCTAA 80/1	80	14,17

END CAPS R / L - EDGE COVER
VARNISHED METAL SEMIGLOSSY WHITE - pack. 2Pcs (1R+1L)

Article	H mm	€/pack.
TPZCT01 80/1	80	28,54

END CAPS R / L - EDGE COVER
VARNISHED METAL STONE LINE - pack. 2Pcs (1R+1L)

Article	H mm	€/pack.
TPZCTA 80-SL.../1	80	37,09

END CAPS R / L - EDGE COVER
VARNISHED METAL EASY LINE - pack. 2Pcs (1R+1L)

Article	H mm	€/pack.
TPZCTA 80-EYP.../1	80	28,54

METAL EDGE COVER



PLASTIC EDGE COVER



INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED PLASTIC ANODIZED - pack. 1Pc

Article	HxL mm	€/Pc
RICTAA 80/1	80 x 20	4,63
RECTAA 80/1	80 x 20	4,63

JOINT - EDGE COVER

Article	H mm	€/Pc
GICTAA 80/1	80	4,63


END CAPS R / L - EDGE COVER

Article	H mm	€/pack.
TPCTAA 80/	80	9,26

SKIRTING 100 SKIRTING 150

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

SKIRTING 100 and **SKIRTING 150** made in stainless steel AISI 304/1.4301-V2A in height 100 and 150 mm. Available with or without adhesive. Superior aesthetic quality, extremely strong and easy to lay, it is ideal for all public and private environments that require high standards of hygiene and image. Used increasingly more often in contrast combinations with wood, carpeted floors, etc. for an unmistakable hi-tech effect. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.

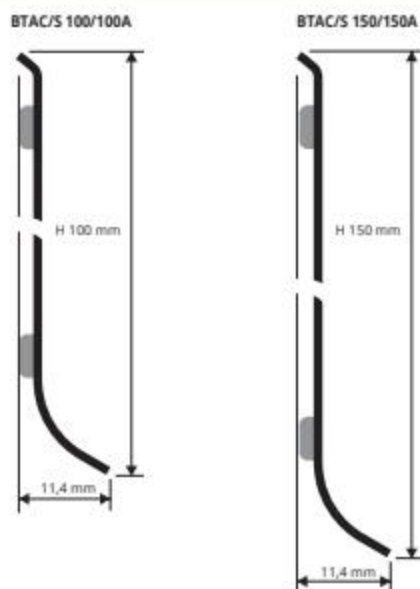

POLISHED STAINLESS STEEL AISI 304/1.4301-V2 - H 100
with protective film - bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm	€/lm	€/Pc
BTAC 100A	100	22,10	44,20
BTAC 100	100	19,88	39,76

*"A" at the end of the product code = item with adhesive

Brushed STAINLESS STEEL AISI 304/1.4301-V2A - H 100
with protective film - bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm	€/lm	€/Pc
BTACS 100A	100	23,81	47,62
BTACS 100	100	21,97	43,94

*"A" at the end of the product code = item with adhesive

POLISHED STAINLESS STEEL AISI 304/1.4301-V2 - H 150
with protective film - bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm	€/lm	€/Pc
BTAC 150A	150	31,39	62,78
BTAC 150	150	29,46	58,92

*"A" at the end of the product code = item with adhesive

Brushed STAINLESS STEEL AISI 304/1.4301-V2A - H 150
with protective film - bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm	€/lm	€/Pc
BTACS 150A	150	33,31	66,62
BTACS 150	150	31,00	62,00

*"A" at the end of the product code = item with adhesive

EXAMPLES OF LAYING



LAYING INSTRUCTIONS

1. Choose the "SKIRTING 100-150" also choose with or without adhesive. 2. Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints. 3. For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.). 4. Use the corner linking elements-joints and right and left end caps to facilitate laying.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



COLOURS

AC - Polished stainless steel AISI 304/1.4301-V2A	ACS - Brushed stainless steel AISI 304/1.4301-V2A
--	--

CORNERS, END CAPS AND JOINTS

STEEL and VARNISHED METAL

EDGE COVER VARNISHED METAL



RIZCT... 100/1
internal corner



REZCT... 100/1
external corner



GIZCT... 100/1
joint



TPZCT... 100/1
end caps

STEEL PRE-WELDED

RI... 100/1 / 150/1
internal corner

RE... 100/1 / 150/1
external corner



VARNISHED METAL - EDGE COVER CORNERS - H 100

INTERNAL/EXTERNAL CORNER - EDGE COVER

VARNISHED METAL POLISHED STEEL EFFECT - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTAC 100/1	100 x 20	14,70
REZCTAC 100/1	100 x 20	14,70

JOINT - EDGE COVER

VARNISHED METAL POLISHED STEEL EFFECT - pack. 1Pc

Article	H mm	€/Pc
GIZCTAC 100/1	100	14,27

END CAPS R / L - EDGE COVER - VARNISHED METAL POLISHED STEEL EFFECT - pack. 2Pcs (1 R + 1 L)

Article	H mm	€/pack.
TPZCTAC 100/1	100	28,54

INTERNAL/EXTERNAL CORNER - EDGE COVER

VARNISHED METAL BRUSHED STAINLESS ST. EFFECT - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTACS 100/1	100 x 20	14,70
REZCTACS 100/1	100 x 20	14,70

JOINT - EDGE COVER

VARNISHED METAL BRUSHED STAINLESS ST. EFFECT - pack. 1Pc

Article	H mm	€/Pc
GIZCTACS 100/1	100	14,27

END CAPS R / L - EDGE COVER - VARNISHED METAL BRUSHED STAINLESS ST. EFFECT - pack. 2Pcs (1 R + 1 L)

Article	H mm	€/pack.
TPZCTACS 100/1	100	28,54

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS - H 100

INTERNAL/EXTERNAL CORNER

FLUSH PRE-WELDED - POLISHED STEEL EFFECT - pack. 1Pc

Article	HxL mm	€/Pc
RIAC 100/1	100 x 50	30,90
REAC 100/1	100 x 50	30,90

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS - H 150

INTERNAL/EXTERNAL CORNER

FLUSH PRE-WELDED - POLISHED STEEL EFFECT - pack. 1Pc

Article	HxL mm	€/Pc
RIAC 150/1	150 x 50	46,60
REAC 150/1	150 x 50	46,60

INTERNAL/EXTERNAL CORNER

FLUSH PRE-WELDED - BRUSHED STAINLESS STEEL - pack. 1Pc

Article	HxL mm	€/Pc
RIACS 100/1	100 x 50	32,30
REACS 100/1	100 x 50	32,30

INTERNAL/EXTERNAL CORNER

FLUSH PRE-WELDED - BRUSHED STAINLESS STEEL - pack. 1Pc

Article	HxL mm	€/Pc
RIACS 150/1	150 x 50	48,13
REACS 150/1	150 x 50	48,13

SKIRTING 100 made in anodized, polished and brushed aluminium in height 100 mm. Available with or without adhesive. Superior aesthetic quality and easy to lay, it is ideal for all public and private environments. Can be used with all types of flooring.
In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.
Please contact the technical department for informations concerning the skirting bending radius.

SKIRTING 100

ANODIZED AND VARNISHED ALUMINIUM



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm	€/lm	€/Pc
BTAA 100A	100	18,10	36,20
BTAA 100	100	15,69	31,38

*"A" at the end of the product code = item with adhesive



STONE LINE ALUMINIUM thermo packed
bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm	€/lm	€/Pc
BTA 100-SL01A	100	28,20	56,4
BTA 100-SL01	100	24,46	48,92
BTA 100-SL05A	100	28,20	56,4
BTA 100-SL05	100	24,46	48,92
BTA 100-SL08A	100	28,20	56,4
BTA 100-SL08	100	24,46	48,92
BTA 100-SL18A	100	28,20	56,4
BTA 100-SL18	100	24,46	48,92

*"A" at the end of the product code = item with adhesive

VARNISHED SEMIGLOSSY WHITE ALUMINIUM thermo packed
bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm	€/lm	€/Pc
BTA 100-01A	100	21,70	43,40
BTA 100-01	100	18,82	37,64

*"A" at the end of the product code = item with adhesive

VARNISHED SEMIGLOSSY WHITE ALUMINIUM thermo packed
bar length 2 lm - pack. 20 Pcs - 40 lm

Article	H mm	€/lm	€/Pc
BTA 100-EYP01A	100	21,70	43,4
BTA 100-EYP01	100	18,82	37,64
BTA 100-EYP11A	100	21,70	43,4
BTA 100-EYP11	100	18,82	37,64

*"A" at the end of the product code = item with adhesive

COLOURS


KALEICOS

STONE LINE


EASY LINE



BT... 100/100A

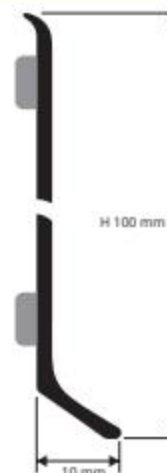

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

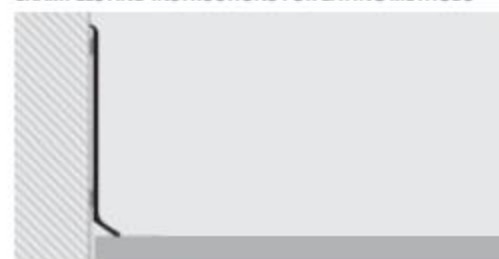

1. Choose the "SKIRTING 80" also choose with or without adhesive.
2. Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints.
3. For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.).
4. Use the corner linking elements-joints and right and left end caps to facilitate laying.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



CORNERS, END CAPS AND JOINTS

VARNISHED METAL and VARNISHED PLASTIC

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL ANODIZED - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTAA 100/1	100 x 20	7,09
REZCTAA 100/1	100 x 20	7,09

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL SEMIGLOSSY WHITE - pack. 1Pc

Article	HxL mm	€/Pc
RIZCT01 100/1	100 x 20	14,27
REZCT01 100/1	100 x 20	14,27

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL STONE LINE - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTA 100-SL.../1	100 x 20	18,55
REZCTA 100-SL.../1	100 x 20	18,55

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL EASY LINE - pack. 1Pc

Article	HxL mm	€/Pc
RIZCTA 100-EYP.../1	100 x 20	14,27
REZCTA 100-EYP.../1	100 x 20	14,27

JOINT - EDGE COVER

VARNISHED METAL ANODIZED - pack. 1Pc

Article	H mm	€/Pc
GIZCTAA 100/1	100	7,09

JOINT - EDGE COVER

VARNISHED METAL SEMIGLOSSY WHITE - pack. 1Pc

Article	H mm	€/Pc
GIZCT01 100/1	100	14,27

JOINT - EDGE COVER

VARNISHED METAL STONE LINE - pack. 1Pc

Article	H mm	€/Pc
GIZCTA 100-SL.../1	100	18,55

JOINT - EDGE COVER

VARNISHED METAL EASY LINE - pack. 1Pc

Article	H mm	€/Pc
GIZCTA 100-EYP.../1	100	14,27

END CAPS R / L - EDGE COVER

VARNISHED METAL ANODIZED - pack. 2Pcs (1R+1L)

Article	H mm	€/pack.
TPZCTAA 100/1	100	14,17

END CAPS R / L - EDGE COVER

VARNISHED METAL SEMIGLOSSY WHITE - pack. 2Pcs (1R+1L)

Article	H mm	€/pack.
TPZCT01 100/1	100	28,54

END CAPS R / L - EDGE COVER

VARNISHED METAL STONE LINE - pack. 2Pcs (1R+1L)

Article	H mm	€/pack.
TPZCTA 100-SL.../1	100	37,09

END CAPS R / L - EDGE COVER

VARNISHED METAL EASY LINE - pack. 2Pcs (1R+1L)

Article	H mm	€/pack.
TPZCTA 100-EYP.../1	100	28,54

METAL EDGE COVER



PLASTIC EDGE COVER



INTERNAL/EXTERNAL CORNER - EDGE COVER

VARNISHED PLASTIC ANODIZED - pack. 1Pc

Article	HxL mm	€/Pc
RICTAA 100/1	100 x 20	4,63
RECTAA 100/1	100 x 20	4,63

JOINT - EDGE COVER

VARNISHED PLASTIC ANODIZED - pack. 1Pc

Article	H mm	€/Pc
GICTAA 100/1	100	4,63

END CAPS R / L - EDGE COVER

VARNISHED PLASTIC ANODIZED - pack. 2Pcs (1R+1L)


Article	H mm	€/pack.
TPCTAA 100/1	100	9,26

SKIRTING 6014

FOAMED VINYL RESIN

SKIRTING 6014 is a very light, stable and planar expanded vinyl resin profile, available in various colours. The profile is equipped with a flexible flange supporting the floor to ensure cleanliness and hygiene along the walls. The profile has good chemical resistance and can be fixed to the wall with PROBAND FIX, screws or nails. **SKIRTING 6014**, in expanded vinyl resin is suitable for any indoor floor.

BTEPR...

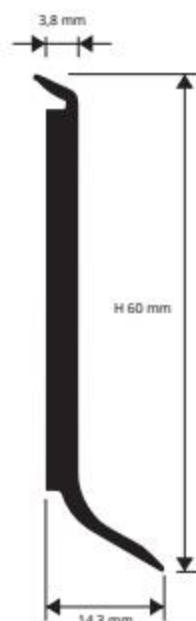

FOAMED VINYL RESIN

bar length 2,2 lm - pack 25 Pcs - 55 lm

Article	H mm	€/lm	€/Pc
BTEPRB 6014	60	3,30	7,26
BTEPRN 6014	60	3,30	7,26
BTEPRGS 6014	60	3,30	7,26
BTEPRGC 6014	60	3,30	7,26

ARTICLES NOT FOR SALE SINGLY

COLOURS

B - White	GC - Light grey	GS - Dark grey
N - Black		



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "SKIRTING 6014 / 8014" according to the desired color. 2. Cut "SKIRTING 6014 / 8014" to the desired length. Laying with PROBAND FIX. 3. Carefully clean the substrate on which the profile will be laid from oil residues, grease and dirt in general. 4. On a dry surface, apply the PROBAND FIX. 5. Press the profile against the wall with proper pressure. 6. Laying with screws or nails.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



SKIRTING 8014

FOAMED VINYL RESIN

SKIRTING 8014 is a very light, stable and planar expanded vinyl resin profile, available in various colours. The profile is equipped with a flexible flange supporting the floor to ensure cleanliness and hygiene along the walls. The profile has good chemical resistance and can be fixed to the wall with PROBAND FIX, screws or nails. **SKIRTING 8014**, in expanded vinyl resin is suitable for any indoor floor.

BTEPR...



FOAMED VINYL RESIN

bar length 2,2 lm - pack 25 Pcs - 55 lm

Article	H mm	€/lm	€/Pc
BTEPRB 8014	80	3,71	8,16
BTEPRN 8014	80	3,71	8,16
BTEPRGS 8014	80	3,71	8,16
BTEPRGC 8014	80	3,71	8,16

ARTICLES NOT FOR SALE SINGLY

COLOURS

B - White	GC - Light grey	GS - Dark grey
N - Black		



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "SKIRTING 6014 / 8014" according to the desired color. 2. Cut "SKIRTING 6014 / 8014" to the desired length. Laying with PROBAND FIX. 3. Carefully clean the substrate on which the profile will be laid from oil residues, grease and dirt in general. 4. On a dry surface, apply the PROBAND FIX. 5. Press the profile against the wall with proper pressure. 6. Laying with screws or nails.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



NEWS

COVERSKIRTING ROUND is a vinyl resin profile coated with a vinyl resin film available in white, black, silver and different wood finishes. Thanks to its special section it can be used to cover ceramic skirting with a maximum height of 75 mm. The profile has good chemical resistance and can be fixed with PROBAND FIX. **COVERSKIRTING ROUND** in vinyl resin coated with vinyl resin film is suitable for any indoor environment.

COVERSKIRTING ROUND

VINYL RESIN COATED



VINYL RESIN COATED

bar length 2,5 ml - pack 15 pz

Article	H mm	€/ml	€/Pc
BTCCKRB 90	90	7,16	17,90

VINYL RESIN COATED

bar length 2,5 ml - pack 15 pz

Article	H mm	€/ml	€/Pc
BTCCKR... 90	90	7,36	18,40


COLOURS

B - White	N - Black	AA - Alu. Anod. silver
29W	30W	34W

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "COVERSKIRTING ROUND" according to the desired color.
2. Cut "COVERSKIRTING ROUND" to the desired length.
3. Carefully clean the support on which the profile will be laid from residues of oils, grease and dirt in general.
4. Apply the Proband Fix to the profile grooves.
5. Press the profile against the surface to be covered by applying proper pressure.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL

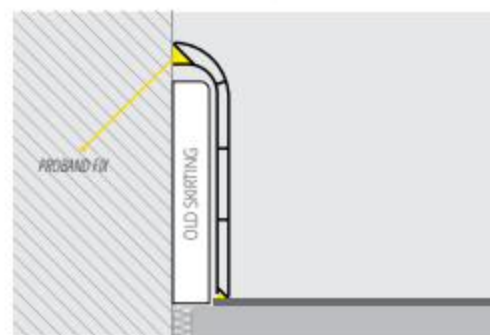

NEWS

COVERSKIRTING SQUARE is a vinyl resin profile coated with a vinyl resin film available in white, black, silver and different wood finishes. Thanks to its special section it can be used to cover ceramic skirting with a maximum height of 75 mm. The profile has good chemical resistance and can be fixed with PROBAND FIX. **COVERSKIRTING SQUARE** in vinyl resin coated with vinyl resin film is suitable for any indoor environment.

COVERSKIRTING SQUARE

VINYL RESIN COATED



VINYL RESIN COATED

bar length 2,5 ml - pack 15 pz

Article	H mm	€/ml	€/Pc
BTCCKSQB 90	90	7,16	17,90

VINYL RESIN COATED

bar length 2,5 ml - pack 15 pz

Article	H mm	€/ml	€/Pc
BTCCKSQ... 90	90	7,36	18,40


COLOURS

B - White	N - Black	AA - Alu. Anod. silver
29W	30W	34W

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "COVERSKIRTING SQUARE" according to the desired color.
2. Cut "COVERSKIRTING SQUARE" to the desired length.
3. Carefully clean the support on which the profile will be laid from residues of oils, grease and dirt in general.
4. Apply the Proband Fix to the profile grooves.
5. Press the profile against the surface to be covered by applying proper pressure.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL

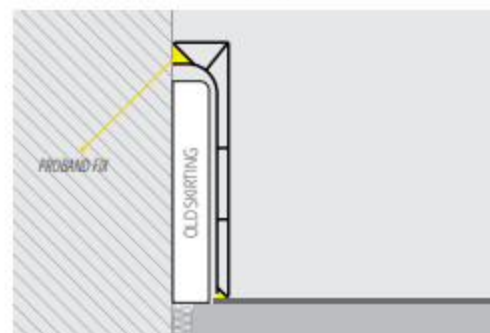


SKIRTING
BOARDS

SKIRTING 7016

FOAMED VINYL RESIN

SKIRTING 7016 is a vinyl resin foam profile with a height of 70 mm. available wooden finishes and finishes in solid colour that could be matched with the PROINSERT SYSTEM's profiles. The profile, suitable like skirting for floating and glued wood floor, laminate and LVT, could be laid with suitable adhesive, nails, screws or using the pre-punched support fixed to the wall with screws every 57 cm. Its special section, that allows to cover a 16 mm perimetral joint, and wide range of finishes make it a very requested, elegant and economic skirting profile.

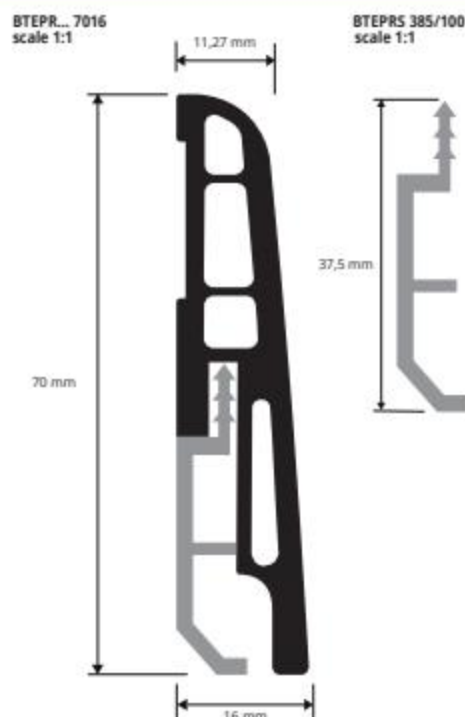

FOAMED VINYL RESIN (wood finishes - black - white and silver)
Length = 2,5 m - Pack 20 pcs - 50 lm

Article	H mm	€/lm	€/pc
BTEPR... 7016	70	4,78	11,95



SUPPORT / FIXING CLIP - PLASTIC
support Length 5 cm

Article	H mm	€/pack.
BTEPRS 385/100	37,5	13,06

Order the SUPPORT and choose the SKIRTING in the desired finish.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL




IN/EXTERNAL CORNERS and END CAPS KIT
(wood finishes - black - white and silver)

Article	H mm	€/KIT
KIT BTEPR ...7016I	70	12,04
KIT BTEPR ...7016E	70	12,04

KIT BTEPR...7016I
INTERNAL CORNER KIT



KIT BTEPR...7016E
EXTERNAL CORNER KIT

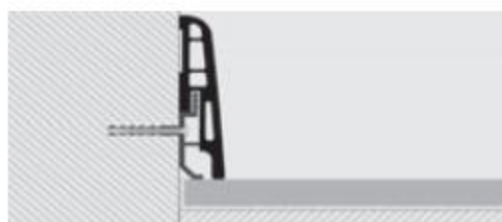


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "Skirting 7016" in the desired finish. 2. Fix the pre-punched support to the wall with screws every 50 cm. 3. Attach the profile to the support applying low pressure. 4. Alternatively fix the profile using a suitable fast adhesive, nails or screws

COLOURS

(For a precise assessment of colours request the wood finishes sample range)

04W - Dark beech	05W - Light oak	18W - Light Zerbano	29W - White oak	30W - Gray oak	31W - Victoria oak	33W - Sawn oak	34W - Havana oak	37W - Carvi oak
41W - Ice oak	42W - Grace oak							
						B - White	N - Black	AA - Silver

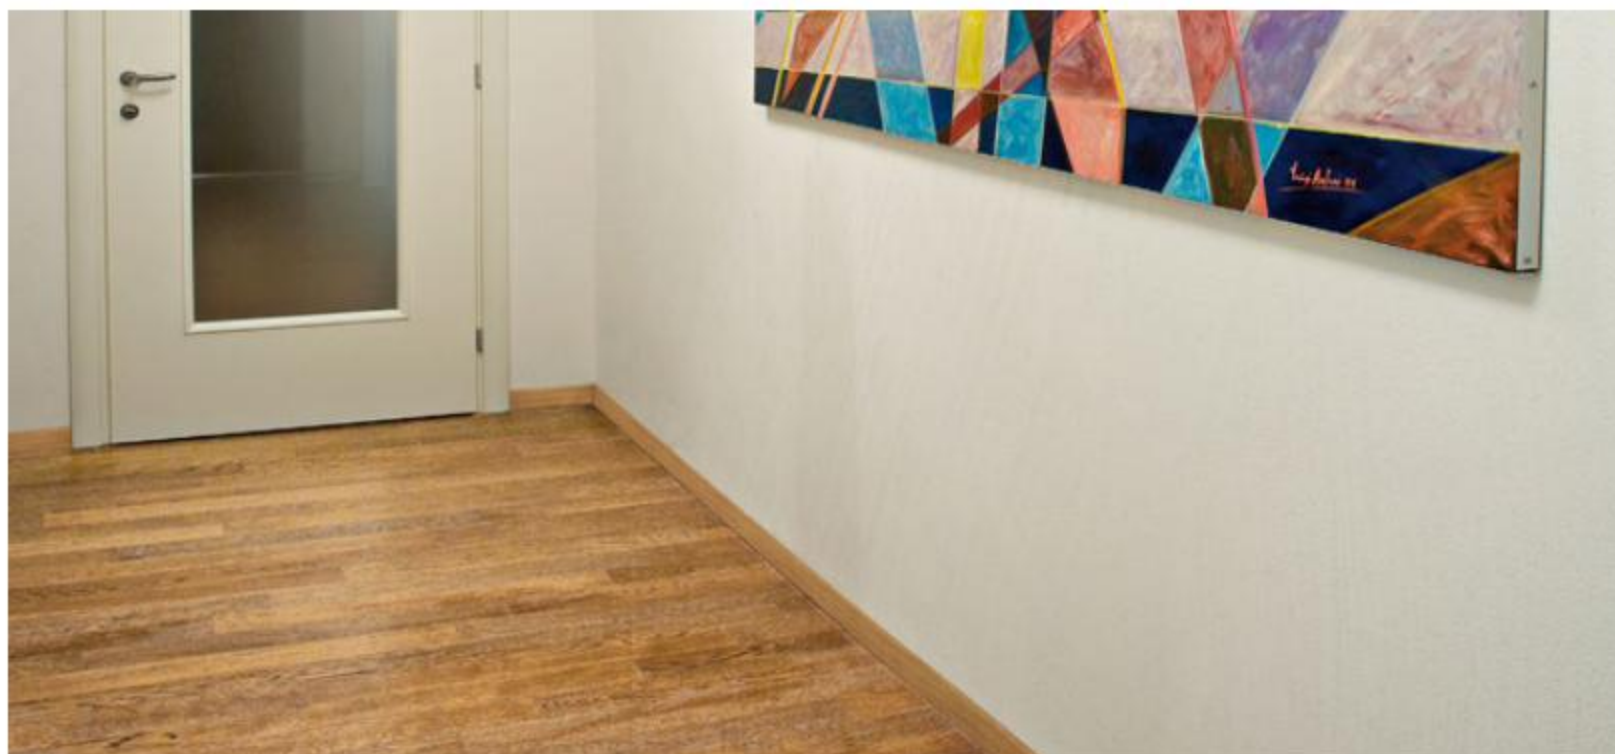

SKIRTING 7011 is a vinyl resin profile with a height of 70 mm x 10,5 mm, available in wooden finishes and finishes standard colours that could be matched with the PROINSERT SYSTEM's profiles. Suitable as Basebord for floating and glued wood floor, laminate and LVT, could be laid with suitable adhesive, or else with nails.

SKIRTING 7011

VINYL RESIN



FOAMED VINYL RESIN (wood finishes - black - white and silver)
Length = 2,5 m - Pack 20 pcs - 50 lm

Article	H mm	€/lm	€/pc
BTEPR... 7011	70	4,56	11,40

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL




IN/EXTERNAL CORNERS and END CAPS KIT
(wood finishes - black - white and silver)

Article	H mm	€/KIT
KIT BTEPR ...7011I	70	10,69
KIT BTEPR ...7011E	70	10,69

KIT BTEPR...7011I
INTERNAL CORNER KIT



KIT BTEPR...7011E
EXTERNAL CORNER KIT

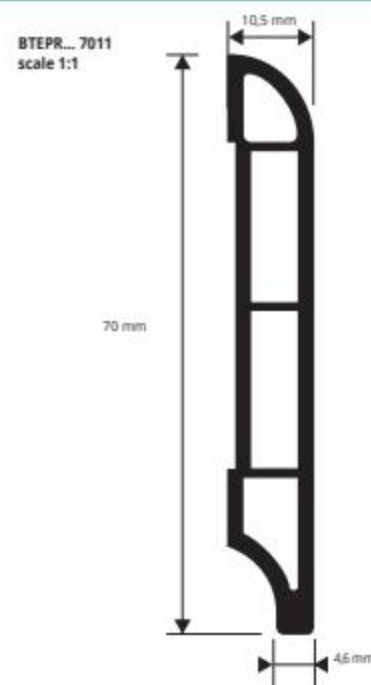

COLOURS

(For a precise assessment of colours request the wood finishes sample range)

04W - Dark beech	05W - Light oak	21W - Powder Oak	29W - White oak	30W - Gray oak	31W - Victoria oak	34W - Havana oak	37W - Camel oak	41W - Ice oak
42W - Grace oak	44W - Honey oak	48W - Cork oak	49W - Sand oak	53W	54W	62W	65W - Tripoli	66W
71W	74W	75W - Leopard	85W					

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "Skirting 7011" in the required the colour.
2. Lay the "Skirting 7011" using quick-setting suitable adhesive for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with nails.

SKIRTING 40 is a vinyl resin profile with a height of 40 mm x 10 mm, available in wooden finishes and finishes standard colours that could be matched with the PROINSERT SYSTEM's profiles. Suitable as Basebord for floating and glued wood floor, laminate and LVT, could be laid with suitable adhesive, or else with nails.

SKIRTING 40

VINYL RESIN



FOAMED VINYL RESIN (wood finishes - black - white and silver)
Length = 2,4 m - Pack 20 PC - 48 ml

Article	H mm	€/lm	€/pc
BTEPR... 4010	40	4,56	10,94

Available in the finishes: 29W - 30W - 34W - B - N - AA.
The code of the selected colour must be added to the article code.
E.g.: BTEPR... 4010 (chosen finish Havana oak) BTEPR34W 4010

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL




IN/EXTERNAL CORNERS and END CAPS KIT
(wood finishes - black - white and silver)

Article	H mm	€/KIT
KIT BTEPR ...4010I	40	6,86
KIT BTEPR ...4010E	40	6,86


KIT BTEPR...4010I
INTERNAL CORNER KIT



KIT BTEPR...4010E
EXTERNAL CORNER KIT

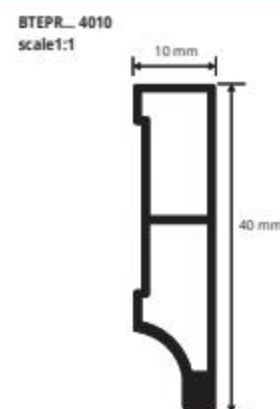

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

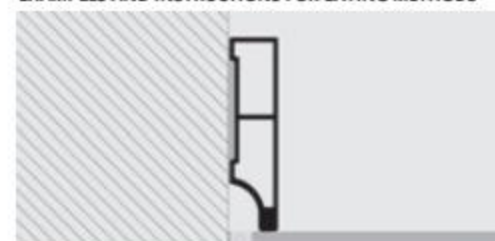

1. Choose the "Skirting 40" in the required the colour.
2. Lay the "Skirting 40" using quick-setting suitable adhesive for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with nails.

COLOURS

(For a precise assessment of colours request the wood finishes sample range)


29W	30W	34W	B - White	N - Black	AA - Silver
-----	-----	-----	-----------	-----------	-------------

SKIRTING 60 SKIRTING 120


NON-TOXIC FLEXIBLE VINYL RESIN
IN 6 COLOURS

PVC FLEXIBLE SKIRTING 60/120 height 60 mm and 120 mm, is a very strong profile ideal for easily achieving special, attractive, superior finishes. Installation recommended with glue or silicone. Easy to install, the shaped edges ensure perfect adhesion to the surface. The projecting rounded flange covers the terminal expansion joint.

BTPV... 60
scale 1:1

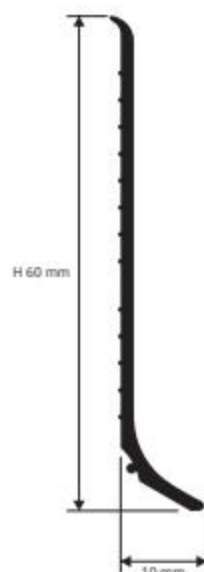

BTPV... 120

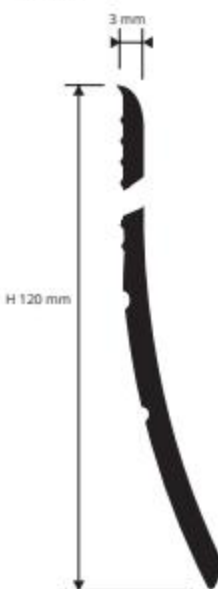

ATTENTION: IN ORDER TO USE, LAY AND FIX PROPERLY THIS PRODUCT PLEASE LOOK AT OUR WEBSITE OR APP LAYING / FIXING VIDEO FOR CORRECT INSTALLATION.




NON-TOXIC FLEXIBLE VINYL RESIN
rolls length 50 lm

Article	H mm	€/lm	€/roll
BTPV... 60	60	2,20	110,00
BTPV... 60A	60	3,69	184,50
BTPV... 120	120	5,24	262,00
BTPV... 120A	120	8,35	417,50

A at the end of the product code = Item with adhesive

Available in the colours: B - GC - GS - T - M - N.
The code of the selected colour must be added to the article code.
E.g.: BTPV... 60 (chosen finish light gray) BTPVGC 60.
BTPV... 60A (chosen finish light gray) BTPVGC 60A.

As regards the items with adhesive, the adhesive roll is provided separately (50 lm)

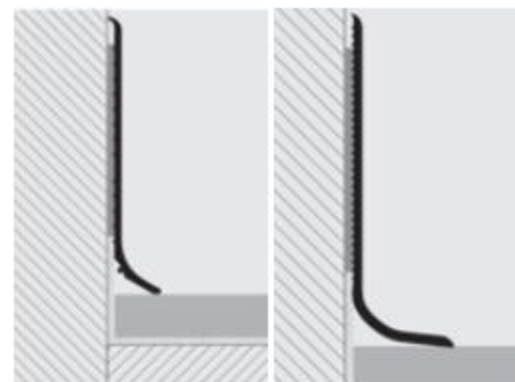

LAYING INSTRUCTIONS

1. Choose the colour of the "SKIRTING 60/120" board, indicating whether you want it with or without a self-adhesive backing. 2. Cut the "SKIRTING 60/120" to length, taking into account the width of the internal and external connections. 3. Self-adhesive skirting is recommended only for surfaces that are perfectly smooth, non-oily and non-porous. On plaster and mortar surfaces, use a non-adhesive version and apply the skirting using quick-setting acrylic silicone suitable for gluing aluminium to mortar, plaster, etc.

Adhesive version

4. When the surface is dry, apply the double-sided adhesive to the wall and press the profile into position with the correct pressure.

Non-adhesive version

4. On a dry surface apply suitable adhesive and press the profile in position with the correct pressure.

COLOURS


B - White	GC - Light gray	GS - Dark gray	T - Dark brown	M - Brown	N - Black
-----------	-----------------	----------------	----------------	-----------	-----------

SKIRTING 62F

NON-TOXIC FLEXIBLE VINYL RESIN
ADHESIVE

SKIRTING 62F is a new 62 mm skirting board made of non-toxic, flexible vinyl resin. This profile is very resistant and particularly suited for providing highly aesthetic perimeter skirting of excellent quality at reasonable prices. It differs from the BTPV... 60 skirting board in that it is provided with a bottom flange that allows it to be placed perpendicularly (90°) to the wall/lining and welded to PVC floors. In addition, the horizontal flange covers the floor's perimeter expansion joint. We recommend applying the skirting using glue/adhesive/Bostik/mastic. Alternatively, you can choose the self-adhesive version for quick, effortless installation.

BTPF... 62 / BTPF... 62A
scale 1:1

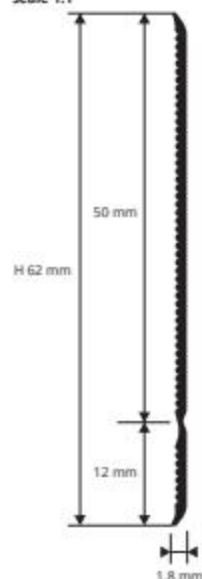

FLEXIBLE VINYL RESIN
rolls length 50 lm

Article	H mm	€/lm	€/roll
BTPF... 62	62	2,08	104,00
BTPF... 62A	62	3,52	176,00

A at the end of the product code = Item with adhesive

Available in the colours: B - GC - GS - T - M - N.
The code of the selected colour must be added to the article code.
E.g.: BTPF... 62 (chosen finish light gray) BTPF62 62.
BTPF... 62A (chosen finish light gray) BTPF62 62A.

As regards the items with adhesive, the adhesive roll is provided separately (50 lm)

COLOURS

B - White	GC - Light gray	GS - Dark gray
N - Black		

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the colour of the "SKIRTING 62F" board, indicating whether you want it with or without a self-adhesive backing. 2. Cut the "SKIRTING 62F" to length, taking into account the width of the internal and external connections. 3. Self-adhesive skirting is recommended only for surfaces that are perfectly smooth, non-oily and non-porous. On plaster and mortar surfaces, use a non-adhesive version and apply the skirting using quick-setting acrylic silicone suitable for gluing aluminium to mortar, plaster, etc.

Adhesive version

4. When the surface is dry, apply the double-sided adhesive to the wall and press the profile into position with the correct pressure.

Non-adhesive version

4. On a dry surface apply suitable adhesive and press the profile in position with the correct pressure.

ATTENTION:
IN ORDER TO USE, LAY AND FIX PROPERLY THIS PRODUCT PLEASE LOOK AT OUR WEBSITE OR APP LAYING / FIXING VIDEO FOR CORRECT INSTALLATION



SKIRTING in PVC foam height 70 mm in 4 semi-matt colours and 8 wood finishes to be matched with the PROINSERT SYSTEM profiles for floating laminated wood floors and traditional parquet floors. Laying is done by gluing (acetic silicone - acrylic-mastic) or using screws or nails. Attractive, strong, hardwearing and economic, it is easy to lay and ideal for many public premises (hospitals, schools, gymnasiums, rest homes and creative areas) and private environments.

SKIRTING

EXPANDED VINYL RESIN



EXPANDED RIGID VINYL RESIN (black - light and dark grey - white)
bar length 2 lm - pack. 60 Pcs - 120 lm

Article	H mm	€/lm	€/Pc	€/Pack.
BTPR... 70	70	1,31	2,62	157,20

EXPANDED RIGID VINYL RESIN (wood finishes)
bar length 2 lm - pack. 60 Pcs - 120 lm

Article	H mm	€/lm	€/Pc	€/Pack.
BTPR... 70	70	1,37	2,74	164,40

Available in the wood finishes: B - GC - GS - N - 04W - 05W - 06W - 07W - 08W - 09W - 10W - M.
The code of the selected colour must be added to the article code. E.g.: BTPR... 70 (chosen colour black) BTPRN 70.


USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



COLOURS

B - White	GC - Light grey	GS - Dark grey	N - Black	04W - Dark beech	05W - Light oak (strip)
06W - Dark oak (walnut)	08W - Dark cherry (board)	10W - Wenge (panga-panga-wenge)			

The shade of the wooden finish in rigid expanded vinyl resin/PVC results slightly different from the film usually applied on the profiles in aluminium.

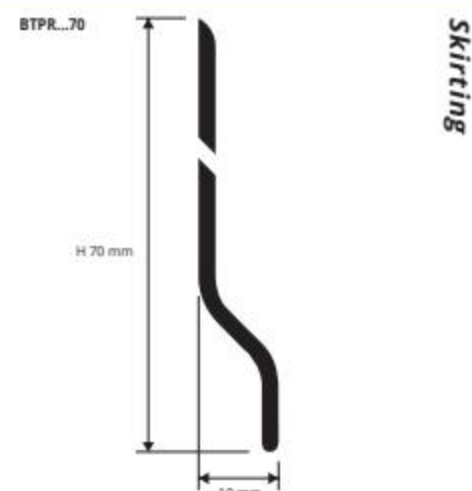

Skirting

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "SKIRTING" in the required the colour. 2. Lay the "SKIRTING" using quick-setting acrylic silicone, mastic or bostik, suitable for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with screws/nails.

ANGLE BAR produced in expanded PVC in 4 semi-matt colours and 8 wood finishes used to protect angles. Laying is done by gluing (acetic silicone - acrylic-mastic) or using screws or nails. Attractive, strong, hardwearing and economic, it is easy to lay and ideal for many public premises (hospitals, schools, gymnasiums, rest homes and creative areas) and private environments.

ANGLE BAR

EXPANDED VINYL RESIN



EXPANDED RIGID VINYL RESIN (black - light and dark grey - white)
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
AGE... 25	25 x 25	1,16	3,13

EXPANDED RIGID VINYL RESIN (wood finishes)
bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	L x H mm	€/lm	€/Pc
AGE... 25	25 x 25	1,21	3,27

Available in the wood finishes: B - GC - GS - N - 04W - 05W - 06W - 08W - 10W.
The code of the selected colour must be added to the article code. E.g.: AGE... 25 (chosen finish black) AGEKC 25.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



The shade of the wooden finish in rigid expanded vinyl resin/PVC results slightly different from the film usually applied on the profiles in aluminium.

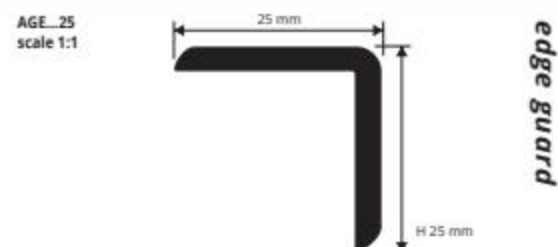

edge guard

EXAMPLES OF LAYING

