



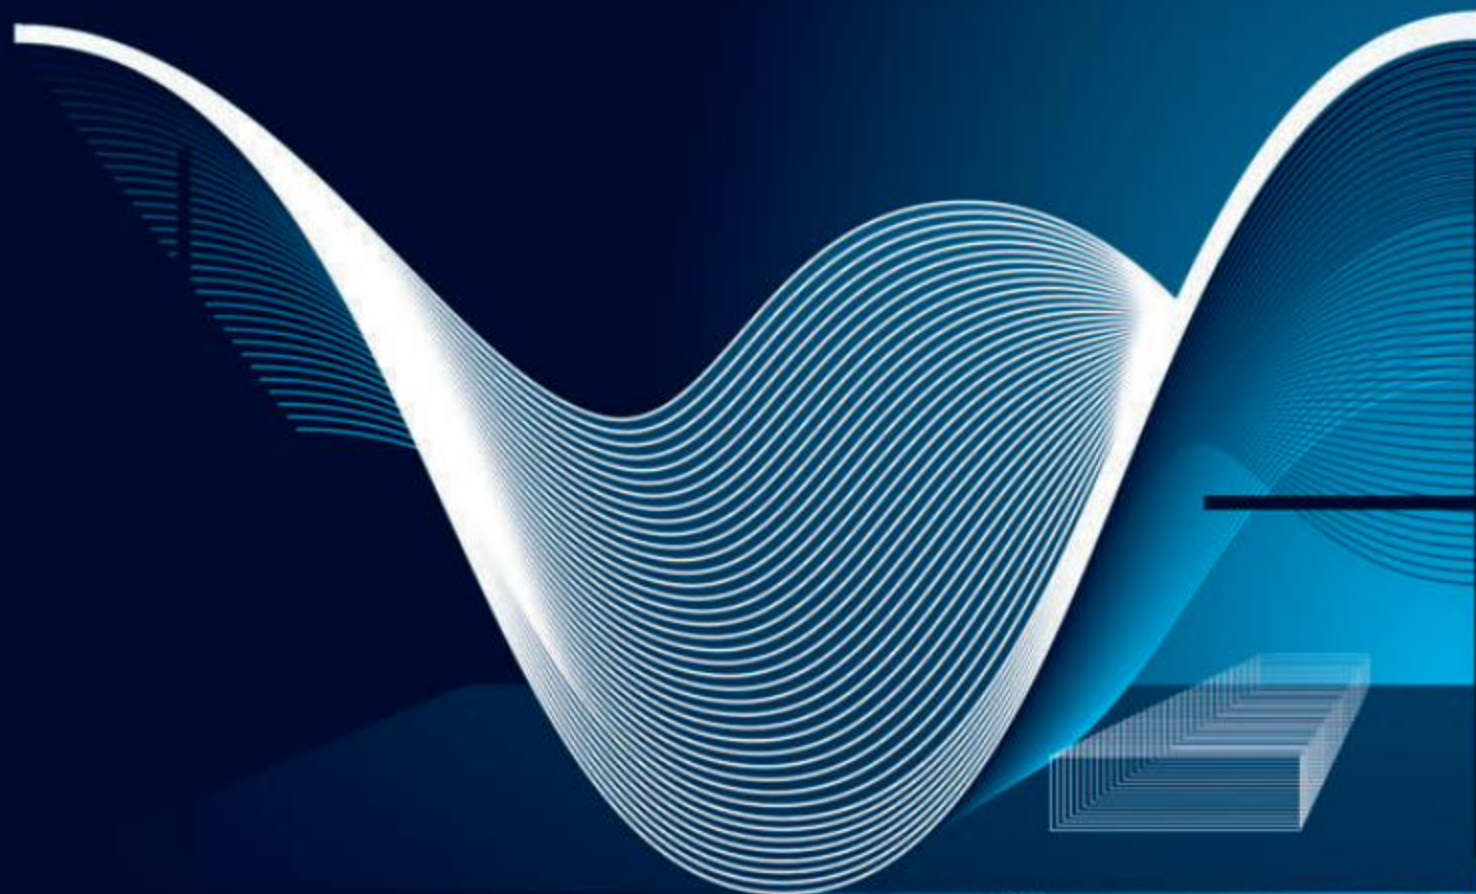

An interpretation of:
Bosjes Chapel, Steyn Studio, CAPE TOWN (South Africa), 2016

PROFILES FOR LAMINATE, PARQUET
AND CARPETED FLOORS

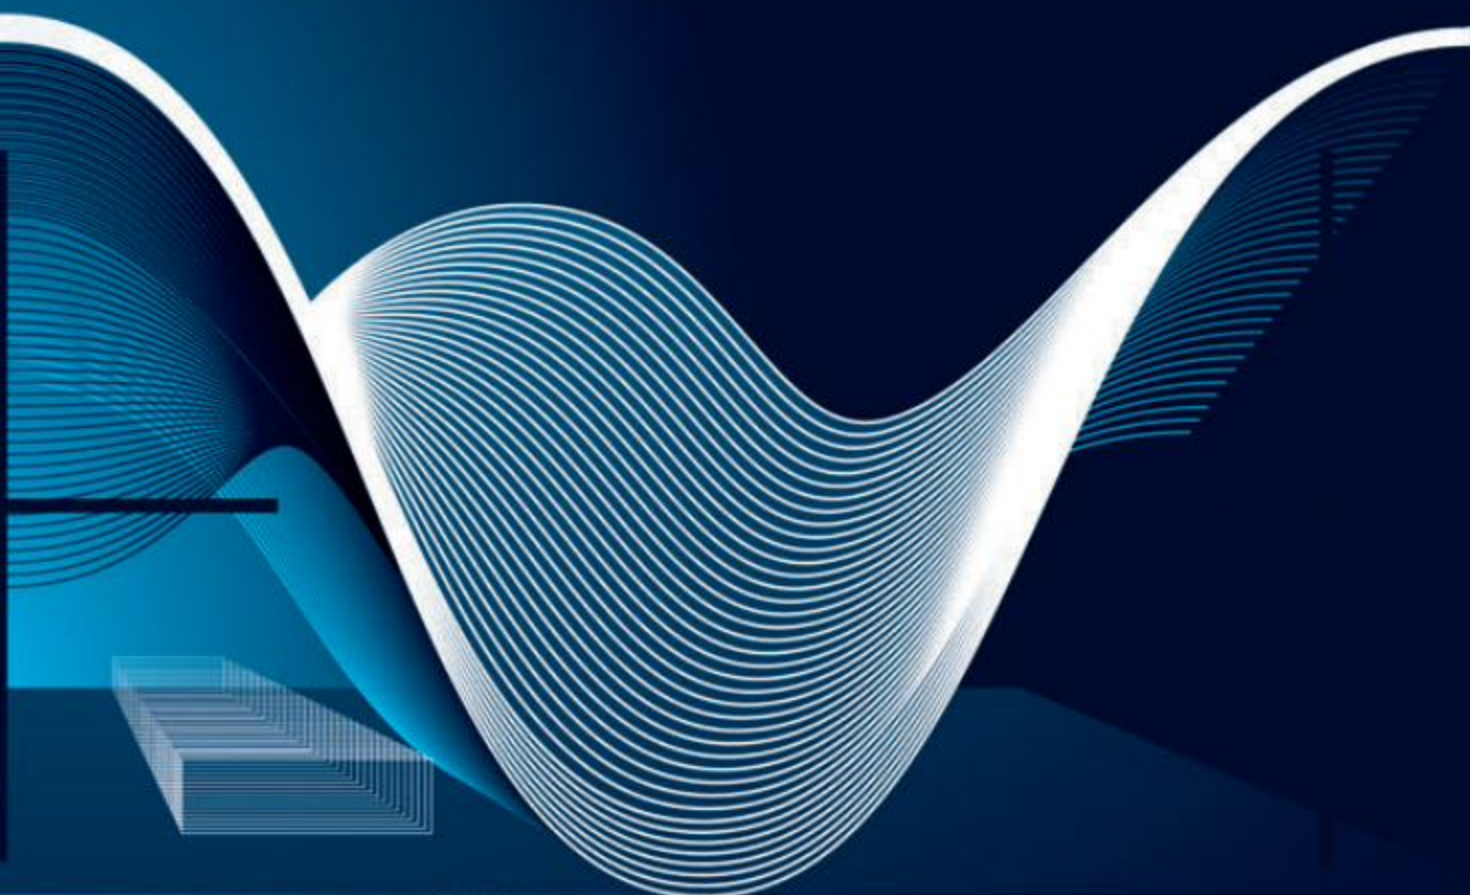

WOODEN/LVT

COLOURS
STANDARD AND ON DEMAND

For a precise assessment of colours request the wooden finishes sample range.
For sample finishes, contact the sales office for minimum quantities, timing and costs.

WOOD COLOURS

	Promultifix	Sol 40 P	Zero Curve	Terminal Pin	Terminal	Style Stair	Style Stair L	LVT	Sol 30	Profiler Line System
04W	•	•	•					•		•
05W	•	•	•	•	•	•	•	•	•	•
13W								•		•
18W		•	•	•		•		•		
21W	•					•		•		•
29W	•	•	•			•		•	•	•
30W	•	•	•	•		•		•		•
31W	•	•	•	•		•		•		•
33W		•	•	•		•		•		•
34W	•	•	•	•	•	•	•	•		•
35W								•		•
36W						•		•		•
37W	•			•	•	•	•	•		•
41W	•							•		•
42W	•	•	•					•		•
44W	•						•	•		•
48W	•			•				•		•
49W	•							•		•
53W	•							•		•
54W	•				•			•		•
56W										•
62W	•							•		•
64W										•
65W	•									•
66W	•									
71W	•							•		
74W	•									
75W	•	•	•					•		•
85W	•							•		
AA	•									
B	•									
N	•									



© 2020 All rights reserved by Progress Profiles, Printed in Italy

WOOD COLOURS

04W	05W	13W	18W	21W	29W	30W	31W	33W
34W	35W	36W	37W	41W	42W	44W	48W	49W
53W	54W	62W	65W	66W	71W	75W	85W	




For a precise assessment of colours request the wooden finishes sample range.
For sample finishes, contact the sales office for minimum quantities, timing and costs.

EXTRUDED EXPANDED PVC COLOURS

			
B - White	GC - Light grey	GS - Dark grey	N - Black
			
04W - Dark beech	05W - Light Oak	06W - Dark Oak	07W - Light cherry
			
08W - Dark cherry	09W - Red Walnut	10W - Wengé	M - Mahogany

Extruded Expanded PVC	Proseal wood	Proangle wood	Skirting	Skirting 6014-8014	Angle bar
B (White)	●	●	●	●	●
GC (Light Grey)	●	●	●	●	●
GS (Dark Grey)	●	●	●	●	●
N (Black)	●	●	●	●	●
04W (Dark Beech)	X	X	●	X	●
05W (Light Oak)	●	●	●	X	●
06W (Dark Oak)	X	X	●	X	●
07W (Light cherry)	X	X	●	X	●
08W (Dark cherry)	X	X	●	X	●
09W (Red Walnut)	X	X	●	X	●
10W (Wengé)	●	●	●	X	●
M (Mahogany)	X	X	●	X	●

ANODIZED COLOURS

			
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium
			
CH - Anod. champagne alum.	SB - Anod. sand aluminium		

Anodized Aluminium Colours	Promultifix	SOL 40P Zero Curve Terminal Pin	Terminal	Style Stair	Style Stair L	LVT	Prowalk	Prostep Ins	SOL 30	Profixer line	Proscrow
AO (anod. gold)	●	●	●	●	●	●	●	X	●	●	*
AA (anod. silver)	●	●	●	●	●	●	●	●	*	●	●
AB (anod. bronze)	●	●	●	●	●	●	●	X	*	●	*
AT (anod. titanium)	*	*	*	*	*	●	*	X	*	*	*
CH (anod. champagne)	*	*	*	*	*	●	*	X	*	*	*
SB (anod. sand)	*	*	*	*	*	●	*	X	*	*	*

● = Available finishes X = Not available finishes

* = minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

PROMULTIFIX SYSTEM®

INSTRUCTIONS FOR LAYING

PATENTED

PROGRESS PROFILES® has filed an innovative patent PROMULTIFIX SYSTEM® in respect of a wide range of aluminum profiles covered with very strong films in wooden finishes, plus anodized finishes.

The PROMULTIFIX SYSTEM® system is a multipurpose profile for finishing laminate, melamine-coated, parquet and wood floating floors.

FIXING: it can be fixed with adhesive, nylon anchors, glue, flatten down base and screws.

STANDARD Wooden FINISHES: Light oak (strip), Light cherry (strip), Red walnut (merbau-apple-walnut), Light zerbano, Oak powder, White oak, Grey oak, Victoria oak, Pink oak, Havana oak, Edinburgh oak, Carvi oak, Ice oak, Grace oak, Honey oak, Black decapè, Cork oak, Sand oak, Tripoli, Bangkok, Liotard, New white.

STANDARD ALUMINUM FINISHES: anodized Silver, Gold and Bronze.

ANODIZED COLOURS



* ANODIZED COLOURS ON DEMAND



WOODEN COLOURS

(For a precise assessment of colours request the wooden finishes sample range)



PROMULTIFIX SYSTEM

PROMULTIFIX SYSTEM is composed of an aluminium profile with adhesive, with a lengthwise groove in form of dovetail, where nylon anchors can be inserted, or a punched aluminium flatten down base for an easy and invisible fixing.

NYLON SCREW ANCHORS



PERIMETRIC SUPPORTS



FLATTEN DOWN BASE



© 2020 All rights reserved by Progress Profiles, Printed in Italy

It is a system composed of a special TOP with adhesive, with a visible surface of 44,7 mm, anodized aluminium or covered with wooden film. The aluminium TOP can be fixed to the floor in different ways: with adhesive, with nylon anchors, support with removable spacers, flatten down base.

PROMULTIFIX SYSTEM

ALUMINIUM PROFILES
FIXING KIT



TOP IN ANOD. ALUMINIUM with adhesive (6 finishes of which 3 on demand) n.3 KIT (15 screws, 12 perimeter pins, 6 joints) thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PMPFX... 42A	44,7	9,07	24,49

TOP IN ANOD. ALUMINIUM with adhesive (6 finishes of which 3 on demand) + n.1 KIT (5 screws, 4 perimeter pins, 2 joints) thermo packed 0,90 lm 15 Pcs

Article	L mm	€/lm	€/Pc
PMPFX... 42090AS	44,7	9,53	

TOP IN ALUM. COVERED with adhesive (22 wooden finishes) + n.3 KIT (15 screws, 12 perimeter pins, 6 joints) thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PMPFX... 42A	44,7	12,99	35,07

TOP IN ALUM. COVERED with adhesive (22 wooden finishes) + n.1 KIT (5 screws, 4 perimeter pins, 2 joints) thermo packed - bar length 0,90 lm - 15 Pcs

Article	L mm	€/lm	€/Pc
PMPFX... 42090AS	44,7	13,65	

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 21W - 29W - 30W - 31W - 34W - 37W - 41W - 42W - 44W - 48W - 49W - 53W - 54W - 62W - 65W - 66W - 71W - 74W - 75W - 85W. The code of the selected colour must be added to the article code. E.g.: PMPFX... 42A (chosen finish anod. gold) PMPFXAO 42A.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose the profile of the required finish, if necessary cut the TOP in the required length.
2. Clean, remove the grease and dry the substrate: the temperature should be at least of 15° C.
3. Remove the paper protection from the adhesive and lay the TOP with a vertical pressure without moving the profile.
4. Remove the paper protection from the adhesive.
5. Insert the screw anchors in the profile dovetail groove.
6. Beat with a rubber/pvc hammer to insert the screw anchors into the holes.
7. Cut the flatten down base to the requested length.
8. Remove the paper protection from the adhesive.
9. Insert the base into the profile groove dovetail, then fix or glue the base to the floor.
10. Make a uniform pressure on the profile with the hands or a rubber hammer.
11. Cut the perimeter pins according to the thickness of the floor.
12. Insert the perimeter pins into the profile groove dovetail using 4 supports per linear meter.
13. Fix the profil making a uniform pressure on the profile with the hands, but do not move the profile.

One fixing kit is composed of: 5 screws, 4 perimeter pins, 2 joints





PMPFX... 42090AS / 42A
scale 1:1



PMPFX... 42090AS / 42A
scale 1:1



PMPFX... 42090AS / 42A + PMFIXBSAN 23
scale 1:1

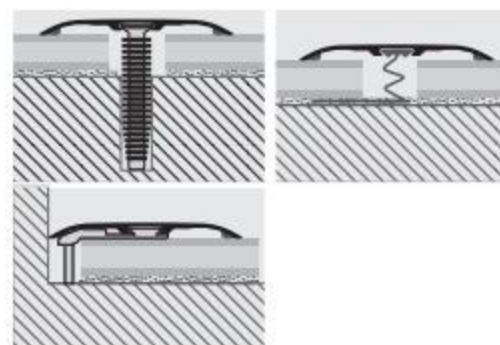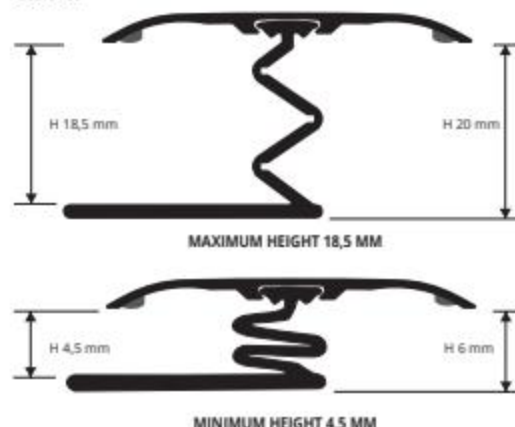

SCREWS AND SCREW ANCHORS, TAP-DOWN BASE

NICKEL - PLATED FLATHEAD SCREWS + SCREW ANCHORS
pack 1.000 Pcs

Article	Ø mm	L mm	€/Pack.
VINIPT 325	3	25	94,28



PROFIXER TAP-DOWN BASE - ALUM. PUNCHED/PERFORED
2,7 lm 20 Pcs 54 lm

Article	H mm	€/lm	€/Pc
PMFIXBSAN 23	23	6,94	18,74






PROGRESS® PROFILES has filed an innovative patent PROINSERT SYSTEM in respect of a wide range of aluminum profiles covered with very strong films in 77 wooden finishes are available, plus 6 anodized finishes.

The **PROINSERT SYSTEM** system comprises a complete set of profiles for finishing laminate, melamine-coated, parquet and wood floating floors.

INTERCHANGEABLE INSERTS in 7 heights: (H 07, 09, 11, 13, 15, 17 and 19 mm). **PROFILES COVERED** with film: resistant to wear and UV rays (classe AC1). **TWO VERSATILE VERSIONS OF BASES:** available for fixing with glue or screws.

INSTRUCTIONS FOR LAYING:

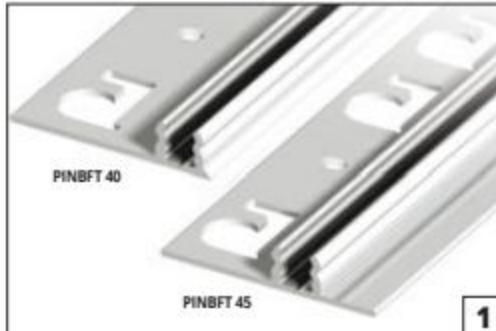


1) Choose between the two types of aluminum base.



2) Fix and/or glue the base to the floor.



3) Lay the floor correctly leaving between 3 and 10 mm gap for the natural expansion of the wood.

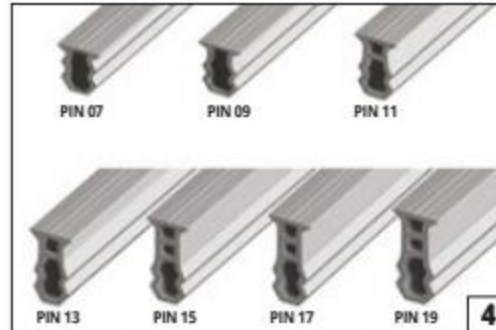

4) Choose the vinyl resin insert according to the clear height and thickness of the floor.



5) Keep the profile with the groove for insertion facing upwards and slot in the insert from the top downwards (if it does not slide easily, lubricate with water, silicone spray or vegetable oil).



6) Place the profile over the "U" shaped channel.



7) With the help of a wooden tapping block, apply pressure evenly over the whole length of the profile using a hammer. If tapping is done correctly, a "click" will be heard when the profile slots into place.

THESE PROFILES ARE APPLIED TO CREATE:

- Threshold covers and expansion joints (SOL 30, SOL 40P and SOL 50)
- Transition joints for differences in level and floors in differing materials and thickness (ZERO CURVE)
- Perimeter joints or terminal expansion pieces (TERMINAL PIN)
- Corner joints and step nosings (serie STYLE STAIR)

SOL 30, SOL 40P AND SOL 50



ZERO CURVE



TERMINAL PIN



STYLE STAIR / STYLE STAIR L



PROFIXER LINE SYSTEM

The **PROFIXER LINE SYSTEM** comprises an assortment of profiles in aluminum with a longitudinal dovetail groove/channel into which the anchors or the tap-down punched/perforated aluminum profile may be inserted for easy and invisible fixing.

NYLON SCREW ANCHORS



TAP-DOWN BASE



SOL 40P range comprises a large assortment of universal jointing profiles in aluminium covered with film that is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Thanks to the insert in rigid PVC (non-conducting) between the base and the top, the new **SOL 40P** stops and eliminates electrostatic charges and magnetic fields and whatever else may be transmitted between two floors (e.g.: heated floors). available in wooden finishes, plus anodized finishes. Any insert of height H 7, 9, 11, 13, 15, 17 and 19 mm may be used with either the punched/perforated base for screwing or for gluing. Covering width 40 mm.

SOL 40P

TOP IN WOODEN OR ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE



ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PIN 17, 19 - 40,5 lm)

Article	H mm	€/lm	€/Pc
PISPC... 407 (PIN 07)	7 / 10	15,59	42,09
PISPC... 409 (PIN 09)	9 / 12	15,74	42,50
PISPC... 4011 (PIN 11)	11 / 14	15,87	42,85
PISPC... 4013 (PIN 13)	13 / 16	16,03	43,28
PISPC... 4015 (PIN 15)	15 / 18	16,18	43,69
PISPC... 4017 (PIN 17)	17 / 20	16,44	44,39
PISPC... 4019 (PIN 19)	19 / 22	16,64	44,93

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
length 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)

Article	H mm	€/Pc
PISPC... 4079S (PIN 07)	7 / 10	15,94
PISPC... 4099S (PIN 09)	9 / 12	16,17
PISPC... 40119S (PIN 11)	11 / 14	16,43
PISPC... 40139S (PIN 13)	13 / 16	16,72
PISPC... 40159S (PIN 15)	15 / 18	17,01
PISPC... 40179S (PIN 17)	17 / 20	17,45
PISPC... 40199S (PIN 19)	19 / 22	17,89



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(10 wooden finishes) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PIN 17, 19 - 40,5 lm)

Article	H mm	€/lm	€/Pc
PISPC... 407 (PIN 07)	7 / 10	21,67	58,51
PISPC... 409 (PIN 09)	9 / 12	21,84	58,97
PISPC... 4011 (PIN 11)	11 / 14	21,98	59,35
PISPC... 4013 (PIN 13)	13 / 16	22,10	59,67
PISPC... 4015 (PIN 15)	15 / 18	22,28	60,16
PISPC... 4017 (PIN 17)	17 / 20	22,58	60,97
PISPC... 4019 (PIN 19)	19 / 22	22,93	61,91

COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(10 wooden finishes) thermo packed
length 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 PCS)

Article	H mm	€/Pc
PISPC... 4079S (PIN 07)	7 / 10	21,50
PISPC... 4099S (PIN 09)	9 / 12	21,79
PISPC... 40119S (PIN 11)	11 / 14	22,06
PISPC... 40139S (PIN 13)	13 / 16	22,36
PISPC... 40159S (PIN 15)	15 / 18	22,66
PISPC... 40179S (PIN 17)	17 / 20	23,11
PISPC... 40199S (PIN 19)	19 / 22	23,57




Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 18W - 29W - 30W - 31W - 33W - 34W - 42W - 75W.

The code of the selected colour must be added to the article code. E.g.: PISPC... 4079S (chosen finish anod. gold) PISPCAO 4079S.


ANODIZED COLOURS



* ANODIZED COLOURS ON DEMAND



WOODEN COLOURS

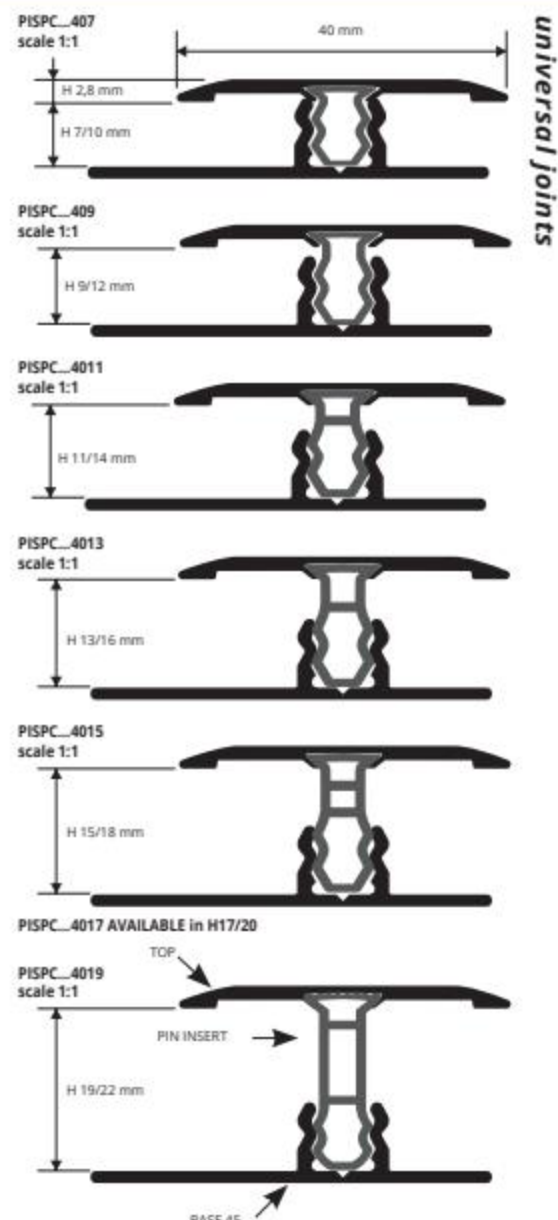

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix and/or glue the base to the floor. 2. Lay the floor leaving from 3 to 10 mm between the floor and the insert. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.


* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

ZERO CURVE

TOP IN WOODEN FINISHES
AND ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE

The **ZERO CURVE** range comprises a large assortment of terminal transition profiles for joining floors at different levels and with different thickness varying from 7 to 20 mm. wooden finishes are available, plus anodized finishes. There is a profile (top) and an insert (pin) for each height, while the base (punched or perforated) allows fixing by screwing or gluing.

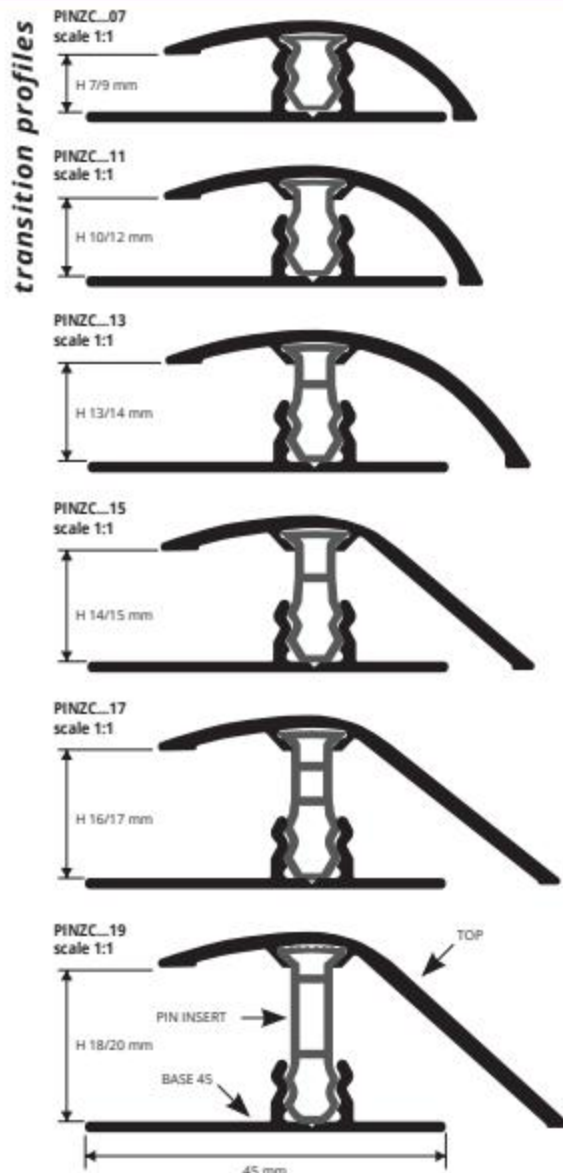

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack 20 Pcs - 54 lm - (PIN 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm	€/lm	€/Pc
PINZC... 07 (top PINZ... 07 + PIN 07)	7 / 9	15,07	40,69
PINZC... 11 (top PINZ... 07 + PIN 11)	10 / 12	15,79	42,63
PINZC... 13 (top PINZ... 09 + PIN 13)	13 / 14	16,01	43,23
PINZC... 15 (top PINZ... 13 + PIN 15)	14 / 15	16,22	43,79
PINZC... 17 (top PINZ... 13 + PIN 17)	16 / 17	16,66	44,98
PINZC... 19 (top PINZ... 15 + PIN 19)	18 / 20	17,21	46,47

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)

Article	H mm	€/Pc
PINZC... 07S (top PINZ... 07 + PIN 07)	7 / 9	14,75
PINZC... 11S (top PINZ... 07 + PIN 11)	10 / 12	15,76
PINZC... 13S (top PINZ... 09 + PIN 13)	13 / 14	16,00
PINZC... 15S (top PINZ... 13 + PIN 15)	14 / 15	16,22
PINZC... 17S (top PINZ... 13 + PIN 17)	16 / 17	16,63
PINZC... 19S (top PINZ... 15 + PIN 19)	18 / 20	17,06



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(10 wooden finishes) thermo packed
bar length 2,7 lm - pack 20 Pcs - 54 lm - (PIN 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm	€/lm	€/Pc
PINZC... 07 (top PINZ... 07 + PIN 07)	7 / 9	21,78	58,81
PINZC... 11 (top PINZ... 07 + PIN 11)	10 / 12	22,38	60,43
PINZC... 13 (top PINZ... 09 + PIN 13)	13 / 14	22,66	61,18
PINZC... 15 (top PINZ... 13 + PIN 15)	14 / 15	22,96	61,99
PINZC... 17 (top PINZ... 13 + PIN 17)	16 / 17	23,24	62,75
PINZC... 19 (top PINZ... 15 + PIN 19)	18 / 20	23,76	64,15

COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(10 wooden finishes) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)

Article	H mm	€/Pc
PINZC... 07S (top PINZ... 07 + PIN 07)	7 / 9	21,44
PINZC... 11S (top PINZ... 07 + PIN 11)	10 / 12	22,35
PINZC... 13S (top PINZ... 09 + PIN 13)	13 / 14	22,66
PINZC... 15S (top PINZ... 13 + PIN 15)	14 / 15	22,93
PINZC... 17S (top PINZ... 13 + PIN 17)	16 / 17	23,23
PINZC... 19S (top PINZ... 15 + PIN 19)	18 / 20	23,62



ANODIZED COLOURS



* ANODIZED COLOURS ON DEMAND



WOODEN COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix and/or glue the base to the floor. 2. Lay the floor leaving from 3 to 10 mm between the floor and the insert. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.




TERMINAL PIN

TOP IN WOODEN FINISHES
AND ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE

The **TERMINAL PIN** series consists in a wide range of terminal/ outer joint squares ideal to realize the connection and junction with floors in laminate or melamine and/or wood/parquet rolled floor. The **TERMINAL PIN** allows the floor underneath to expand for more than 5 / 10 mm. It prevents from the use of the skirting -board and covers perfectly any kind of floor with a minimum thickness of 7 mm and a maximum of 22 mm. It delimitates the floor in proximity of walls, coverings, windows, doors, sliding doors, doormats buss etc.

terminal - outer profiles

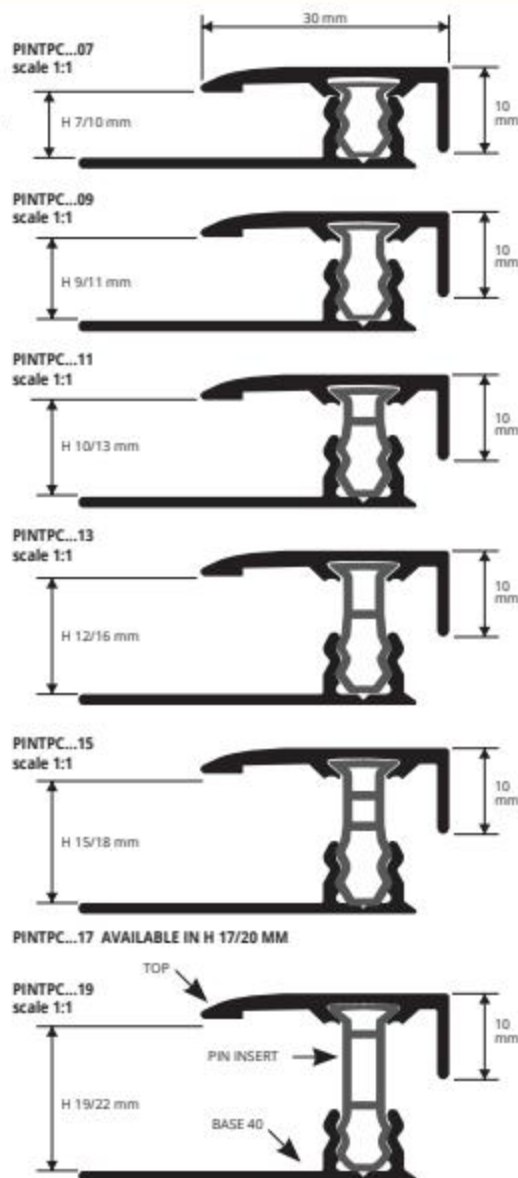

ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack 20 Pcs - 54 lm (PIN 11, 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm	€/lm	€/Pc
PINTPC... 07 (PIN 07)	7 / 10	13,86	37,42
PINTPC... 09 (PIN 09)	9 / 11	14,29	38,58
PINTPC... 11 (PIN 11)	10 / 13	14,73	39,77
PINTPC... 13 (PIN 13)	12 / 16	15,26	41,20
PINTPC... 15 (PIN 15)	15 / 18	16,00	43,20
PINTPC... 17 (PIN 17)	17 / 20	16,88	45,58
PINTPC... 19 (PIN 19)	19 / 22	17,76	47,95


COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)

Article	H mm	€/Pc
PINTPC... 07S (PIN 07)	7 / 10	14,98
PINTPC... 09S (PIN 09)	9 / 11	15,50
PINTPC... 11S (PIN 11)	10 / 13	16,04
PINTPC... 13S (PIN 13)	12 / 16	16,55
PINTPC... 15S (PIN 15)	15 / 18	17,06
PINTPC... 17S (PIN 17)	17 / 20	16,63
PINTPC... 19S (PIN 19)	19 / 22	18,62

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 05W - 18W - 30W - 31W - 33W - 34W - 37W - 48W. The code of the selected colour must be added to the article code. E.g.: PINTPC... 07S (chosen finish anod. gold) PINTPCAQ 07S.

ANODIZED COLOURS



*ANODIZED COLOURS ON DEMAND



WOODEN COLOURS



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(8 wooden finishes) thermo packed
bar length 2,7 lm - pack 20 Pcs - 54 lm (PIN 11, 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm	€/lm	€/Pc
PINTPC... 07 (PIN 07)	7 / 10	19,49	52,62
PINTPC... 09 (PIN 09)	9 / 11	20,09	54,24
PINTPC... 11 (PIN 11)	10 / 13	20,70	55,89
PINTPC... 13 (PIN 13)	12 / 16	21,54	58,16
PINTPC... 15 (PIN 15)	15 / 18	22,38	60,43
PINTPC... 17 (PIN 17)	17 / 20	23,57	63,64
PINTPC... 19 (PIN 19)	19 / 22	24,66	66,58

COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(8 wooden finishes) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)

Article	H mm	€/Pc
PINTPC... 07S (PIN 07)	7 / 10	20,61
PINTPC... 09S (PIN 09)	9 / 11	21,25
PINTPC... 11S (PIN 11)	10 / 13	21,58
PINTPC... 13S (PIN 13)	12 / 16	22,28
PINTPC... 15S (PIN 15)	15 / 18	22,84
PINTPC... 17S (PIN 17)	17 / 20	23,23
PINTPC... 19S (PIN 19)	19 / 22	24,06

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix PINBFTL 40 base at the outer edge/wall.
2. Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on each side to accommodate the natural expansion between the floor and the base.
3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific 'dovetail' seat. The position the profile above the U-shaped snap-in seat of the base.
4. With the aid of a board, hammer the TOP to the desired fitting level.

The **TERMINAL** range comprises a large assortment of perimeter joint or edging profiles in aluminium covered in wooden finishes are available, plus anodized finishes. They are used in various laying situations. Ideal as an edging profile for wood parquet, laminate and melamine-coated floors. They finish the floor where it joins to abutting surfaces, windows, glazed areas, doors, terraces and may also be used for joining two floors: wood/tiles, wood/carpeting.

TERMINAL

ALUMINIUM COVERED WOODEN FINISHES
AND ANODIZED FINISHES



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm
(H 11 - H 13 - H 15 mm - 80 lm)

Article	H mm	€/lm	€/Pc
PINT... 07	7	6,78	18,31
PINT... 09	9	6,94	18,74
PINT... 11	11	7,09	19,14
PINT... 13	13	7,34	19,82
PINT... 15	15	7,64	20,63

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 05W-34W-37W-54W.

The code of the selected colour must be added to the article code. E.g.: PINT... 07 (chosen finish anod. gold) PINTAO 07.

ANODIZED ALUM. (6 anod. alum. finishes of which 3 on demand)
thermo packed

bar length 0,90 lm - 20 Pcs - BLISTER PACKS

Article	H mm	€/Pc
PINT... 07S	7 / 8	7,61
PINT... 09S	9 / 10	7,76
PINT... 11S	11 / 12	7,91
PINT... 15S	15 / 16	8,52

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 05W-34W-37W-54W.

The code of the selected colour must be added to the article code. E.g.: PINT... 07S (chosen finish anod. gold) PINTAO 07S.



ALUMINIUM COVERED (4 wooden finishes)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm
(H 11 - H 15 mm - 80 lm)


Article	H mm	€/lm	€/Pc
PINT... 09	9	10,89	29,40
PINT... 11	11	11,20	30,24
PINT... 15	15	12,97	35,02

ALUMINIUM COVERED (4 wooden finishes)
thermo packed

bar length 0,90 lm - 20 Pcs - BLISTER PACKS

Article	H mm	€/Pc
PINT... 09S	9 / 10	13,94
PINT... 11S	11 / 12	14,02
PINT... 15S	15 / 16	14,61

PINT... 07
scale 1:1



PINT... 09
scale 1:1




PINT... 11
scale 1:1



PINT... 13
scale 1:1



PINT... 15
scale 1:1

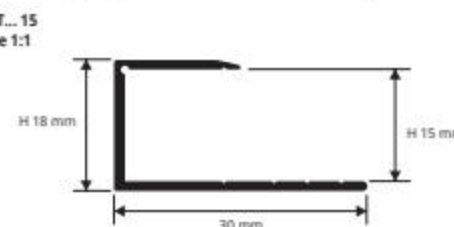

terminal - outer profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the **TERMINAL** according to the required height and finish and fix with screws and screw anchors or with glue/silicone; the profile must be placed next to the abutting surface e.g. wall, glazing, etc. 2. Align the laminate/melamine/wood floor, ensuring that a large enough gap is left to accommodate the natural expansion between the floor and the profile (approx. 3/10mm on one side).

ANODIZED COLOURS



* ANODIZED COLOURS ON DEMAND



WOODEN COLOURS



* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

STYLE STAIR

TOP IN WOODEN FINISHES
and ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE

The **STYLE STAIR** range comprises a large assortment of aluminium step nosing profiles for the edges of steps in wood, parquet, laminate or melamine with thickness varying from 7 to 20 mm. wooden finishes are available, plus anodized finishes. Select the most suitable profile for the thickness of the floor. There is a profile (top) and an insert (pin) for each height, while the base (punched or perforated) allows fixing by screwing or gluing.

stair nosing profiles

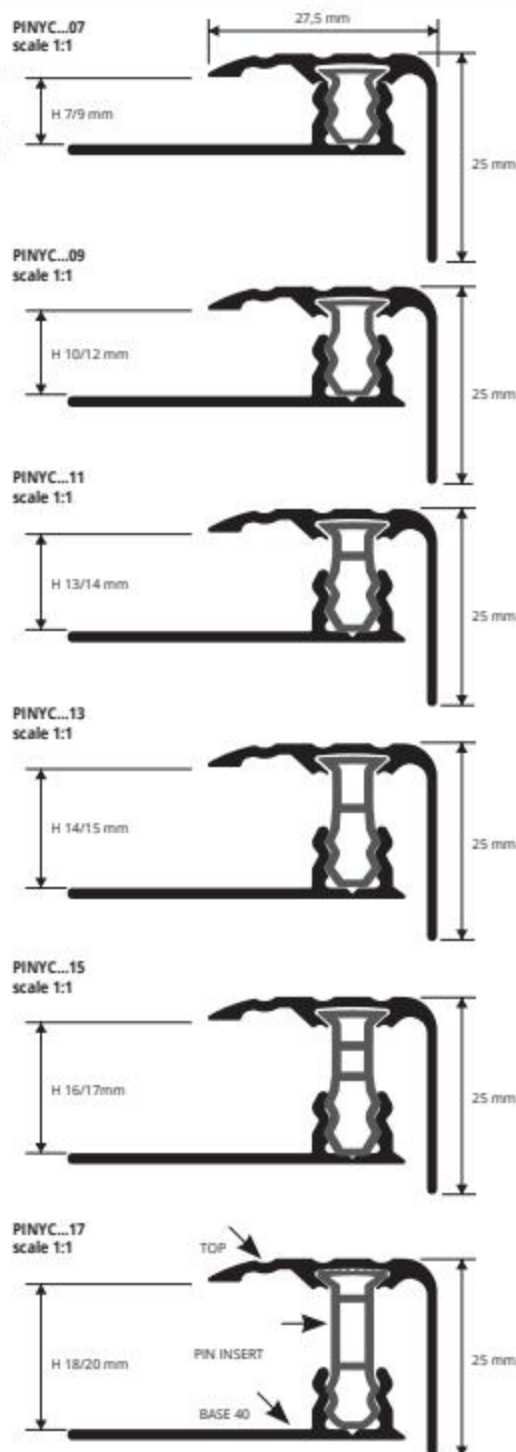

ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED (6 anod. alum. finishes of which 3 on demand) thermo packed bar length 2,7 lm - pack 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

Article	H mm	€/lm	€/Pc
PINYC... 07 (PIN 07)	7 / 9	14,27	38,53
PINYC... 09 (PIN 09)	10 / 12	14,67	39,61
PINYC... 11 (PIN 11)	13 / 14	15,07	40,69
PINYC... 13 (PIN 13)	14 / 15	15,48	41,80
PINYC... 15 (PIN 15)	16 / 17	15,86	42,82
PINYC... 17 (PIN 17)	18 / 20	16,27	43,93

COMPLETE

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 05W - 18W - 21W - 29W - 30W - 31W - 33W - 34W - 36W - 37W. The code of the selected colour must be added to the article code. E.g.: PINYC... 07 (chosen finish anod. gold) PINYCAO 07.



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED (10 wooden finishes) thermo packed bar length 2,7 lm - pack 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

Article	H mm	€/lm	€/Pc
PINYC... 07 (PIN 07)	7 / 9	20,62	55,67
PINYC... 09 (PIN 09)	10 / 12	20,98	56,65
PINYC... 11 (PIN 11)	13 / 14	21,39	57,75
PINYC... 13 (PIN 13)	14 / 15	21,79	58,83
PINYC... 15 (PIN 15)	16 / 17	22,21	59,97
PINYC... 17 (PIN 17)	18 / 20	22,58	60,97

COMPLETE

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



TOP IN ANODIZED FINISHES



TOP IN WOODEN FINISHES

1. Fix the base exactly over the stair riser. 2. Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on one side to accommodate the natural expansion between the floor and the base. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.

ANODIZED COLOURS



* ANODIZED COLOURS ON DEMAND



WOODEN COLOURS



On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

STYLE STAIR L comprises a large range of aluminium stair nosing protecting profiles for step in timber, parquet, laminate or melamine material with thickness varying from 7 to 20 mm. wooden finishes are available, plus anodized finishes. The profiles is made with 3 pcs. A natural aluminium base to screw or glue to the pavement, a PIN in non-toxic rigid to insert in the TOP, then a TOP should be selected most suitable for the floor.

STYLE STAIR L

TOP IN WOODEN FINISHES
AND ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE




ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

Article	H mm	€/lm	€/Pc
PINYLC... 07 (PIN 07)	7 / 9	14,67	39,61
PINYLC... 09 (PIN 09)	10 / 12	15,07	40,69
PINYLC... 11 (PIN 11)	13 / 14	15,48	41,80
PINYLC... 13 (PIN 13)	14 / 15	15,86	42,82
PINYLC... 15 (PIN 15)	16 / 17	16,27	43,93
PINYLC... 17 (PIN 17)	18 / 20	16,68	45,04

COMPLETE

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 05W - 34W - 37W - 44W. The code of the selected colour must be added to the article code. E.g.: PINYLC... 07 (chosen finish anod. gold) PINYLCAO 07.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



TOP IN ANODIZED FINISHES




TOP IN WOODEN FINISHES

1. Fix the base exactly over the stair riser. 2. Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on one side to accommodate the natural expansion between the floor and the base. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.







ANODIZED COLOURS



* ANODIZED COLOURS ON DEMAND



WOODEN COLOURS

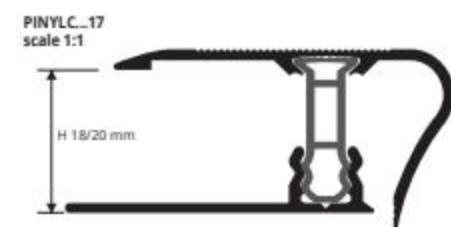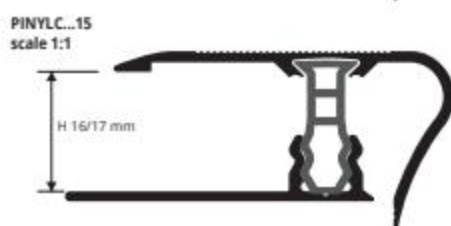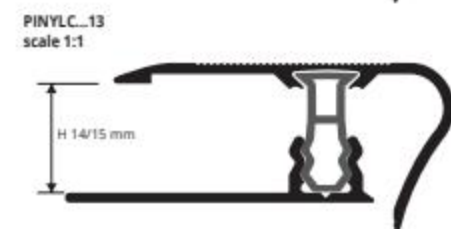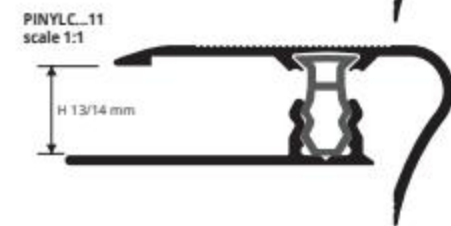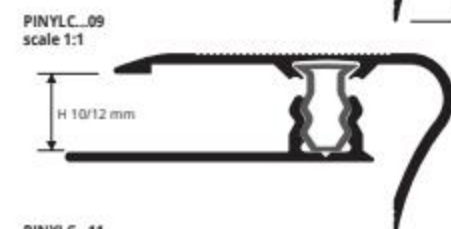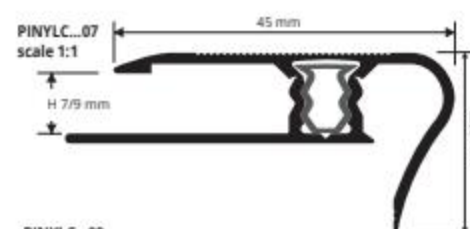

transition profiles

WOODEN/LVT

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.



UNIVERSAL, CONNECTION AND PERIMETER JOINTS



SOL 30P



ZERO CURVE



TERMINAL PIN

CONNECTION JOINTS



**PROINTER KL
ACC / ALL**



**PROSHELL D
ALL**



**PROSHELL R
ALL**



PROLEVALL 305



PROLINOLEUM



PROFLOOR 24



**PROSLIDER KL
ALL**



**PROCOVER
1045 ALL**

STAIR NOSINGS PROFILES



PROSTYLE KL 10



PROSTAIR KL 20


LVT PROFILES - SOL 30P

AWOODEN FINISHES and ANODIZED FINISHES

SOL 30P, ZERO CURVE AND TERMINAL PIN are profile which serve as expansion joints, junction and as perimetrical expansion joint between different floors in vinyl. The profiles are composed of a BASE in PVC to fix to the support and of three TOP. The choice of the TOP depend on the desired application. Their particular section, together with the wide range of finishes available and the ease of installation, make them a much-sought profiles, that could be easily matched with every type of floor in vinyl.

universal joints

PISPC... 3046
PISPCAA 4046
scale 1:1



EXAMPLES OF LAYING



INSTRUCTIONS FOR LAYING METHODS

1. Choose SOL P / ZERO CURVE / TERMINAL PIN according to the desired finish. 2. Cut the BASE in vinyl resin/PVC to the desired length and fix it with adhesive or dowels to the support. 3. Lay the floor in vinyl, leaving a 5 mm joint between the vertical walls of the base in vinyl resin/PVC and the floor. 4. Cut the desired TOP in aluminium to the desired length. 5. Place a small wooden board on the TOP in aluminium and hammer equally in order to facilitate the insertion of the TOP into the pvc base.



ALUMINIUM TOP 6 anod. finishes (3 on demand) + BASE (vinyl resin/PVC) -thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PISPC... 3046	30	8,00	21,60

The code of the selected colour must be added to the article code. E.g.: PISPC... 3046 (chosen finish anod. gold) PISPCAO 3046.

ALUMINIUM TOP 24 wooden finishes + BASE (vinyl resin/PVC) -thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PISPC... 3046	30	11,68	31,54

The code of the selected colour must be added to the article code. E.g.: PISPC... 3046 (chosen finish anod. gold) PISPCAO 3046.

ALUMINIUM TOP (anod. silver) + BASE (vinyl resin/PVC) thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PISPCAA 4046	40	8,36	22,57

LVT PROFILES - ZERO CURVE

WOODEN FINISHES and ANODIZED FINISHES

transition profiles

PINZC... 2646
PINZCAA 3246
scale 1:1



EXAMPLES OF LAYING



ALUMINIUM TOP (anod. silver) + BASE (vinyl resin/PVC) thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINZCAA 3246	32	8,36	22,57

ALUMINIUM TOP 6 anod. finishes (3 on demand) + BASE (vinyl resin/PVC) -thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINZC... 2646	26	8,00	21,60

The code of the selected colour must be added to the article code. E.g.: PINZC... 2646 (chosen finish anod. gold) PINZCAO 2646.

ALUMINIUM TOP 24 wooden finishes + BASE (vinyl resin/PVC) -thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINZC... 2646	26	11,68	31,54


The code of the selected colour must be added to the article code. E.g.: PINZC... 2646 (chosen finish anod. gold) PINZCAO 2646.

LVT PROFILES - TERMINAL PIN

WOODEN FINISHES and ANODIZED FINISHES

terminal

PINTPC... 1946
PINTPCAA 2546
scale 1:1



EXAMPLES OF LAYING



ALUMINIUM TOP (anod. silver) + BASE (vinyl resin/PVC) thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINTPCAA 2546	25	8,36	22,57

ALUMINIUM TOP 6 anod. finishes (3 on demand) + BASE (vinyl resin/PVC) -thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINTPC... 1946	19	8,00	21,60

The code of the selected colour must be added to the article code. E.g.: PINTPC... 1946 (chosen finish anod. gold) PINTPCAO 1946.

ALUMINIUM TOP 24 wooden finishes + BASE (vinyl resin/PVC) -thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINTPC... 1946	19	11,68	31,54

The code of the selected colour must be added to the article code. E.g.: PINTPC... 1946 (chosen finish anod. gold) PINTPCAO 1946.

COLOURS

(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED						ON DEMAND - MINIMUM QUANTITY 200 PCS			
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium				
04W - Dark beech	05W - Light oak (strip)	13W - Teak indonesia	18W - Light auburn	21W - Oak powder	29W - White oak	30W - Grey oak	31W - Victoria oak	33W - Sawn oak	
34W - Havana oak	35W - Carvalho Edimburgo	36W - American oak	37W - Carvi oak	41W - Ice oak	42W - Grace oak	44W - Honey oak	48W - Sobreiro	49W - Sand oak	
53W	54W	62W	71W	75W - Lissand	85W				

LVT PROFILES - SOL 30P

ALUMINIUM ANODIZED FINISHES
AND WOODEN FINISHES

ALUMINIUM TOP 24 wooden fin. "...W", 6 anodized fin. (3 on demand)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PNSP... 3046	30	4,72	12,74
PNSP...W 3046	30	8,08	21,82

Available in the anodized finishes: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 04W - 05W - 13W - 18W - 21W - 29W - 30W - 31W - 33W - 34W - 35W - 36W - 37W - 41W - 42W - 44W - 48W - 49W - 53W - 54W - 62W - 71W - 75W - 85W. The code of the selected colour must be added to the article code. E.g.: PNSP... 3046 (chosen finish anod. gold) PNSPAO 3046.

ALUMINIUM TOP (anod. silver)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PNSPAA 4046	40	5,04	13,61



BASE (vinyl resin/PVC) - bar length 2,7 lm

Article	L mm	€/lm	€/Pc
PINBFT 3646	36	2,55	6,89



LVT PROFILES - ZERO CURVE

ALUMINIUM ANODIZED FINISHES
AND WOODEN FINISHES

ALUMINIUM TOP 24 wooden fin. "...W", 6 anodized fin. (3 on demand)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINZ... 2646	26	4,72	12,74
PINZ...W 2646	26	8,08	21,82

ALUMINIUM TOP (anod. silver)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINZAA 3246	32	5,04	13,61



BASE (vinyl resin/PVC) - bar length 2,7 lm

Article	L mm	€/lm	€/Pc
PINBFT 2346	23	2,55	6,89



LVT PROFILES - TERMINAL PIN

ALUMINIUM ANODIZED FINISHES
AND WOODEN FINISHES

ALUMINIUM TOP 24 wooden fin. "...W", 6 anodized fin. (3 on demand)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINTP... 1946	19	4,72	12,74
PINTP...W 1946	19	8,08	21,82


ALUMINIUM TOP (anod. silver)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINTPAA 2546	25	5,04	13,61



BASE (vinyl resin/PVC) - bar length 2,7 lm

Article	L mm	€/lm	€/Pc
PINBFT 2346	23	2,55	6,89



COLOURS

(For a precise assessment of colours request the wooden finishes sample range)


ANODIZED									
ON DEMAND - MINIMUM QUANTITY 200 PCS									
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium				
04W - Dark beech	05W - Light oak (strip)	13W - Teak Indonesia	18W - Light arbutus	21W - Oak powder	29W - White oak	30W - Grey oak	31W - Victoria oak	33W - Sawn oak	
34W - Havana oak	35W - Carvalho Edimburgo	36W - American oak	37W - Cane oak	41W - Ice oak	42W - Grace oak	44W - Honey oak	48W - Sobreiro	49W - Sand oak	
53W	54W	62W	71W	75W - Lissard	85W				

SOL 30 SELF-ADHESIVE

ALUMINIUM COVERED WITH PROTECTIVE FILM
IN WOODEN FINISHES

SOL 30 self-adhesive is a joint/threshold cover profile in aluminum covered with film wooden finishes, which is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Easy to lay and to match with any wood finish; the surface has an open pore embossed finish. Recommended for covering joints between floors in laminate, wood, ceramic tiles, etc.

threshold - joint-cover profiles

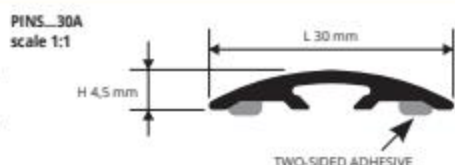

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the adhesive "SOL 30" in the required finish. 2. Cut the profile to the required length and clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers.




ALUMINIUM COVERED 2 wooden finishes with ADHESIVE
thermo packed - length 30 mm - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PINS...30A	30	12,16	32,83

Available in the wooden finishes: 05W - 29W.

The code of the selected colour must be added to the article code. E.g.: PINS... 30A (chosen finish dark beech) PINS04W 30A.

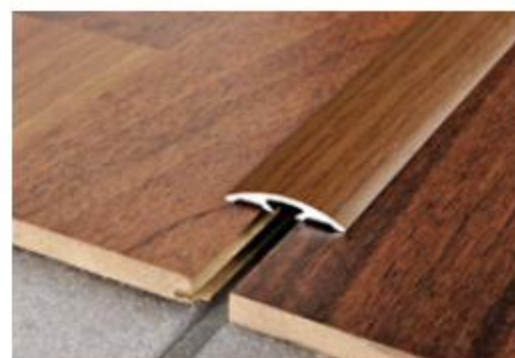

ALUMINIUM COVERED 2 wooden finishes with
ADHESIVE - thermo packed - bar length 0,90 lm - 20 Pcs

Article	L mm	€/Pc
PINS...309AS	30	12,45




ZERO CURVE SELF-ADHESIVE

ALUMINIUM COVERED WITH WOODEN FINISHES
AND ANODIZED ALUMINIUM

ZERO CURVE self-adhesive is a transition profile in anodised aluminum and aluminum covered with film in wooden finishes, which is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Easy to lay and to match with any wood finish; the surface has an open pore embossed finish. Recommended for covering joints between floors in laminate, wood, ceramic tiles, etc.

transition profiles

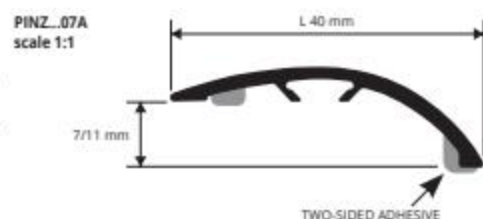

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "ZERO CURVE" with adhesive with the required finish. 2. Cut the profile to the required length and clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using an iron/steel hammer.



ALUMINIUM COVERED 10 wooden finishes with ADHESIVE thermo packed -
length 40 mm - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PINZ...07A	40	18,88	50,98
PINZAA 07A	40	10,58	28,57

Available in the finish: AA - 04W - 05W - 18W - 29W - 30W - 31W - 33W - 34W - 42W - 75W.

The code of the selected colour must be added to the article code. E.g.: PINZ... 07A (chosen finish dark beech) PINZ04W 07A.



ALUMINIUM COVERED 10 wooden finishes with ADHESIVE
thermo packed - bar length 0,90 lm - 20 Pcs

Article	L mm	€/Pc
PINZ...079AS	40	18,81



COLOURS

(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED								
AA - Anod. silver aluminium								
04W - Dark beech	05W - Light oak (strip)	18W - Light zerbano	29W - White oak	30W - Grey oak	31W - Victoria oak	33W - Sawed oak	34W - Havana oak	42W - Grace oak
75W - Liscard								

SOL 40P self-adhesive is a joint/threshold cover profile in aluminum covered with film in wooden finishes, which is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Easy to lay and to match with any wood finish; the surface has an open pore embossed finish. Recommended for covering joints between floors in laminate, wood, ceramic tiles, etc.

SOL 40P SELF-ADHESIVE

ALUMINIUM COVERED WOODEN FINISHES



SILVER ANODIZED ALUMINUM with ADHESIVE
thermo packed - length 40 mm - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PNSPAA 40 PA	40	9,34	25,22

ALUMINIUM COVERED 10 wooden finishes with ADHESIVE
thermo packed - length 40 mm - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PNSP.. 40 PA	40	17,15	46,31

SILVER ANODIZED ALUMINUM with ADHESIVE
thermo packed - bar length 90 cm - pack. 20 Pcs

Article	L mm	€/Pc
PNSPAA 409 PAS	40	9,27

ALUMINIUM COVERED 10 wooden finishes with ADHESIVE - thermo packed - bar length 0,90 lm - 20 Pcs

Article	L mm	€/Pc
PNSP.. 409 PAS	40	17,50

ALUMINIUM COVERED 10 wooden finishes with ADHESIVE - thermo packed - bar length 1 lm - 20 Pcs


Article	L mm	€/Pc
PNSPAA 4010 PAS	40	10,25

SILVER ANODIZED ALUMINUM with ADHESIVE - thermo packed - bar length 1 lm - 20 Pcs

Article	L mm	€/Pc
PNSP.. 4010 PAS	40	19,18

Available in the colours: AA - 04W - 05W - 18W - 29W - 30W - 31W - 33W - 34W - 42W - 75W.

The code of the selected colour must be added to the article code. E.g.: PNSP... 40 PA (chosen finish dark beech) PNSP04W 40 PA.

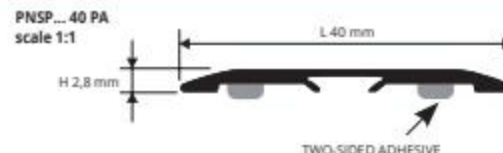

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the adhesive "SOL 40" in the required finish. 2. Cut the profile to the required length and clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers.

threshold - joint-cover profiles

COLOURS

(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED								
AA - Anod. silver aluminium								
04W - Dark beech	05W - Light oak (strip)	18W - Light ashbano	29W - White oak	30W - Grey oak	31W - Victoria oak	33W - Sanded oak	34W - Havana oak	42W - Grace oak
75W - Lizard								




PROFIXER LINE SYSTEM

ZERO CURVE INSERTS + NYLON ANCHORS + BASE
WOODEN FINISHES AND ANODIZED FINISHES

The **PROFIXER LINE SYSTEM** comprises an assortment of profiles in aluminium with a longitudinal dovetail groove/channel into which the anchors or the tap-down punched/perforated aluminium profile may be inserted for easy and invisible fixing.

The profiles are covered with wooden finishes that are highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Plus anodized finishes. The **PROFIXER LINE SYSTEM** profiles are recommended for floors up to 22.5 mm thick.

transition profiles

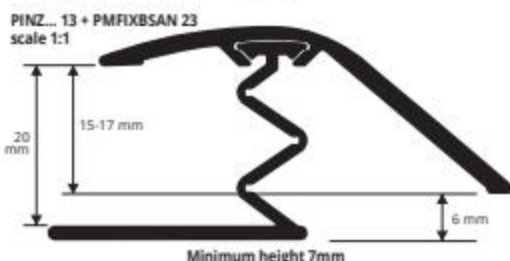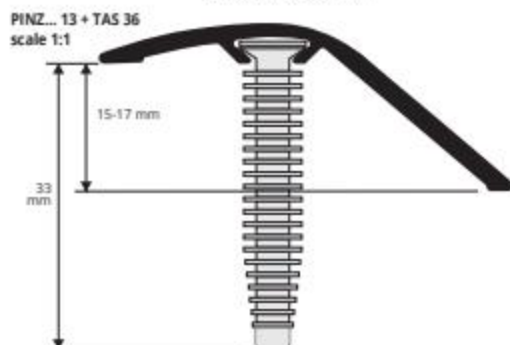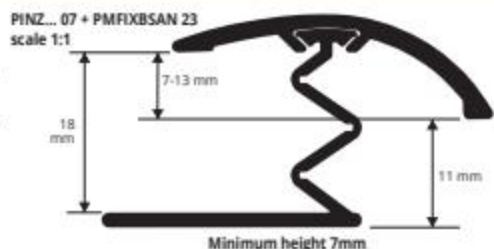

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	H mm	€/lm	€/Pc
PINZ... 07	40	7 - 13	8,57	23,14
PINZ... 13	47	15 - 17	12,30	33,21

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 04W - 05W - 18W - 29W - 30W - 31W - 33W - 34W - 42W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINZ... 07 (chosen finish anod. gold) PINZAO 07.



ALUMINIUM COVERED (11 wooden finishes)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	H mm	€/lm	€/Pc
PINZ... 07	40	7 - 13	15,71	42,42
PINZ... 13	47	15 - 17	18,64	50,33

ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 0,90 lm - 20 Pcs

Article	L mm	H mm	€/Pc
PINZ... 07S	40	7 - 13	10,62
PINZ... 13S	47	15 - 17	12,98

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 04W - 05W - 18W - 29W - 30W - 31W - 33W - 34W - 42W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINZ... 07 (chosen finish anod. gold) PINZAO 07.

ALUMINIUM COVERED (11 wooden finishes) thermo packed 0,90 lm 20 Pcs

Article	L mm	H mm	€/Pc
PINZ... 07S	40	7 - 13	17,53
PINZ... 13S	47	15 - 17	19,84

1. Choose the PROFIXER LINE SYSTEM profile in the required type and finish. 2. Cut the profile to the required length. 3a. For the version with screw anchors: make 5 drill holes per linear metre on the floor using a Ø 7mm drill, insert the anchors into the relative groove/channel of the profile and with the help of a rubber/plastic hammer, tap evenly over the surface until the anchor slots into the hole. 3b. For the version with tap-down aluminium base: first insert the base into the groove/channel of the "TOP" profile and then fix or glue the base to the floor; alternatively first fix or glue the base to the floor and then insert the 'profile'. 4. Close the profile, applying uniform pressure, either manually or with the help of a rubber hammer.

COLOURS

(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED						ON DEMAND - MINIMUM QUANTITY 200 PCS			
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium				
04W - Dark beech	05W - Light oak (strip)	18W - Light zerbano	29W - White oak	30W - Grey oak	31W - Victoria oak	33W - Sawn oak	34W - Havana oak	42W - Grace oak	
75W - Listerd									

© 2020 All rights reserved by Progress Profiles. Printed in Italy

NYLON 36 SCREW ANCHORS AND TAP-DOWN BASE

SCREW ANCHORS 36 - H 36 mm - pack. 20 Pcs
for SOL 30-40-50 and ZERO CURVE 07-15

Article	H mm	€/Pc	€/Pack.
TAS 36	36	0,28	5,60

minimum order 5 pcs.



PROFIXER TAP-DOWN BASE - ALUM. PUNCHED/PERFORED
for SOL 30-40-50 and ZERO CURVE 07-15
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PMFIXBSAN 23	23	6,94	18,74



The **PROFIXER LINE SYSTEM** comprises an assortment of profiles in aluminium with a longitudinal dovetail groove/channel into which the anchors or the tap-down punched/perforated aluminium profile may be inserted for easy and invisible fixing.

The profiles are covered with wooden finishes that are highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Plus six anodized finishes (3 available on demand). The **PROFIXER LINE SYSTEM** profiles are recommended for floors up to 22.5 mm thick.

PROFIXER LINE SYSTEM

INSERTS SOL 30 - SOL 40P - SOL 50
+ NYLON ANCHORS + BASE



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PINS... 30	30	6,26	16,90
PNSP... 40P	40	8,08	21,82

ANODIZED ALUM. (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 0,90 lm - 20 Pcs with 5 anchors

Article	L mm	€/Pc
PINS... 309S	30	7,33

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs)

ALUMINIUM COVERED (10 wooden finishes)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PINS... 30	30	11,74	31,70


ALUMINIUM COVERED (10 wooden finishes)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PNSP... 40 P	40	14,77	39,88

Available in the colours: 04W - 05W - 18W - 29W - 30W - 31W - 33W - 34W - 42W - 75W. The code of the selected colour must be added to the article code.
E.g.: PINS... 30 (chosen finish anod. gold) PINSAO 30.

ANODIZED SILVER ALUMINIUM
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINSAA 50	50	8,88	23,98

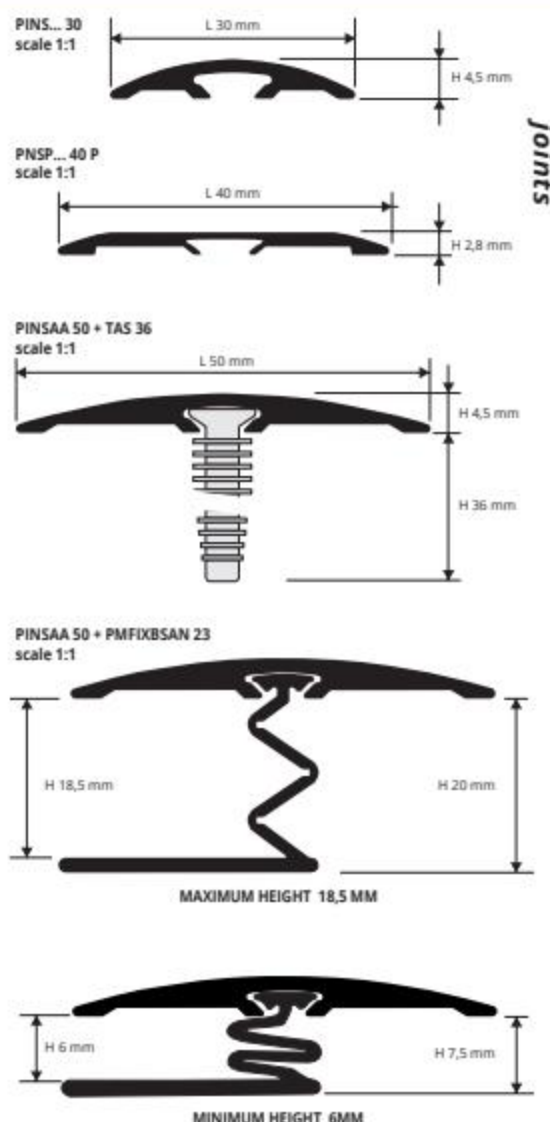


NYLON 36 SCREW ANCHORS AND TAP-DOWN BASE

SCREW ANCHORS 36 - H 36 mm - pack. 20 Pcs
for SOL 30-40-50 and ZERO CURVE 07-15

Article	H mm	€/Pc	€/Pack.
TAS 36	36	0,28	5,60

minimum order 5 pcs.



PROFIXER TAP-DOWN BASE - ALUM. PUNCHED/PERFORATED
for SOL 30-40-50 and ZERO CURVE 07-15
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PMFIXBSAN 23	23	6,94	18,74



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROFIXER LINE SYSTEM profile in the required type and finish. 2. Cut the profile to the required length.

For the version with screw anchors:

3. Make 5 drill holes per linear metre on the floor using a Ø 7mm drill, insert the anchors into the relative groove/channel of the profile and with the help of a rubber/plastic hammer, tap evenly over the surface until the anchor slots into the hole.


For the version with tap-down aluminium base:

3. First insert the base into the groove/channel of the "TOP" profile and then fix or glue the base to the floor; alternatively first fix or glue the base to the floor and then insert the profile. 4. Close the profile, applying uniform pressure, either manually or with the help of a rubber hammer.

PROSCREW 44

ANODIZED SILVER, GOLD, BRONZE, SAND
AND CHAMPAGNE ALUMINIUM

PSWC... 44
scale 1:1

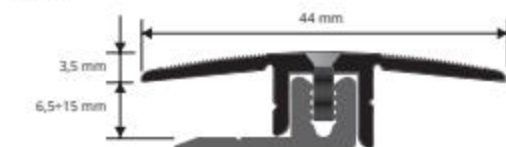

BASE + TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND
CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS
thermo packed - bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSWCAA 44	44	17,76	47,95
PSWCAO 44	44	17,76	47,95
PSWCSB 44	44	18,64	50,33
PSWCAB 44	44	18,64	50,33
PSWCCH 44	44	18,64	50,33


To order the following items (top and base), see page 259
Add + 5% of the price €/lm for the self pack version 0,90 lm

TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND
CHAMPAGNE ALUMINIUM thermo packed
bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSWAA 44	44	10,48	28,30
PSWAO 44	44	10,48	28,30
PSWSB 44	44	11,53	31,13
PSWAB 44	44	11,53	31,13
PSWCH 44	44	11,53	31,13

BASE IN NATURAL ALUMINIUM
thermo packed - bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSWBAN 07F	22,6	6,07	16,39



PROSCREW 33

ANODIZED SILVER, GOLD, BRONZE, SAND
AND CHAMPAGNE ALUMINIUM

PSWC... 33
scale 1:1



BASE + TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND
CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS
thermo packed - bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSWCAA 33	33	16,92	45,68
PSWCAO 33	33	16,92	45,68
PSWCSB 33	33	17,76	47,95
PSWCAB 33	33	17,76	47,95
PSWCCH 33	33	17,76	47,95


To order the following items (top and base), see page 259
Add + 5% of the price €/lm for the self pack version 0,90 lm

TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND
CHAMPAGNE ALUMINIUM thermo packed
bar length 2,7 lm - pack 20 Pcs - 54 lm


Article	L mm	€/lm	€/Pc
PSWAA 33	33	9,29	25,08
PSWAO 33	33	9,29	25,08
PSWSB 33	33	10,21	27,57
PSWAB 33	33	10,21	27,57
PSWCH 33	33	10,21	27,57

BASE IN NATURAL ALUMINIUM
thermo packed - bar length 2,7 lm - pack 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSWBAN 07F	22,6	6,07	16,39



COLOURS



ON DEMAND (minimum quantity 100 pcs)





TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSWAA 50	50	11,70	31,59
PSWAO 50	50	11,70	31,59
PSWSB 50	50	12,89	34,80
PSWAB 50	50	12,89	34,80
PSWCH 50	50	12,89	34,80




BASE + TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSWCAA 50	50	18,52	50,00
PSWCAO 50	50	18,52	50,00
PSWCSB 50	50	19,27	52,03
PSWCAB 50	50	19,27	52,03
PSWCCH 50	50	19,27	52,03

BASE IN NATURAL ALUMINIUM thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	L mm	€/lm	€/Pc
PSWBAN 07F	22,6	6,07	16,39

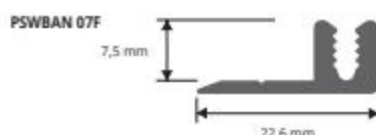



PROSCREW 50

ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM

PSWC... 50
scale 1:1

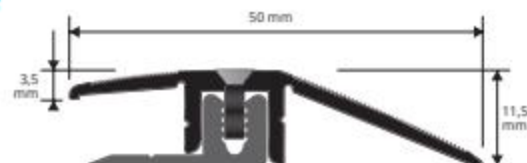

universal joints with screw

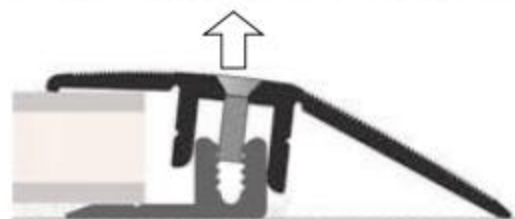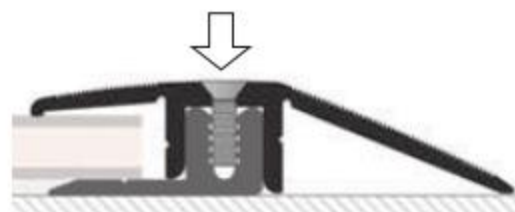

SCREWS to fix all perforated versions

NICKEL PLATED

WHITE NICKEL-PLATED FLATHEAD SCREW UNI 7688 3X10
pack. 14 Pcs

Article	Ø mm	H mm	€/Pack.
VIZBP 310	05	10	4,04

WHITE NICKEL-PLATED FLATHEAD SCREW UNI 7688 3X16
pack. 14 Pcs

Article	Ø mm	H mm	€/Pack.
VIZBP 316	05	16	4,04

VIZBP 310



VIZBP 316




KIT PROSCREW

KIT PROSCREW

Article	€/KIT
KIT PROSCREW	6,73

KIT consists of 14 screws VIZBP 310, 14 screws VIZBP 316, 15 screws + screw anchors VINPT 325


KIT PROSCREW



VIZBP 310




VIZBP 316



VINPT 325

EXAMPLES OF LAYING

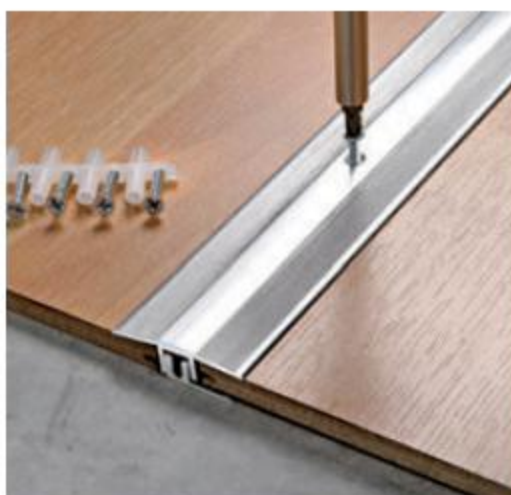

* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROSCREW 62


ANODIZED SILVER, GOLD, BRONZE, SAND
AND CHAMPAGNE ALUMINIUM



TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND
CHAMPAGNE ALUMINIUM bar length 2,7 lm

Article	L mm	€/lm	€/Pc
PSWAA 62	62	10,20	27,54
PSWAO 62	62	10,20	27,54
PSWAB 62	62	10,20	27,54
PSWCH 62	62	13,91	37,56
PSWSB 62	62	13,91	37,56

COLOURS



ON DEMAND (minimum quantity 200 pcs)



PROSCREW 74

ANODIZED SILVER, GOLD, BRONZE, SAND
AND CHAMPAGNE ALUMINIUM



TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND
CHAMPAGNE ALUMINIUM bar length 2,7 lm

Article	L mm	€/lm	€/Pc
PSWAA 74	74	12,88	34,78
PSWAO 74	74	12,88	34,78
PSWAB 74	74	12,88	34,78
PSWCH 74	74	14,17	38,26
PSWSB 74	74	14,17	38,26

COLOURS



ON DEMAND (minimum quantity 200 pcs)



BASE IN ALUMINIUM



BASE IN NATURAL ALUMINIUM - bar length 2,7 ml

Article	L mm	€/lm	€/Pc
PSWBAN 08F	32	6,70	18,09

EXAMPLES OF LAYING






SOL 30 (only top)

WOODEN-FINISHES AND ANODIZED FINISHES

joints

PINS... 30
scale 1:1



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PINS... 30	30	6,26	16,90

Available in the anodized finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs), 05W - 29W - 34W - 37W - 48W.
The code of the selected colour must be added to the article code. E.g.: PINS... 30 (chosen finish anod. gold) PINSAO 30.

ALUMINIUM COVERED (2 wooden finishes)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PINS... 30	30	11,74	31,70

TERMINAL PIN (only top)

WOODEN-FINISHES AND ANODIZED FINISHES

terminal
outerprofiles

PINTP... 10
scale 1:1



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PINTP... 10	10	9,12	24,62

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 05W - 18W - 30W - 31W - 33W - 34W - 37W - 48W.
The code of the selected colour must be added to the article code. E.g.: PINTP... 10 (chosen finish anod. gold) PINTPAO 10.

ALUMINIUM COVERED (8 wooden finishes)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PINTP... 10	10	15,40	41,58

ZERO CURVE 07-09-13-15 (only top)


WOODEN-FINISHES AND ANODIZED FINISHES

transition
profiles


PINZ... 07
scale 1:2




PINZ... 09
scale 1:2



PINZ... 13
scale 1:2



PINZ... 15
scale 1:2



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm
pack. 20 Pcs - 54 lm (H 7 - H 9 mm - 108 lm)

Article	H mm	€/lm	€/Pc
PINZ... 07	7 / 11	8,57	23,14
PINZ... 09	11 / 14	9,31	25,14
PINZ... 13	15 / 17	12,30	33,21
PINZ... 15	19 / 22	12,90	34,83

Available in the anodized finishes: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 04W - 05W - 18W - 29W - 30W - 31W - 33W - 34W - 42W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINZ... 07 (chosen finish anod. gold) PINZAO 07.

ALUMINIUM COVERED (10 wooden finishes)
thermo packed - bar length 2,7 lm
pack. 20 Pcs - 54 lm (H 7 - H 9 mm - 108 lm)


Article	H mm	€/lm	€/Pc
PINZ... 07	7 / 11	15,71	42,42
PINZ... 09	11 / 14	16,29	43,98
PINZ... 13	15 / 19	18,64	50,33
PINZ... 15	19 / 22	20,36	54,97

STYLE STAIR (only top)

WOODEN-FINISHES AND ANODIZED FINISHES

stair nosing
profiles

PINY...



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PINY...	27,5 x 25	9,77	26,38

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 05W - 18W - 21W - 29W - 30W - 31W - 33W - 34W - 36W - 37W.
The code of the selected colour must be added to the article code. E.g.: PINY... (chosen finish anod. gold) PINYAO.

ALUMINIUM COVERED (10 wooden finishes)
thermo packed - bar length 2,7 lm - pack. 10 Pcs - 27 lm


Article	L x H mm	€/lm	€/Pc
PINY...	27,5 x 25	16,49	44,52

STYLE STAIR L (only top)

WOODEN-FINISHES AND ANODIZED FINISHES

stair nosing
profiles

PINYL...



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PINYL...	45 x 23,8	10,76	29,05

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 05W - 34W - 37W - 44W.
The code of the selected colour must be added to the article code. E.g.: PINYL... (chosen finish anod. gold) PINYLAO.

ALUMINIUM COVERED (4 wooden finishes f which 57 on demand)
thermo packed - bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	L x H mm	€/lm	€/Pc
PINYL...	45 x 23,8	18,15	49,01

SOL 40 P (only top)

WOODEN-FINISHES AND ANODIZED FINISHES

joints

PNSP... 40P
scale 1:1



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PNSP... 40P	40	8,08	21,82

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 04W - 05W - 18W - 29W - 30W - 31W - 33W - 34W - 42W - 75W. The code of the selected colour must be added to the article code. E.g.: PNSP... 40P (chosen finish anod. gold) PNSPAO 40P.

ALUMINIUM COVERED (10 wooden finishes)
thermo packed - bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	L x H mm	€/lm	€/Pc
PNSP... 40P	40	14,77	39,88


INTERCHANGEABLE INSERT

RIGID IMPACT-RESISTANT
NO-TOXIC VINYL RESIN

RIGID IMPACT-RESISTANT NO-TOXIC VINYL RESIN
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PIN 07	7	1,38	3,73
PIN 09	9	1,51	4,08
PIN 11	11	1,67	4,51
PIN 13	13	1,81	4,89
PIN 15	15	1,96	5,29
PIN 17	17	2,14	5,78
PIN 19	19	2,28	6,16

FOR SOL 40 P AND TERMINAL PIN

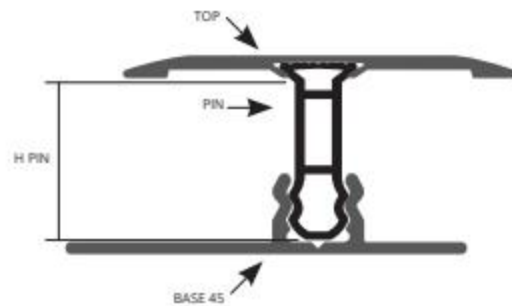

RIGID IMPACT-RESISTANT NO-TOXIC VINYL RESIN
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PIN 09	9	1,51	4,08
PIN 11	11	1,67	4,51
PIN 13	13	1,81	4,89
PIN 15	15	1,96	5,29
PIN 17	17	2,14	5,78
PIN 19	19	2,28	6,16

FOR ZERO CURVE, STYLE STAIR

PIN 07
scale 1:1



PIN 09
scale 1:1



PIN 11
scale 1:1



PIN 13
scale 1:1



PIN 15
scale 1:1



PIN 17
scale 1:1



PIN 19
scale 1:1



For a correct assembly, see the drawings of the complete products in the previous pages

PROINSERT BASE 45 AND BASE 40

NATURAL ALUMINIUM



ALUM. PUNCHED/PERFORED FOR SOL 30-40-50 AND ZERO CURVE
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	width mm	€/lm	€/Pc
PINBFT 45	45	6,56	17,71
PINBFT 40	40	6,48	17,50



PINBFT 45
scale 1:1



PINBFT 40
scale 1:1



SCREWS and SCREW ANCHORS to fix all perforated version

NICKEL-PLATED

NICKEL - PLATED FLATHEAD SCREWS + SCREW ANCHORS
pack 1.000 Pcs

Article	Ø mm	length mm	€/Pack.
VINIPT 325	03	25	94,28

BRASS - PLATED FLATHEAD SCREWS + SCREW ANCHORS
pack 1.000 Pcs

Article	Ø mm	length mm	€/Pack.
VIOTPT 325	03	25	94,28

