



Product Specification Sheet

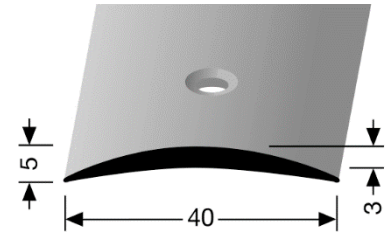

- **Profile Type:**

462

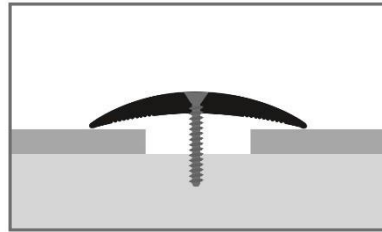

- **Description:**

Transition profile, centrally countersunk drilled

- **Application:**

For transitions with resilient, textile, ceramic or hard or hard floor coverings in living areas.

- **Length:**

5,0 m
2,7 m
1,0 m
0,9 m

Distance between drill holes: 16,6 cm

Distance between drill holes: 15,0 cm

Distance between drill holes: 16,6 cm

Distance between drill holes: 15,0 cm

- **Width:**

40 mm

- **Height:**

5,0 mm

- **Thickness:**

3,0 mm

- **Alloy:**

Aluminium: EN AW-6060

- **Aluminium Colours:**

Alu polished	F3
Alu anodized silver	F4
Alu anodized sand	F9
Alu anodized gold	F5
Alu anodized bronze	F6
Alu anodized stainless steel brushed	F2G

- **Fire protection class:** A1 = non flammable

The indicated data are typical or average values, but are not assured attributes.

Installation

Fastening with Torx screws Ø 3.5 mm. The substrate must be level, hard, dry and load-bearing.