



Product specification sheet

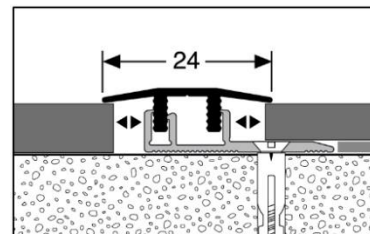

- **Profile type:**

578



- **Product group:** **Design-Clip®** (Trademark of Küberit)
- **Description:** connecting profile, a patented two part clip system for floating installation of floorings
- **Application:** transition or connections of floorings, especially for click LVT and carpets
- **Length:** 3.0 m / 2.7 m / 1.0 m / 0.9 m
- **Width:** 24 mm
- **Expansion:** 2 x 6 mm
- **For floor thickness:**

LVT	4 to 7.5 mm with a 2 mm underlay
Carpets	5 to 12 mm
- **Material:** aluminium
- **Alloy of the profile:** Aluminium EN AW-6060
- **Aluminium colors:** anodized in F4 silver, F5 gold, F6 bronze, F2G stainless steel optic mat brushed, F9 sand as well as F3 polished
- **Wood decors:** 6 wood decors are available, see brochure or website for more information
- **Digital printed decors:** colour matching decors with digital printed technology possible with abrasion surface of AC3 to AC5



Product specification sheet



The indicated data are typical or average values, but are not assured attributes.

This product is not subject to the Construction Products Regulation.

Installation

1. Screw or dowel the base profile (=plug mounting). In case of floor heating, fix the profile by using a 2-components glue.
2. Adapt the hard floor covering and pay attention to the expansion joint.
3. Put the top profile carefully on the base profile, bring it first into the right position, then clip-in the top profile by well controlled hammer blows.
Attention: Never use the hammer directly but use a hardwood with felt.
4. Finished!

For further information of the installation use the brochure Design-Clip® from our website or additional installation information as well as our installation video.