


Product specification sheet



- **Profile type:**

587

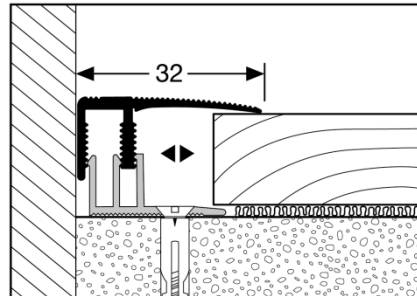

- **Product group:** Euro-Clip® (Trademark of Küberit)
- **Description:** end- or border profile (L-profile), a patented two part clip system for floating installation of floorings
- **Application:** for all hard floor coverings boarding to walls where a skirting can't be installed as terrace doors or brick walls
- **Length of the profile:** 3.0 m / 2.7 m / 1.0 m / 0.9 m
- **Width of the top profile:** 32 mm
- **Expansion:** 10 mm
- **For floor thickness:** 10 to 16 mm with a 2 mm underlay
- **Material:** aluminium
- **Alloy of the profile:** AlMgSi0,5F22
- **Aluminium colors:** anodized in F4 silver, F5 gold, F6 bronze, F2 stainless steel optic, F2 sand as well as F3 polished
- **Wood decors:** 15 wood decors are available, see brochure or website for more information
- **Real wood, cork:** 8 real wood veneers and one real cork available
- **Digital printed decors:** colour matching decors with digital printed technology possible with abrasion surface of AC3 to AC5



Product specification sheet



The indicated data are typical or average values, but are not assured attributes.

This product is not subject to the Construction Products Regulation.

Installation

1. Screw or dowel the base profile (=plug mounting). In case of floor heating, fix the profile by using a 2-components glue.
2. Adapt the hard floor covering and pay attention to the expansion joint.
3. Put the top profile carefully on the base profile, bring it first into the right position, then clip-in the top profile by well controlled hammer blows.
Attention: Never use the hammer directly but use a hardwood with felt.
4. Finished!

For further information of the installation, use the brochure Euro-Clip® from our website or additional installation information as well as our installation video.